

## BEAM SMART PENDANT

SKU# 028132, 028133

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 3-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.
- This luminaire is not suitable for use with wall switch dimmers. Warranty will be void if the luminaire is used on the same circuit that has a wall switch dimmer. Dimming of this luminaire is done via the Lucci Connect APP.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations Do not exceed the maximum wattage rating.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Dimming of this luminaire is done via the Lucci Connect APP. This luminaire is not suitable for use with a wall switch dimmer. Warranty will be void if the luminaire is used on the same circuit that has a wall switch dimmer.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

## Installation Directions

**NOTE:** Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

**NOTE:** Due to the size of the luminaire, two people will be required to lift it up during the installation process.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the canopy (E) by loosening the screws (C)
3. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
4. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wires to the terminal block (I), ensure the wires are secure and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N

Brown or L

**NOTE:** The luminaire is a Class I product and must be earthed during wiring and installation.

6. Determine the suspension length required for your installation by press in the cord anchorages (F) and then adjust the length of the suspension cords (G). Ensure the rest of the suspension wires are tightened & well placed inside the canopy.
7. Attach the canopy (E) back onto the mounting bracket (B) and secure it by tightening the screws (C) on the side.
8. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.
9. Double press the touch switch (H) to turn the luminaire ON or OFF.
10. Short press the touch switch (H) to change between the 4 different scene settings:

**SLEEP:** 2200K at 500 lumens.


**NIGHT:** 3000K at 1900 lumens.

**DAY:** 5000K at 2200 lumens.

**COLOUR:** Cycle through 7 different colours.

**NOTE:** Using the touch switch to operate this luminaire will only cycle through the different scene settings. For full control/function such as dimming, colour temperature, LED colours; the Lucci Connect APP is required.

11. Refer to the Lucci Connect User Guide for the installation and use of the Lucci Connect APP.

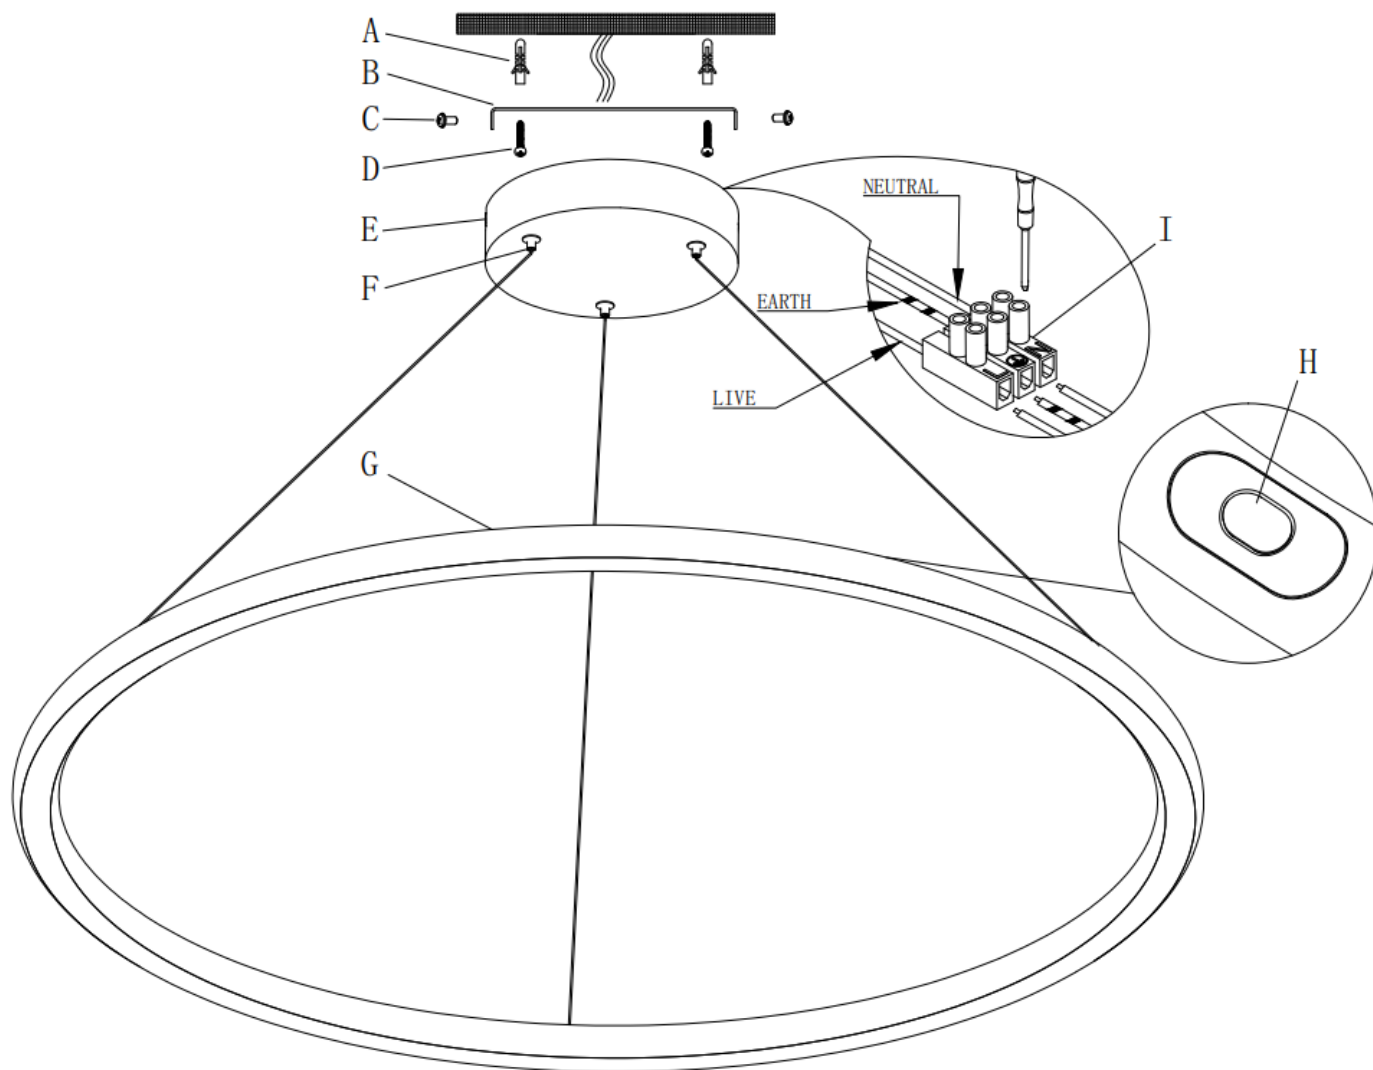

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the product.

Specifications		
SKU#	028132	028133
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	40W Max.	
Connectivity	Bluetooth 5.2 or WiFi 2.4GHz	
LED Specs	Colour Switching LEDs, CRI≥90, Dimmable via Lucci Connect App	
Colour Temperature and Lumens	<b>SLEEP:</b> 2200K at 750 lumens. <b>NIGHT:</b> 3000K at 1900 lumens. <b>DAY:</b> 5000K at 2200 lumens. <b>COLOUR:</b> Cycle through 7 different colours	
Weight	2.3kg	
Canopy Dimensions	D:180mm H:40mm	
Luminaire Dimensions	D:800mm H:32mm Susp:2000mm MAX	