

LONDON 1LT S14D WALL BRACKET

SKU# 190156, 190157, 190158, 190159, 190160, 190161

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. e.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class II product and must be maintained during wiring and installation.
- This luminaire is rated IP44 and must be maintained during wiring and installation.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.

NOTE: To maintain the IP44 rating;

- **The recommended lamp to use is SKU# 120009 OSRAM LEDinestra AC42808 (sold separately).**
- **Or alternately a S14d linear tubular lamp with a 28mm diameter.**
- **Check and ensure the moulded grommet (F) forms a tight seal around the S14d linear tubular lamp (H – not included).**
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Use the lamp holder cap (B) as template to mark the screw hole positions on the mounting surface and drill the holes.
3. Insert the mains supply wire through the back of the rectangle grommet (A).

4. Connect the mains supply wire to the lamp holder cap (B).

Mains Supply Wire

Live – Brown or Red

Neutral – Blue or Black

Terminal Block

L

N

NOTE: Ensure the wire ends are crimped and there are no loose strands or bare wires.

NOTE: This luminaire is a Class II product and must be maintained during wiring and installation.

5. Install the rectangle grommet (A) and lamp holder cap (B) onto the mounting surface by using appropriately sized mounting screws (C). Ensure the mounting screws (C) used are suitable for the mounting surface and the surrounding environment.

NOTE: Check and ensure the rectangle grommet is straight and aligned with the base of the lamp holder cap (B).

NOTE: A non-corrosive bead of silicon MUST be applied before installation onto the mounting surface, ensuring that no water can run down into the cabling.

6. Before installation, place the screws (E) into the lamp holder body (D).

7. Install the body of the lamp holder (D) onto the lamp holder cap (B) and secure by tighten the screws (E) by hand. Do not use an electric/power screwdriver to tighten the screws (E).

8. Use glue to install and fix the moulded grommet (F) onto the front of the lamp holder body (D).


9. Install the decorative cover (G) over the lamp holder body (D).

10. Install a lamp (H – not included) into the lamp holder (D). Do not exceed the maximum wattage rating.

NOTE: To maintain the IP44 rating;

- The recommended lamp to use is SKU# 120009 OSRAM LEDinestra AC42808 (sold separately).
- Or alternately a S14d linear tubular lamp with a 28mm diameter.
- Check and ensure the moulded grommet (F) forms a tight seal around the S14d linear tubular lamp (H – not included).

11. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

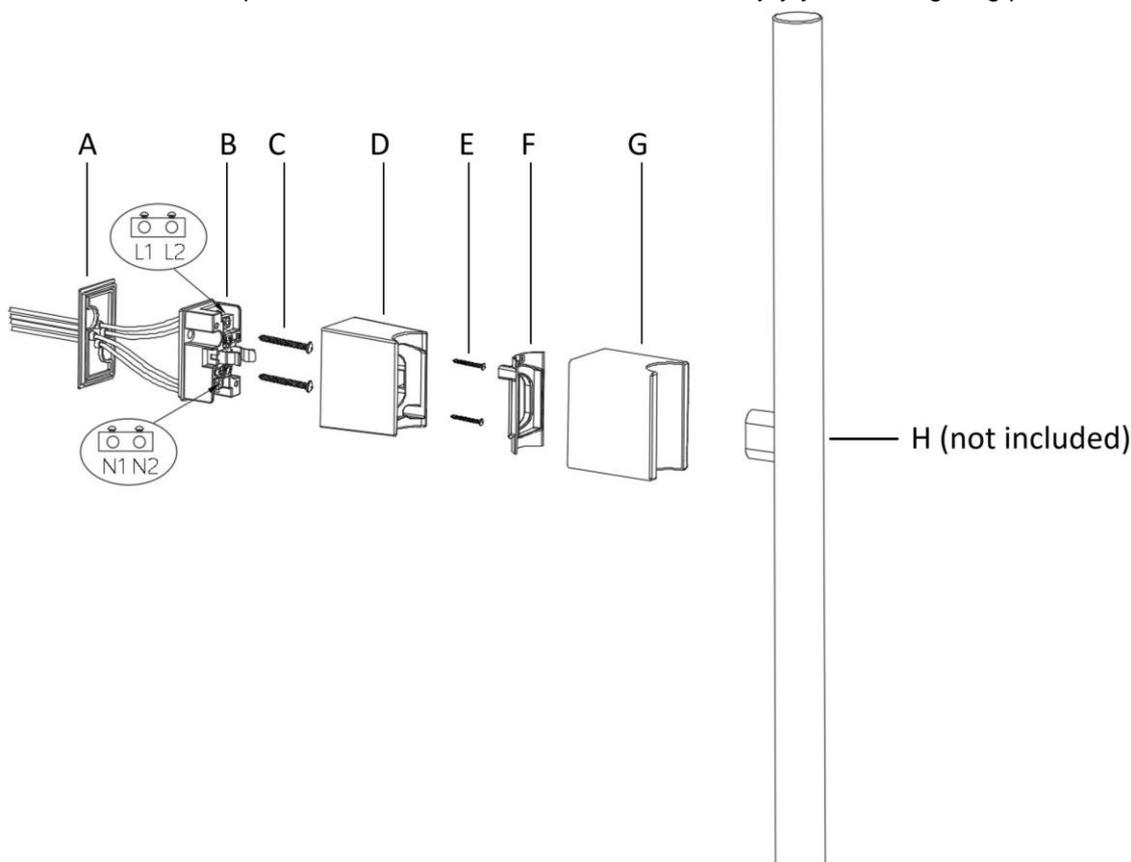

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	190156	190157	190158	190159	190160	190161
Colour	Black	White	Chrome	Brushed Chrome	Aged Brass Finish	Bronze Finish
Rated Voltage	220-240V~ 50Hz					
Rated Wattage	20W Max.					
Protection Class	Class II					
Lamp Holder	S14d					
IP Rating	IP44*					
Weight	0.2kg					
Dimensions	W:63mm H:38mm E:53mm					

***NOTE: To maintain the IP44 rating;**

The recommended lamp to use is: SKU# 120009 OSRAM LEDinestra AC42808 (sold separately).

Or alternately a S14d linear tubular lamp with a 28mm diameter.

Check and ensure the moulded grommet (F) forms a tight seal around the S14d linear tubular lamp (H – not included).