

ORION 5 LIGHT PENDANT

SKU# 011487

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Due to the size and weight of the fitting, two people may be required to lift up the fitting during installation

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non scratch surface.
2. Remove the mounting bracket (I) from the canopy (O) by loosening the screws (N) on the sides.
3. Use the mounting bracket (I) as a template to mark the screw positions on the ceiling.
4. Install the mounting bracket (I) onto the ceiling by using appropriately sized mounting screws (J) and anchors (H). Ensure the screws (J) and anchors (H) used are suitable for the mounting surface and the surrounding environment.
5. Decide on the suspension length of your pendant by installing the different sections of suspension rods (Q, R) onto the body (S) of your fitting. Feed the cords (P) through as you assemble to remove any slack. Take care not to cross thread or twist and damage the cords (P).
6. Pull the cords (P) up into the canopy (O) and attach the canopy (O) to the top of the suspension rod.

Installation Instructions

7. Install the star washer (G), earth wire (C) & its lug (F), spring washer (E) and then tighten with the nut (D).
Ensure the nuts (D) are fully tightened so there is an effective earth continuity.
8. Join all the 'Live' cords (Brown) from the fitting with one end of the lead cords together at the closed end connector (L).
9. Repeat the same step for all the 'Neutral' cords (Blue).
10. Use the cable tie (M) to fix the cords in place.
11. Wrap the heat shrink tube (K) onto each of the closed end connectors (L). Then use a heat gun (not included) to shrink the tube (K) until it is tightly secured to the connectors (L).
12. Connect the two lead cords and the mains supply wire to the terminal block (A) provided.


Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red


Fitting Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

13. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block (A).
14. Install the canopy (O) onto the mounting bracket (I) and secure by tightening the screws (N) on the sides.
15. Install the supplied globes (V) into the lamp holders (U). Do not exceed the maximum wattage rating.
NOTE: Do not touch the globes with bare hands. Oils or other impurities on your hands may damage the globe and reduce its life. Use a clean cloth or a clean piece of tissue paper.
16. Install the glass shades (W) onto the lamp shade holders (T).
17. After the full assembly and installation, switch on the fitting to test and enjoy your new lighting product.

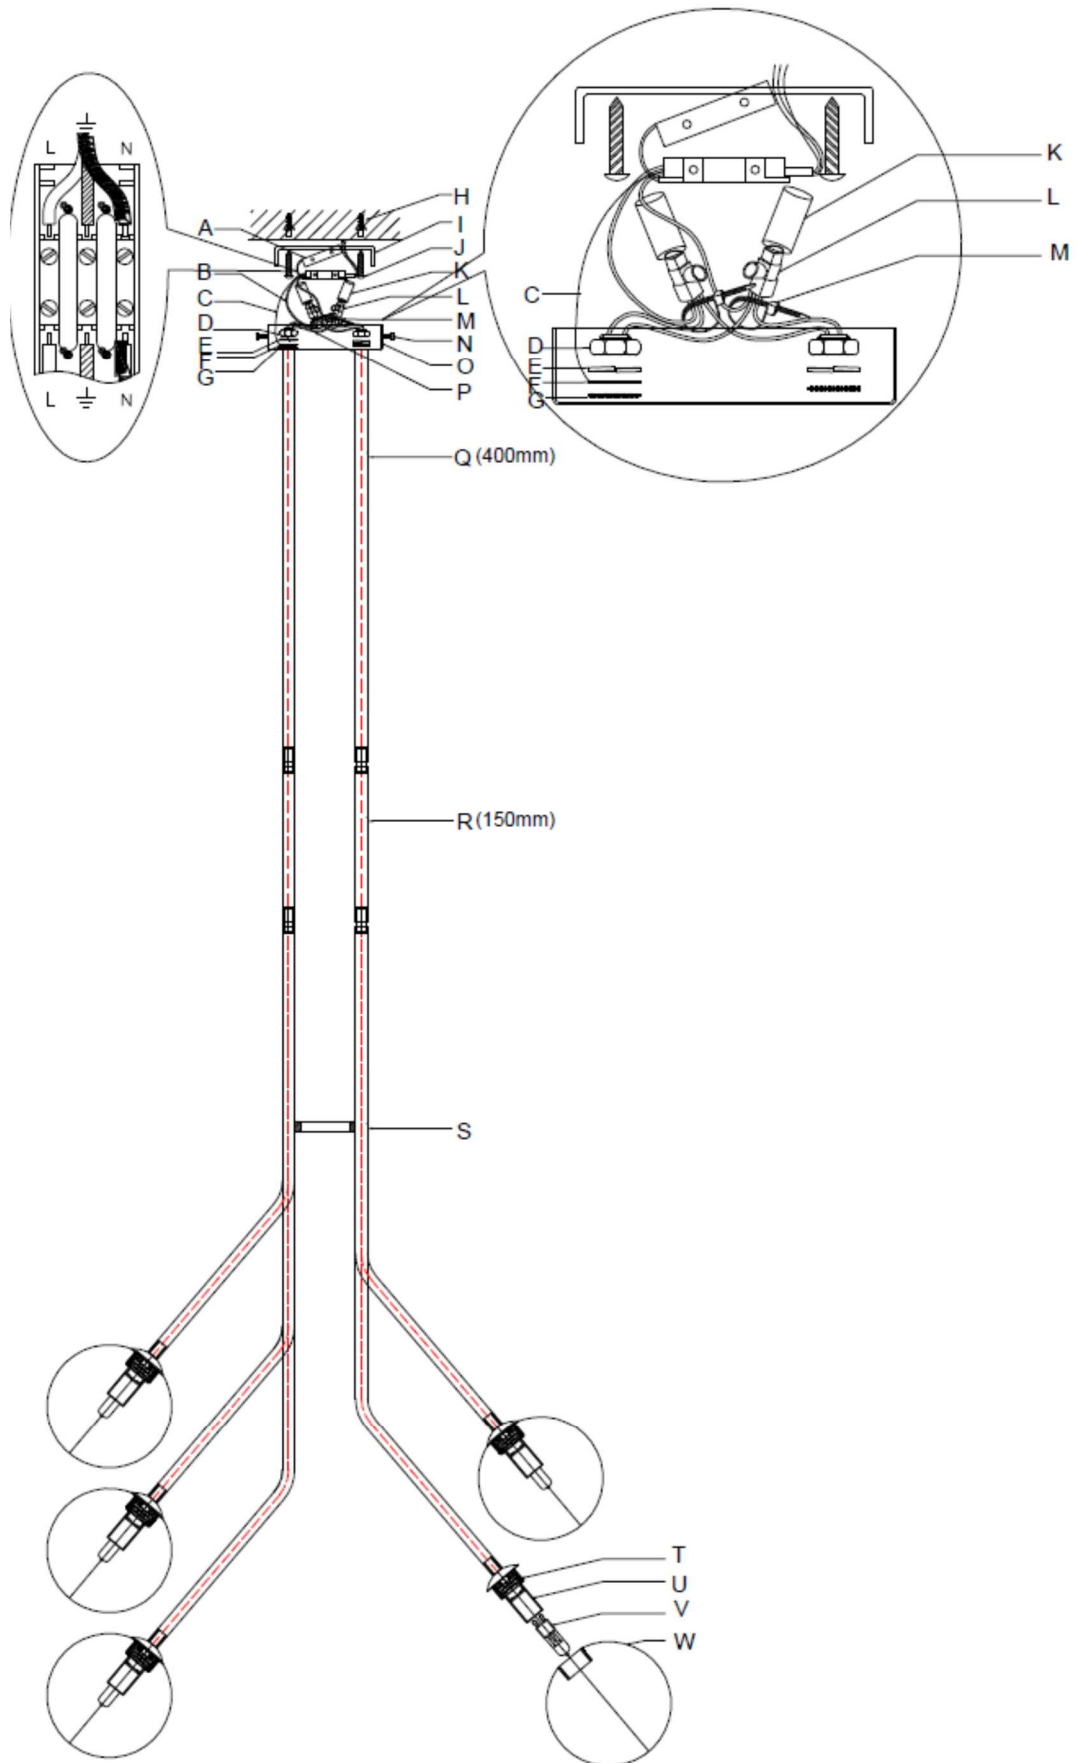

Installation Instructions

Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

Specifications

SKU #	011487
Colour	Matte Black with Smoke Glass Shades
Rated Voltage	220-240V~ 50Hz
Rated Wattage	140W Max. (5 x Max. 28W)
Lamp Holder	G9
Weight	2.8kg
Dimensions	H:825mm Dia:530mm Suspension:550mm