

## ARTISAN CYLINDER WALL BRACKET

SKU# 197040, 197041, 197042

Rated Voltage 220-240V~ 50Hz

**NOTE: The Artisan shade is sold separately.**

**This luminaire is rated IP44 only after a compatible Artisan shade & washers have been fully installed.**

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 3-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches. Warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch. This luminaire is dimmable using the built-in rotary dimmer switch on the luminaire.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. e.g. AS/NZS 3000 Electrical Installations.
- An isolation switch must be included in the wiring installation. A circuit breaker can be classified as an isolation switch. The isolation switch allows disconnecting of the luminaire and loads from the mains 240V AC power during maintenance and cleaning of the connected load. The integral dimmer on this luminaire does not provide full disconnection/off-state.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP44 only after a compatible Artisan shade (sold separately) & washer have been fully installed.
- The IP44 rating must be maintained during wiring and installation of the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire and its compatible shade.
  - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

## Installation Directions

**WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket from the luminaire by loosening the grub screws with the Allen key provided.
3. Use the mounting bracket as template to mark the screw positions on the mounting surface and drill holes. (Fig. 1)
4. Install the mounting bracket onto the mounting surface by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.

(Fig. 2 & 3)

**NOTE: Ensure the rubber washers are used to install the mounting bracket to maintain the IP rating.**

**NOTE: A non-corrosive bead of silicone MUST be applied before installation onto the wall ensuring that no water can run down into the cabling.**

5. Connect the mains supply wire to the terminal block. (Fig. 4)

**Mains Supply Wire**

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

**Luminaire Wire / Terminal block**

Yellow/Green or 

Blue or N

Brown or L

6. Ensure that the wires are secure, and no bare wires are exposed. (Fig. 4)
7. Carefully install the luminaire onto the mounting bracket, take care not to crush or squash any of the internal wires. Secure by tightening the grub screws on the sides. (Fig. 4)

**NOTE: Follow the directional label to ensure the luminaire is installed in the correct direction. The built-in rotary dimmer switch must be facing down.**


8. Install the Artisan shade (sold separately) & washers onto the luminaire. The compatible shades are:

- SKU# 197010, 197011 and 1pc washer. (Fig. 5a)
- SKU# 197012 and 3pcs washer. (Fig. 5b)
- SKU# 197013, 197058 and 6pcs washer (Fig. 5c)

**NOTE: Depending on the Artisan shade used, a different number of washers are required to maintain the IP rating of this luminaire. (Fig. 5a, 5b, 5c)**

**NOTE: Ensure the washer forms a tight seal around the rim of the shade and the luminaire.**

9. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new lighting product.
10. To operate the colour shifting function, either use the built-in rotary dimmer switch on the luminaire or use the wall switch connected to the luminaire.
  - When the luminaire is ON, rotate the built-in rotary dimmer switch OFF and ON again within 3 seconds OR use the wall switch to turn OFF and ON again within 3 seconds to change the colour temperature. The colour shifting sequence will jump from 3000K – 5000K – 4000K.
  - When the luminaire has been turned off for more than 7 seconds, it will memorise the brightness and colour temperature setting for when you turn on the luminaire again.

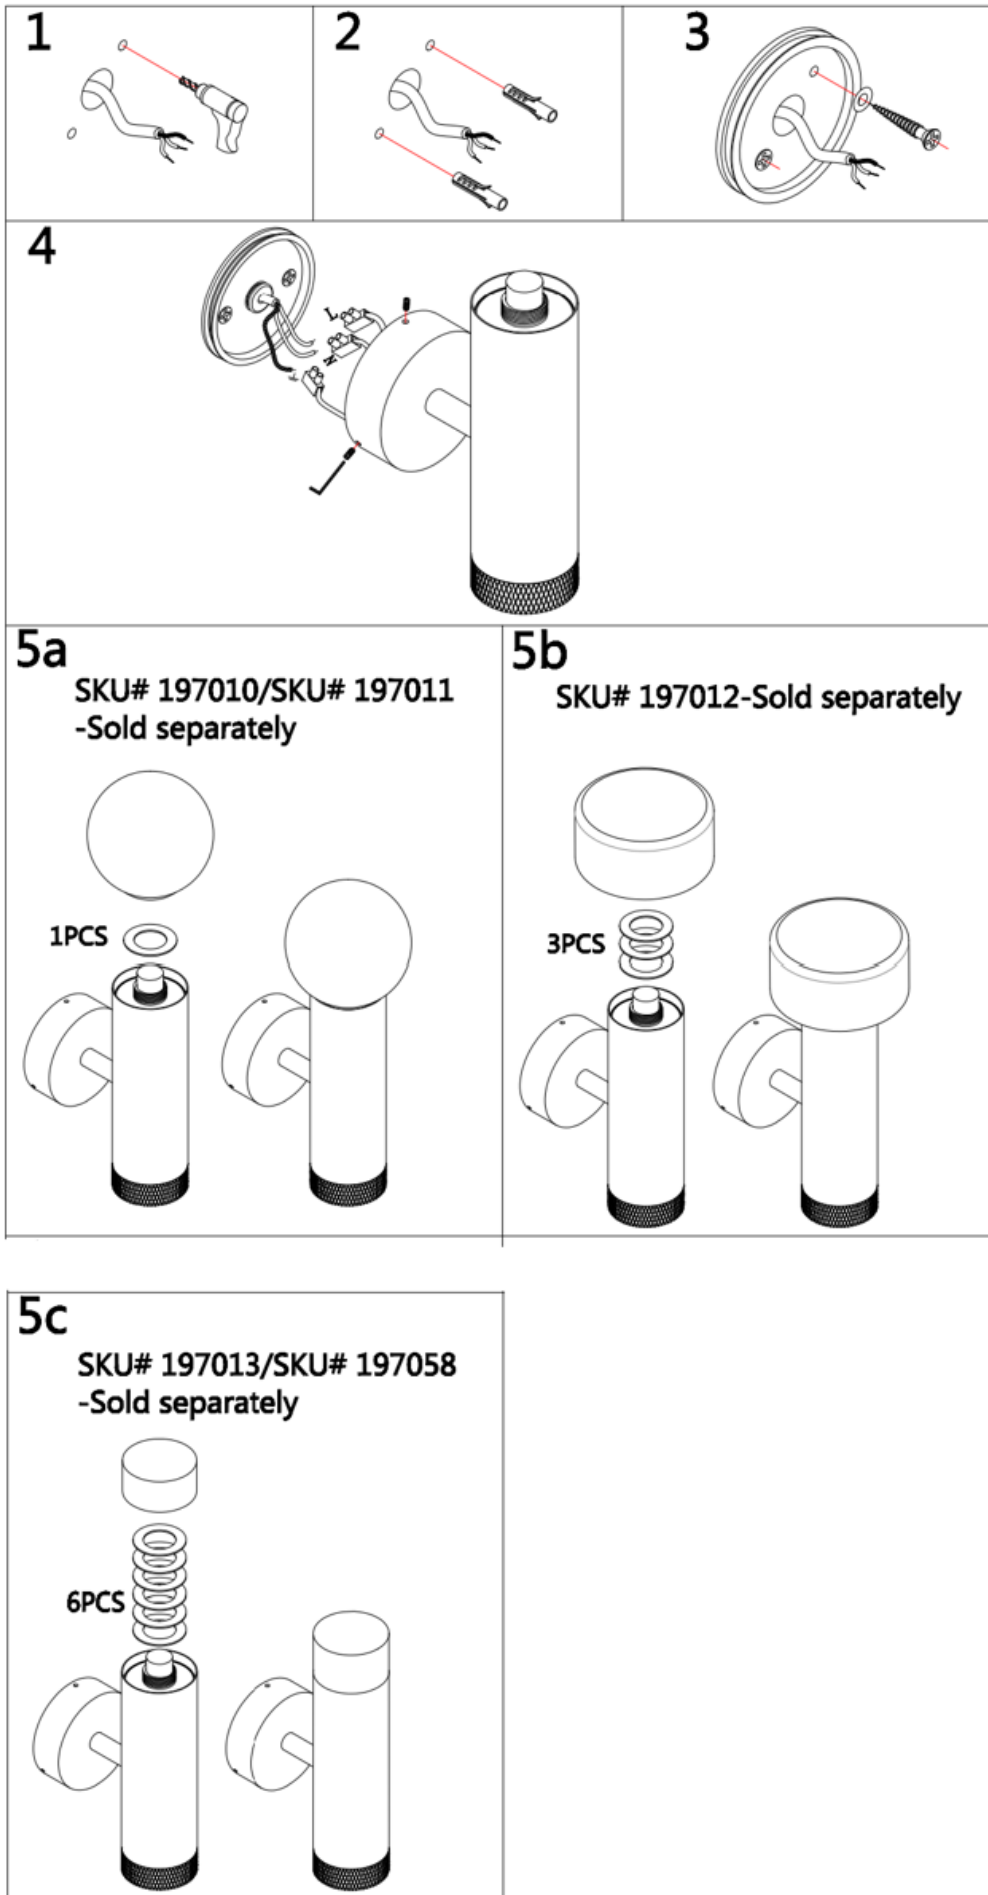

## Safety Tips

**NOTE: Always ensure the power is switched OFF from the isolation switch/mains before performing any maintenance cleaning or making any adjustment to the luminaire.**

- The integral dimmer on this luminaire does not provide full disconnection/off-state.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the product.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications			
SKU #	197040	197041	197042
Colour	Textured Black	Textured White	Brass Finish
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	12W		
Rated Lumens	CRI≥90 3000K – 550 lumens 4000K – 600 lumens 5000K – 600 lumens		
Weight	0.7kg (luminaire only)		
Dimensions	H:205mm W:85mm E:128mm (luminaire only)		
IP Rating	IP44* *Only after a compatible Artisan shade (sold separately) & washers have been fully installed		
Compatible Shades (Sold separately)	SKU# 197010 (0.2kg), SKU# 197011 (0.6kg), SKU# 197012 (0.2kg), SKU# 197013 (0.1kg). SKU# 197058 (0.2kg).		