

ESTHER PENDANT

SKU# 011580, 011581, 011582, 011583, 011584, 011585

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
Eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation directions


NOTE: Due to the size and weight of the fitting, two people may be required to lift up the fitting during installation

1. Determine the length of the suspension rod required for your installation location.
2. Install the required length of suspension rods (J, I, H, G) onto the body (K) of the fitting.
Pull the cord (M) out as you assemble, to remove any slack.
Take care not to cross thread or twist and damage the cord (M).
3. Pull the cord (M) up into the canopy (E) and attach the canopy (E) to the top of the suspension rod.
4. Remove the mounting bracket (B) from the canopy (E) by loosening the screws (F).
5. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
6. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A).
Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
7. Remove the cover from the terminal block (D) and connect the mains supply wire and fitting wires together.


Mains Supply Wire

Earth – Yellow/Green
 Neutral – Blue or Black
 Live – Brown or Red

Fitting Wire / Terminal block

Yellow/Green or 
 Blue or N
 Brown or L

8. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block (D).
9. Install the canopy (E) onto the mounting bracket (B) and secure by tightening the screws (F).
10. Install the globes (O – Not included) into the lamp holders (P). Do not exceed the maximum wattage rating.
11. Install the end cover (L) onto the body (K).
12. Place the glass shade (N) onto the lamp holders (P).
13. After the full assembly and installation, switch on the fitting to test and enjoy your new lighting product.

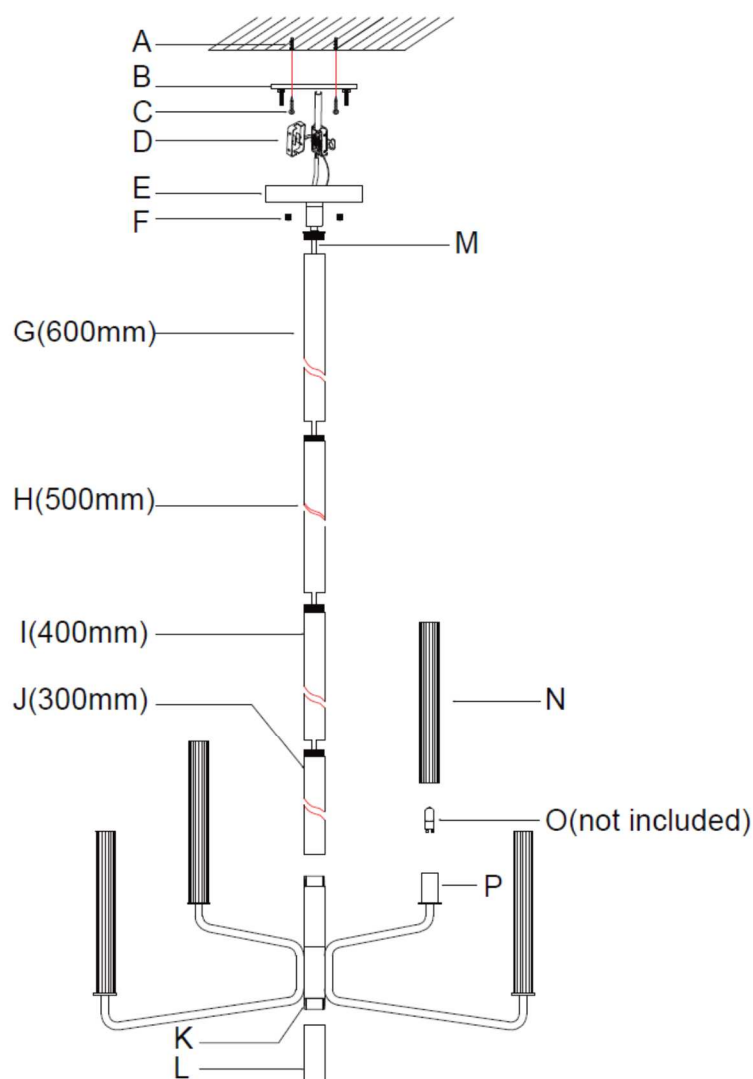

NOTE: Brass is designed to develop a natural patina finish over time. It can be polished back to its original finish if desired.

NOTE: A minimum clearance of 0.5m must be kept between the fitting and any walls or building elements when it is installed on the ceiling with a pitch angle. (Refer to the specification table for the maximum pitch angle).

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

Specifications

SKU #	011580	011581	011582	011583	011584	011585
Colour	Solid Brass	Gun Metal	Solid Brass	Gun Metal	Solid Brass	Gun Metal
Rated Voltage	220-240V~ 50Hz					
Rated Wattage	150W Max. (6 x Max. 25W)		250W Max. (10 x Max. 25W)		300W Max. (12 x Max. 25W)	
Lamp Holder	G9					
Weight	4.4kg		5.7kg		6.5kg	
Pitch angle	Max.45°					
Dimensions	H:470mm Dia:680mm Suspension:1800mm		H:500mm Dia:820mm Suspension:1800mm		H:565mm Dia:1200mm Suspension:1800mm	