

LUCCI CONNECT FESTOON LIGHT

SKU# 220992, 220993

Rated Voltage 12V DC

NOTE: This luminaire can be DIY and does not require any electrical connection or disconnection. When working with 240V, a licensed electrician is required.

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches. The warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire is designed to be used with a mains power socket-outlet (not included).
The installation location must have an existing mains power socket-outlet (not included) pre-installed.
If you don't have an existing mains power socket outlet (not included), please contact your licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical installations. If unsure, please contact a licensed electrician.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.

NOTE: The plug-in power supply & the control unit is rated IP20 and has no protection against water penetration. Must be installed in a dry location.

- Only use the supplied plug-in power supply with this luminaire.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket-outlet before or during assembly. Only do so after the luminaire is fully assembled and is ready to use for the first time.

Installation Directions

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Hang the luminaire up onto hooks or loop on your desire location.
2. Connect the luminaire to the control unit via the quick connector.
3. Connect the control unit to the plug-in power supply via the quick connector.

NOTE: The cap of the quick connector must be tightened to prevent water penetration.

NOTE: Only use the supplied plug-in power supply with this luminaire.


4. Insert the plug-in power supply into the mains power socket-outlet (not included) and ensure it is fully plugged in.
5. Switch on the power then set up the wireless & in-app control according to the '[Lucci CONNECT user guide](#)'.

NOTE: Turn on the Bluetooth function of your mobile phone before set-up.

NOTE: It is required to use with Lucci gateway (SKU# 299075, sold separately) to control via the internet or achieve voice control via Google Home/ALEXA.

NOTE: Check if the luminaires blink every 2 seconds before setting up. Hold the reset button on the control unit for 3s if the luminaires do not blink.

NOTE: Short press the reset button can also change the pre-set scenes manually.

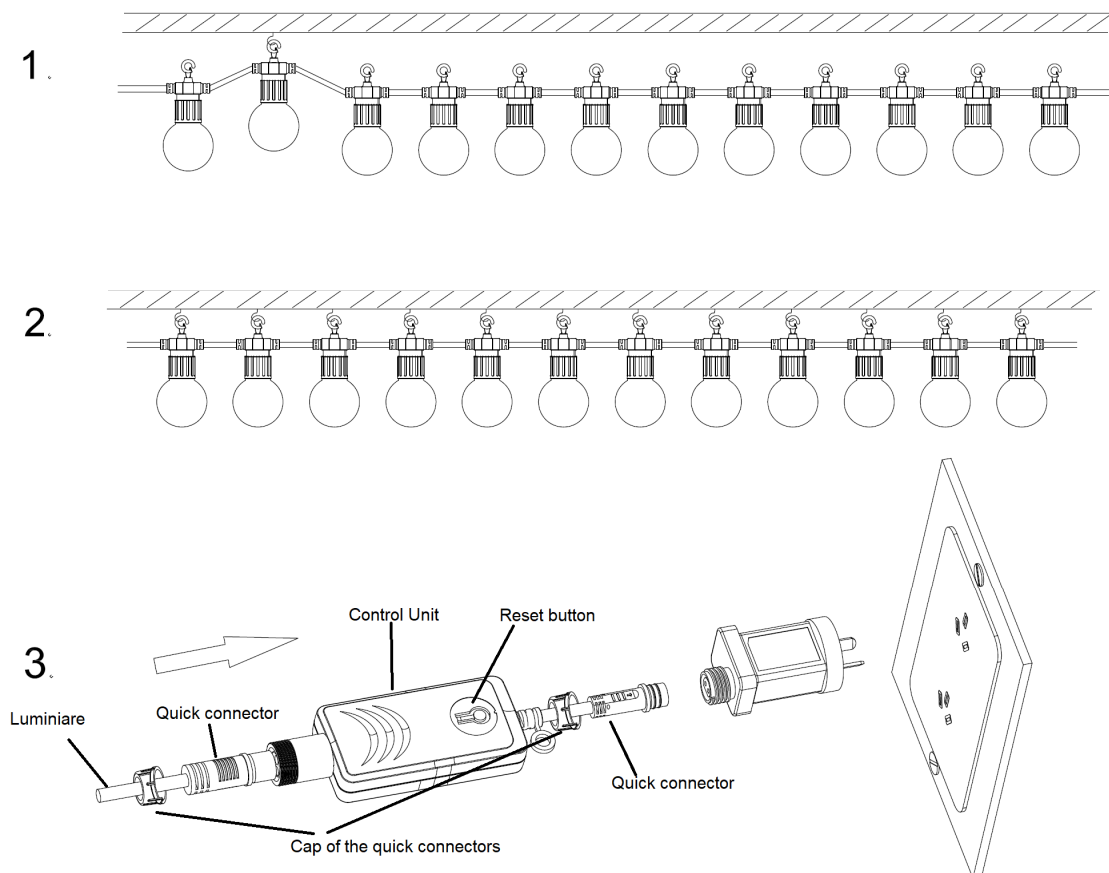

NOTE: The plug-in power supply & the control unit is rated IP20 and has no protection against water penetration. Must be installed in a dry location.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and connectors are secure before connecting the power.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire again.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the product.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.258 m is not expected.

Specifications

SKU #	220992	220993
Lights	10 Lights	20 Lights
Colour	Black	
Rated Voltage	12V DC	
LED Specs	8W, Max.100 lumen, 3000 - 6500K, Dimmable, RGB *CCT, Dimming, RGB can be adjusted via in-app control	12W, Max.120 lumen, 3000 - 6500K, Dimmable, RGB *CCT, Dimming, RGB can be adjusted via in-app control
Weight	0.8kg	1.4kg
Dimensions	L: 10m	L: 20m
Extension cable	5m extension cable provided	
IP Rating	IP65 (luminaire) IP20 (plug-in power supply & control unit)	