

SEASIDE TWIN PATH SPIKE SPOT

SKU# 220419, 229402

Rated Voltage 12V

- NOTE:** This installation instruction applies to the 12V side of the luminaire only.
This luminaire is rated 12V and is classified as ELV (Extra Low Voltage).
This luminaire can be DIY and does not require any electrical connection or disconnection.
Do not plug this luminaire directly into 240V.
When working with 240V, a licensed electrician is required.
The assistance of a technical person with the correct tools may be required to complete the install.
The Lucci wiring kit (SKU# 220826, 220827) and Lucci transformer (SKU# 220818, 220819, 220829) are sold separately.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-years warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches. The warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical installations. If unsure, please contact a licensed electrician.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire.
- Do not exceed the maximum wattage rating. This luminaire must be used with LED lamps only.
- Select a suitable location for installation:
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable direction; this must be maintained during installation.
 - The wiring kit and connectors are not suitable for underground installation without protection from water or damp conditions. Ensure they are positioned in a location where the water can be easily drained away. They are not designed to be immersed in water.
 - The installation location may require a gravel substrate to help with water drainage, to prevent the wiring kit and connectors being submerged in water after heavy rain or from watering the garden.
 - The mounting point must support 2 times the weight of the luminaire
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF, before commencing any electrical work.

Installation Directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
3. Remove the shades (D) from the spot heads (A) and use the suction cup (C) to help install the globes (B - not included) into the lamp holders. Do not exceed the maximum wattage rating.

NOTE: This luminaire must be used with LED lamps only.

4. Install the shades back (D) onto the spot heads (A).
5. Select a suitable location for installation, see the installation requirements on page 1. Ensure there is adequate space for the luminaire and wiring.
6. Use the quick connector (F) to connect the luminaire to the Lucci wiring kit (SKU# 220826, 220827 - sold separately). Ensure the connector is fully tightened.

NOTE: The Lucci wiring kit is rated for Max. 80VA load only.


7. Connect the Lucci wiring kit (SKU# 220826, 220827 – sold separately) to the Lucci transformer (G - SKU# 220818, 220818, 220829 – sold separately).

NOTE: Do not exceed the load of the Lucci wiring kit and Lucci transformer which are rated 80VA, 28VA and 10VA load respectively

8. Insert the Lucci transformer plug into mains power socket outlet (not included) and ensure it is fully plugged in.
9. Loosen the thread locker (E) and adjust the height of the luminaire to your desired angle.
10. Tighten the thread locker (E) to lock the height of the luminaire.
11. Adjust the spot heads (A) to your desired angle.

NOTE: Do not adjust the spot head (A) more than 90°, as this may damage the joint or the internal wiring.

12. Switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

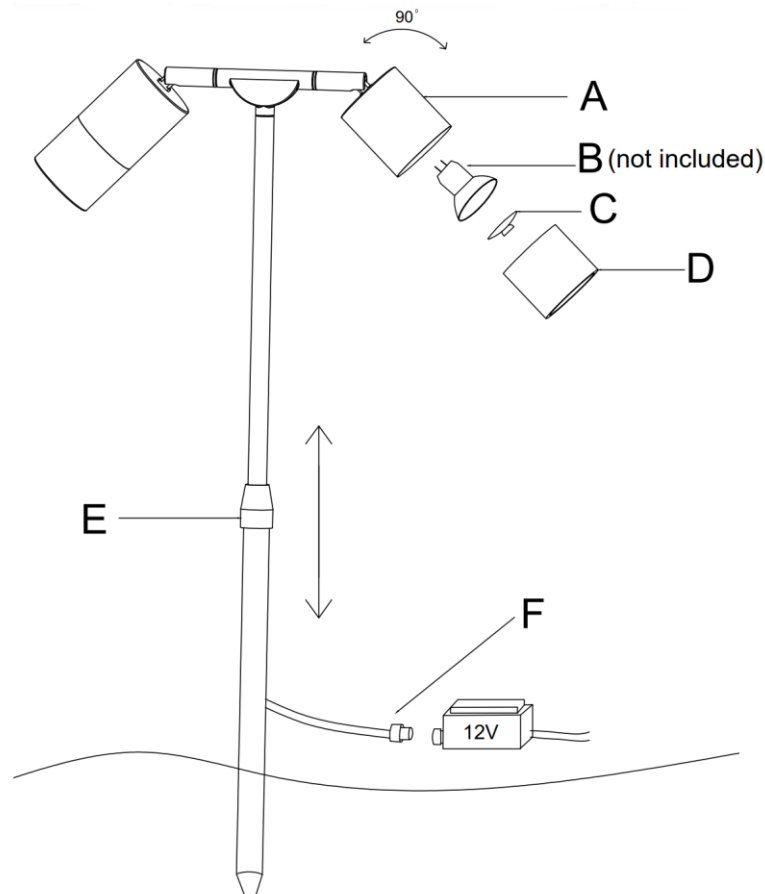

NOTE: Do not adjust the spot heads (A) more than 90°, as this may damage the joint or the internal wiring.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- The luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	220419	229402
Colour	Aged Solid Bronze	Solid Brass
Rated Voltage	12V	
Rated Wattage	20W Max. * (2x Max. 10W)	
Lamp Holder	G5.3 / MR16	
IP Rating	IP65	
Weight	2.1kg	
Dimensions	H:1350mm W:235mm L:390mm	

*** NOTE: This luminaire must be used with LED lamps only.**

