

**ROTARY DIMMER WITH INTEGRAL ON/OFF SWITCH**

SKU# 290993, 290994

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this dimmer. Please keep instructions for future reference.

**Warranty**

- This dimmer is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the dimmer is not installed by a licensed electrician, the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the dimmer.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

**Installation Requirements**

- **Must be wired and installed by a licensed electrician and in accordance to the current local and national wiring rules. AS/NZS 3000 Electrical Installations (the latest edition).**
- This Lucci Power dimmer is designed for use with LEDlux brand family dimmable LED lighting equipment. Where the loads are on the same electrical circuit, it must be Mains 240V dimmable LED retrofit luminaires which have a dimmable LED driver.  
**NOTE: A dimmable electronic transformer is not considered to be a dimmable LED Driver.**
- Problems encountered when using other types of dimmable 240V luminaires NOT recommended in this installation guideline are NOT covered by the warranty.
- Do not exceed the rated output load listed below:
  - **For Mains 240V LED load: Max. 150W**
  - **For Mains 240V Halogen / Incandescent load: Max. 300W**
  - **ELV halogen with dimmable converter/transformer: Max. 300VA**
- Not suitable for inductive load, non-dimmable load, mixed loads and ELV halogen with iron core transformers.
- Do not exceed rated power input specification.
- This product is suitable for indoor use only.

**Installation Preparation**

Before carrying out the installation the following must be considered:

- Wall plate or wall mounting box (not supplied) will be required for installation, pending on where the dimmer will be located e.g. behind a wall or surface mounted.
- Ensure the power to the electrical circuit is switched OFF.
- All electrical wiring connection & disconnection must be in accordance with Australian & New Zealand wiring rules e.g. AS/NZS 3000 (the latest edition).

**CAUTION: For your safety, this electronic dimmer must be installed by a licensed electrician.**

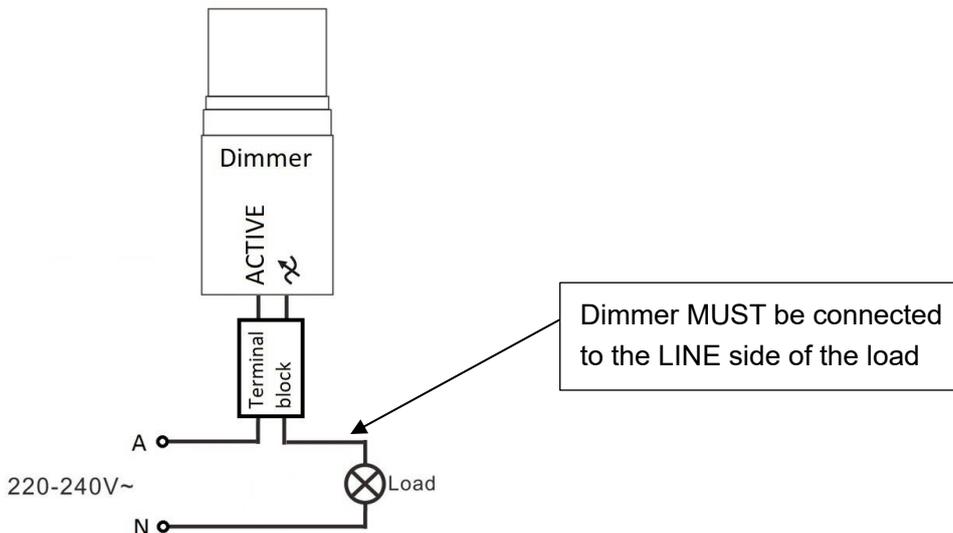
**Installation Directions**

**WARNING – HIGH VOLTAGE**

- **Power to the circuit must be switched OFF at the switchboard before the installation. Household power can cause SERIOUS INJURY or DEATH.**
- **This dimmer does not provide full disconnection/off-state. The circuit on the load side of the dimmer should be considered live.**
- **Wiring must meet all local and national electrical wiring codes.**

**MAKING THE ELECTRICAL CONNECTION**

1. Ensure power to the circuit you are working on is disconnected at the switchboard.
2. Remove the existing switch from the wall face plate.  
This dimmer fits into the following wall face plates:  
Lucci Gravity range (SKU# 299219 – 299230 and SKU# 299232 – 233243), Clipsal 2032VH & 2032WE and NPE DS603S.
3. The dimmer **MUST** be connected to the LINE side of the load. See the wiring diagram below.
4. Use the supplied terminal block and terminal box to connect the dimmer.
5. Connect the 240V~ active mains supply to the terminal block marked ACTIVE.
6. Connect the load to the terminal block marked .
7. Connect the neutral of the load to the 240V~ mains supply neutral.
8. Install the dimmer into the face plate and install the face plate back onto the wall.
9. Test all the dimmer functions to ensure it is fully operational and functioning.

**NOTE:**

- Two or more dimmer **MUST NOT** be connected in parallel or series to control the same load from two different locations.
- This dimmer shall be protected by a 6A or up to a 10A maximum miniature circuit breaker, which is special use with this dimmer.
- When setting low dimming point on product featuring colour shifting at the wall switch it recommended to use the factory setting, If you don't this may cause your lights to change colour unexpectedly.

**Operation****ON/OFF**

- Push the rotary dimmer to turn the dimmer ON or OFF.

**DIMMING**

- Turn the rotary dimmer to dim up or down.

| Dimmer Function & Settings |  |
|----------------------------|--|
| PUSH BUTTON                | FUNCTION   |
| 2                          | <b>Colour shifting function.</b> The indicator light on the dimmer does not flash during this operation.   |
| 4                          | <b>Colour temperature reset.</b> The luminaire will flash 2 times and reset to 3000K colour temperature. The brightness will be at the lowest setting and the indicator light on the dimmer will be off.   |
| 5                          | <b>Minimum brightness.</b> The indicator light on the dimmer will flash 4 times and will turn off after it has been set.   |
| 7                          | <b>Minimum dimming brightness to zero.</b> The indicator light on the dimmer will flash 4 times and will turn off after it has been set.   |
| 10                         | <b>Memory function.</b> After the isolation wall switch has been turned OFF for more than 7 seconds and turned back on, it will memorise the brightness level and colour temperature. The indicator light on the dimmer will flash 4 times and will turn off after it has been set.  |
| 15                         | <b>Reset to factory settings.</b> The indicator light on the dimmer will flash 4 times and will turn off after it has been set. The luminaire will be OFF and the maximum brightness is default at 20%.  |
| NOTES                      | <ol style="list-style-type: none"> <li>1. The default minimum brightness is set at 20%. To adjust to a lower brightness, push 7 times and adjust to your desired level and then push 5 times to set the custom minimum brightness.</li> <li>2. If the connected luminaires are different colour temperatures, push the dimmer 4 times to reset the colour temperature.</li> <li>3. If the luminaire is dimmed down to the minimum level and the luminaire start-up is inconsistent and colour temperature is inconsistent, push the dimmer 15 times to reset to the factory settings. Repeat steps 1 and 2 again.</li> </ol> |

| Product Features |  |
|------------------|--|
| 1                | Soft-start operation to extend the life of the luminaire.  |
| 2                | LED back light to indicate the dimming mode.   |
| 3                | User can set the minimum dimming level.  |
| 4                | Built-in short circuit protection, designed to ensure the dimmer can survive a wiring fault or catastrophic failure of the load. |
| 5                | Built-in re-settable thermal cut-off to protect the dimmer over normal operation temperature caused by overloads.                |

| Specifications       |  |        |
|----------------------|--|--------|
| SKU#                 | 290993   | 290994 |
| Colour               | White  | Black  |
| Rated Voltage        | 220-240V~ 50Hz   |        |
| Minimum Load         | Min. 3W  |        |
| Maximum Load         | Dimmable LED - Max. 150W<br>Halogen / Incandescent - Max. 300W<br>ELV halogen with dimmable converter/transformer - Max. 300VA |        |
| Compatible Loads     | Capacitive load, Resistive load  |        |
| Non-compatible Loads | Inductive load, Non-dimmable load, Mixed loads,<br>ELV halogen with iron core transformers                                     |        |