

CHRYSLER PENDANT ROD SET

SKU# 039208, 039210, 039211, 039212

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
- eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions


1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non scratch surface.
2. Determine the length of the suspension rod required for your installation location.
3. Install the required length of suspension rods (K, L, M, N) onto the body (P) of the luminaire.
Pull the cord (O) out as you assemble, to remove any slack.
Take care not to cross thread or twist and damage the cord (O).
4. Pull the cord (O) up into the canopy (E) and install the canopy (E) onto the top of the suspension rod (F).
5. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
6. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (G) and anchors (A).
Ensure the screws (G) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
7. Loop the figure-8 cord anchorage (I) onto the cords (O).

- 8. Hang the luminaire using the hook (H) onto the mounting bracket (B).
- 9. Connect luminaire wires and the main supply wires to the terminal block (C).

Mains Supply Wire

Earth – Yellow/Green
Neutral – Blue or Black
Live – Brown or Red

Luminaire Wire / Terminal block

Yellow/Green or 
Blue or N
Brown or L

Ensure the wires are secure and no bare wires are exposed.

- 10. Push the canopy (E) up so it is flush on the ceiling and secure it by tightening the screw on the side (J).
- 11. Install a globe (S – not included) into the lamp holder (R). Do not exceed the maximum wattage rating.
- 12. Install the outer glass shade (T – not included) onto lamp holder cover (P) and secure by tightening the 3 nuts (Q).

NOTE: Do not overtighten the nuts (Q) as this may crack and damage the glass shade.

- 13. For SKU# 039223 and 039224 glass shades (W), install the gallery (U) onto glass shade (W) and secure by tightening the 3 nuts (V).


NOTE: Do not overtighten the nuts (V) as this may crack and damage the glass shade.

- 14. Install the glass shade assembly onto lamp holder cover (P) and secure by tightening the 3 nuts (Q)

NOTE: This luminaire is only compatible with the following shades (sold separately):

SKU# 039217, 039218, 039219, 039220, 039221, 039222, 039223, 039224, 039225, 039226, 039227, 039228, 039229, 039230, 039231, 039232, 039233, 039234, 039235, and 039236.

- 15. After the installation, switch on the luminaire to test and enjoy your new lighting product.

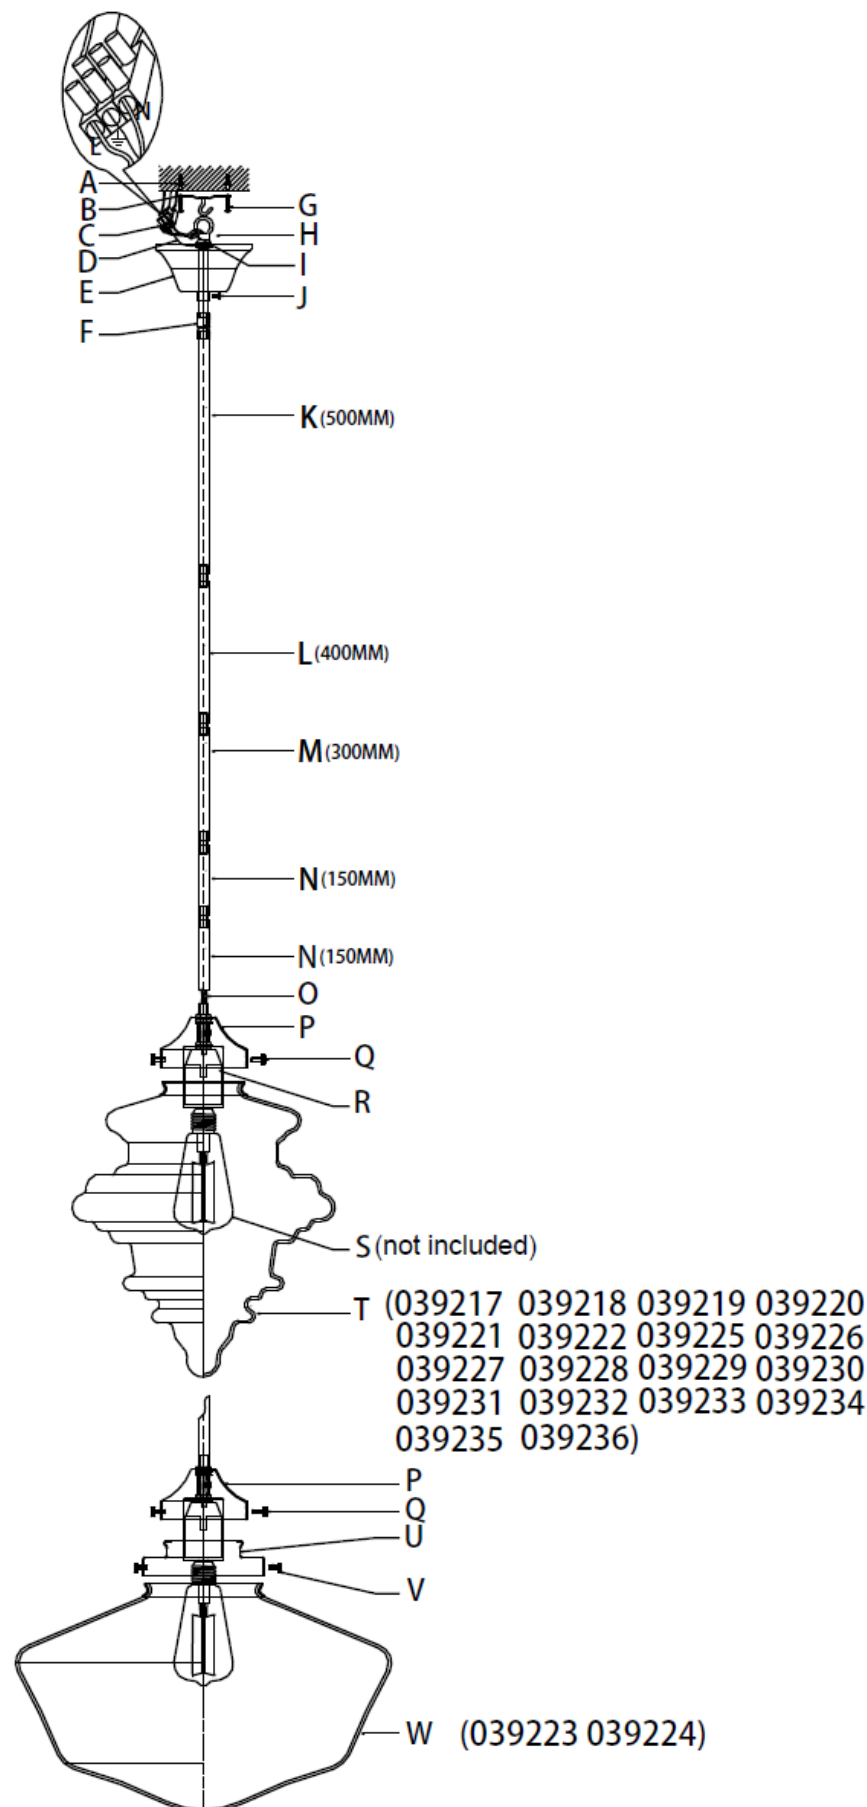

NOTE: This luminaire is only compatible with the shades (sold separately) listed in the specifications table.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications				
SKU #	039208	039210	039211	039212
Colour	Chrome	Antique Nickel	Antique Brass	Matte Black
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	45W Max.			
Lamp Holder	ES / E27			
Weight	0.7kg (without shades) 3.5kg (Max. weight with shade)			
Compatible Shades (sold separately)	SKU# 039217, 039218, 039219, 039220, 039221, 039222, 039223, 039224, 039225, 039226, 039227, 039228, 039229, 039230, 039231, 039232, 039233, 039234, 039235, 039236			
Dimensions	H:105mm Dia:120mm (without shade) Suspension:1500mm			