

PANORAMA 1 LIGHT LED PENDANT

SKU# 020701

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 3 year warranty. The warranty is from the date of purchase, not the date of installation. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- The use of non-tested dimmers may damage your LED light fitting and will void the warranty.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed next to any air vent system.
 - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.

This fitting is dimmable and has been tested at the date of publication with the dimmers listed in the specification section. The use of a LED dimmers such as the Lucci LEDlux SKU# 290998 or 290997 is highly recommended.

NOTE: For the best dimming range, use with the Lucci LEDlux SKU# 290998 dimmer and adjust the variable resistor at minimum and maximum dimming positions on the dimmer during the installation.

NOTE: Dimming may cause buzzing sounds or a slight flicker. There may be slight delays with the LED light start up or slight uneven light performance when more than one LED light fitting is linked together, switched ON or dimmed. This is not a product fault and as such is not covered under warranty.

NOTE: Some dimmers have a minimum load of 20W. Ensure the dimmer position is on the maximum setting before turning on the LED light and adjust the dimmer down to your desired light level.

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and ensure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling and drill the holes. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface.
3. Insert the fitting wire (L) through the rods (J, I, H, G, F) and canopy kit (E).
4. Tighten the rod (J) onto LED head (K), then proceed with the subsequent rods (I, H, G, F). Then tighten the canopy kit (E) onto rod (F).
5. Connect the mains supply wire to the light fitting using the terminal block (D) provided. Ensure that the wires are secure and no bare wires are exposed.


Mains Supply Wire	Fitting Wire	Wiring label
Neutral – Blue or Black	Blue	N -Neutral
Live – Brown or Red	Brown	L- Live
Earth – Yellow /Green	Yellow /Green	

6. Connect the fitting wire (L) and LED driver output wires to quick connectors (M).

Fitting Wire	Wiring label	Driver output wire
Black	Negative (-)	Black
Red	Positive (+)	Red

7. Attach the canopy kit (E) onto the mounting bracket (B) and secure it by tightening the screws (N).
8. Adjust the LED head to your preferred angle.

NOTE: When adjusting the angle of LED head, do not bend more than 60° side to side, or more than 330° when rotating, as this may damage the internal wires.

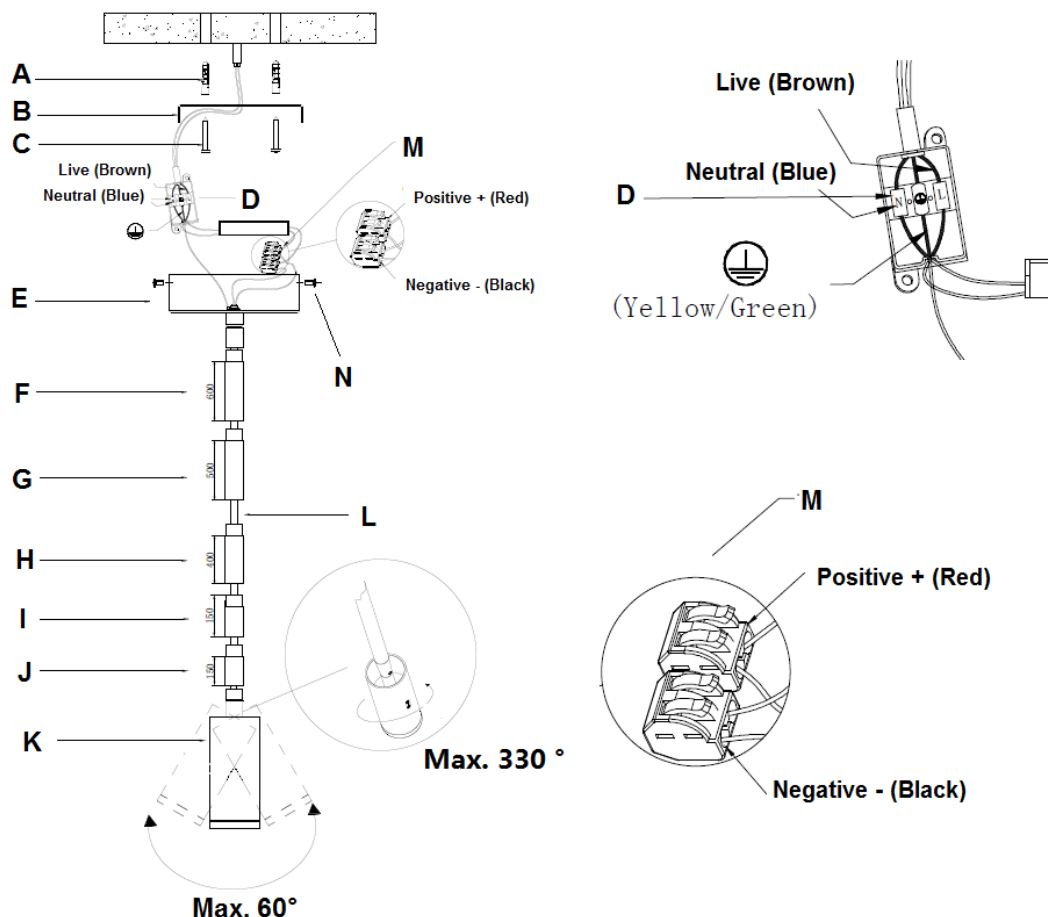

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	020701	
Colour	Black	
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	12W	
LEDs	Luminus , 3000K,600 lumens	
Weight	1.6kg	
Dimensions	L:95mm W:95mm H:130mm Max. Susp: 150mm+ 150mm+ 400mm+500mm+600mm	
Dimmer Information	Highly Recommended Dimmers	Compatible Dimmers
	Lucci LEDlux SKU# 290998 and 290997	DIGINET LED Smart MEDM; Clipsal 31E2RUDM, 32E450TM, 32E450UDM, 31E2PUDM and 32ELEDM; HPM: Cat. 400T