

LATITUDE WALL SCONCE

SKU# 239611, 239612

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- This luminaire is not suitable for use with dimmer switches. Warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP44 and must be maintained during wiring and installation of the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

- Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

FIGURE A

- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

FIGURE B

- Remove the shade from the luminaire by loosening the screws at the top and bottom.
- Use the luminaire as a template to mark the screw positions on the wall.
- Depending on the mounting surface, anchors may be required to be used. If they are required, ensure the anchors used are suitable for the mounting surface and the surrounding environment.
- Feed the mains supply cable through to the front of the luminaire.
- Install the luminaire onto the wall using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment.

NOTE: Ensure rubber washers and flat washers are used to install the luminaire to maintain the IP44 rating of the luminaire.

NOTE: A non-corrosive bead of silicone MUST be applied before installation onto the wall ensuring that no water can run down into the cabling.


NOTE: Take note of the directional label on the luminaire.

- Loosen the 4 screws from the terminal box to remove the cover and seal.
 - Loosen the screws for the cord anchorage.
 - Feed the mains supply cable into the terminal box.
 - Connect the mains supply wire to the terminal block. Ensure that the wires are secure, and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green
 Neutral – Blue or Black
 Live – Brown or Red

Luminaire Wire / Terminal block


Yellow/Green or 
 Blue or N
 Brown or L

NOTE: The luminaire is a Class I product and must be earthed during wiring and installation.

- Secure the cord anchorage by tightening the screws.
 - Install the seal and cover back onto terminal box and secure by tightening the screws.
- Install the shade back onto the luminaire.
 - Secure the shade by tightening the screws at the top and bottom.
 - Install the numbers onto the shade.

FIGURE C

- After the luminaire has been fully installed, switch on the luminaire to test and enjoy your new lighting product.

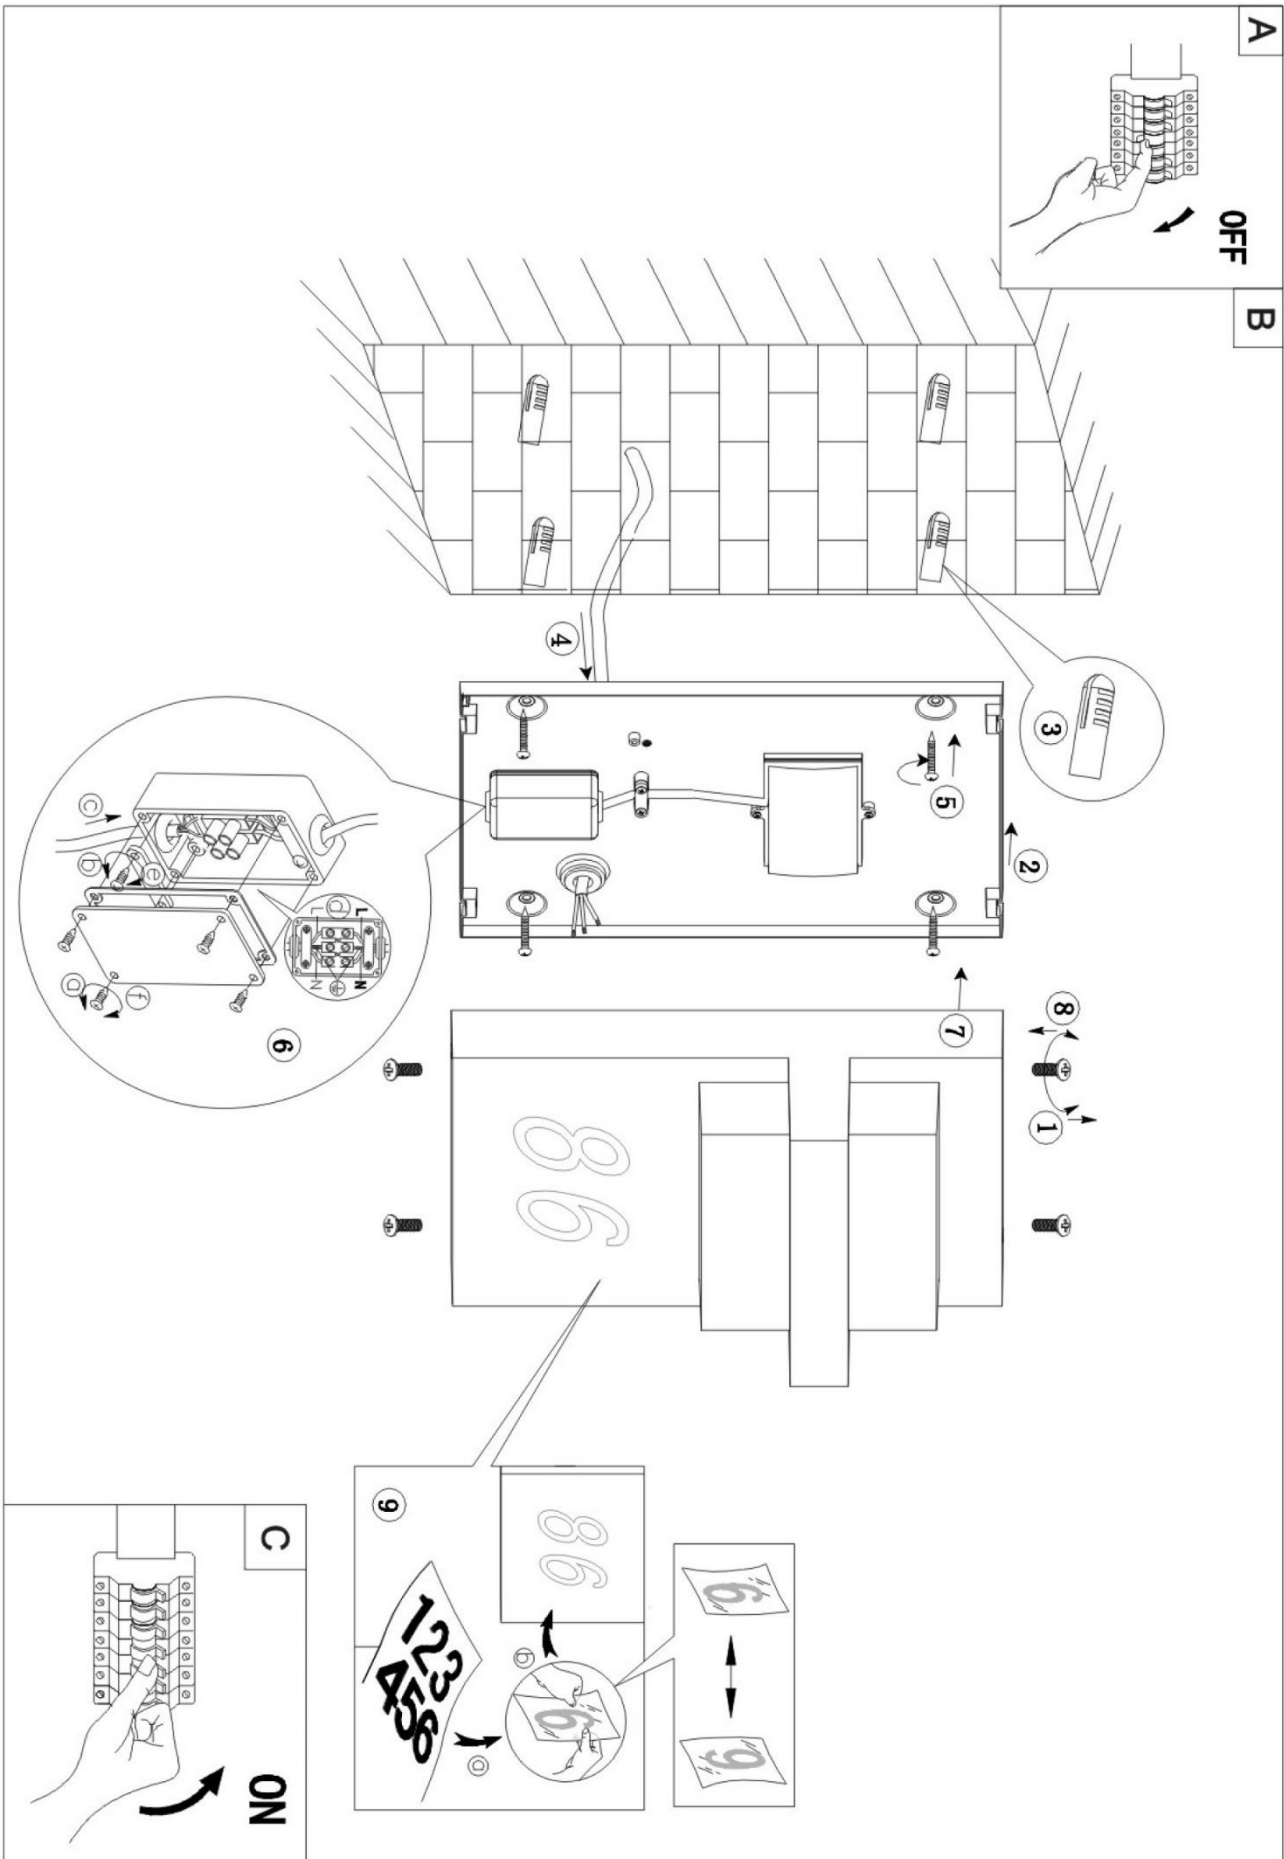

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire,
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	239611	239612
Art. No.	205064	205065
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	10W	
Rated Lumens	270 lumens	320 lumens
LED Specs	Non-dimmable, 3000K Warm-White, CRI>80	
IP Rating	IP44	
Weight	0.7kg	
Luminaire Dimensions	H:270mm W:190mm E:80mm	