

Installation Instructions
SKU# 240290, 240291
(LD-AR0134/BK, LD-AR0134/SL)
Rated Voltage 220-240V~ 50Hz

THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT, TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT.

WARRANTY:

- This light fitting is covered by a 3 year warranty; please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

INSTALLATION REQUIREMENTS:

- **Must be installed by a Licensed Electrician.**
- **All wiring must adhere to local and national wiring codes. eg. AS/NZS 3000 latest edition.**
- **This fitting is rated IP44, this must be maintained during installation.**
- **The mounting point must be able to support 2 times the weight of the fitting.**
- **The fitting must not be mounted on a surface which can be subject to vibrations.**
- **The ideal mounting height for the fitting is between 1.8m to 2.5m above the ground.**
- **Take care not to pull any electrical wires during unpacking as this may damage the connection.**
- **Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.**
- **Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.**
- **Ensure all power to the circuit you are working on has been switched OFF.**
- **Select a suitable location for installation. This fitting is protected against water penetration to IP44 standards, which is splashing in every direction. Take note of the directional label on the fitting before installation.**

INSTALLATION DIRECTIONS:


1. Remove the mounting bracket from the back of the fitting by loosening the screws on the top and bottom.
2. Use the mounting bracket as a template to mark the screw positions onto the wall.
Drill holes into the wall and push the plastic anchors into the holes.
Install the mounting bracket onto the wall by using the mounting screws and rubber washers provided.
Ensure the screws used are suitable for the mounting surface.
Loosen the screws on the cord anchorage system and insert the main supply wire through the cord anchorage leading to terminal block.

3. Connect the mains supply wire to the terminal block provided.
Ensure that the wires are secure and no bare wires are exposed.

Mains Supply Wire	Fitting Wire
Neutral – Blue or Black	Blue
Live – Brown or Red	Brown

Place the mains supply wire in the cord anchorage system and secure by tightening the screws.

4. Install the fitting back onto the mounting bracket and tighten the two screws on the top and bottom.
5. Adjust the heads of the fitting to the desired direction.

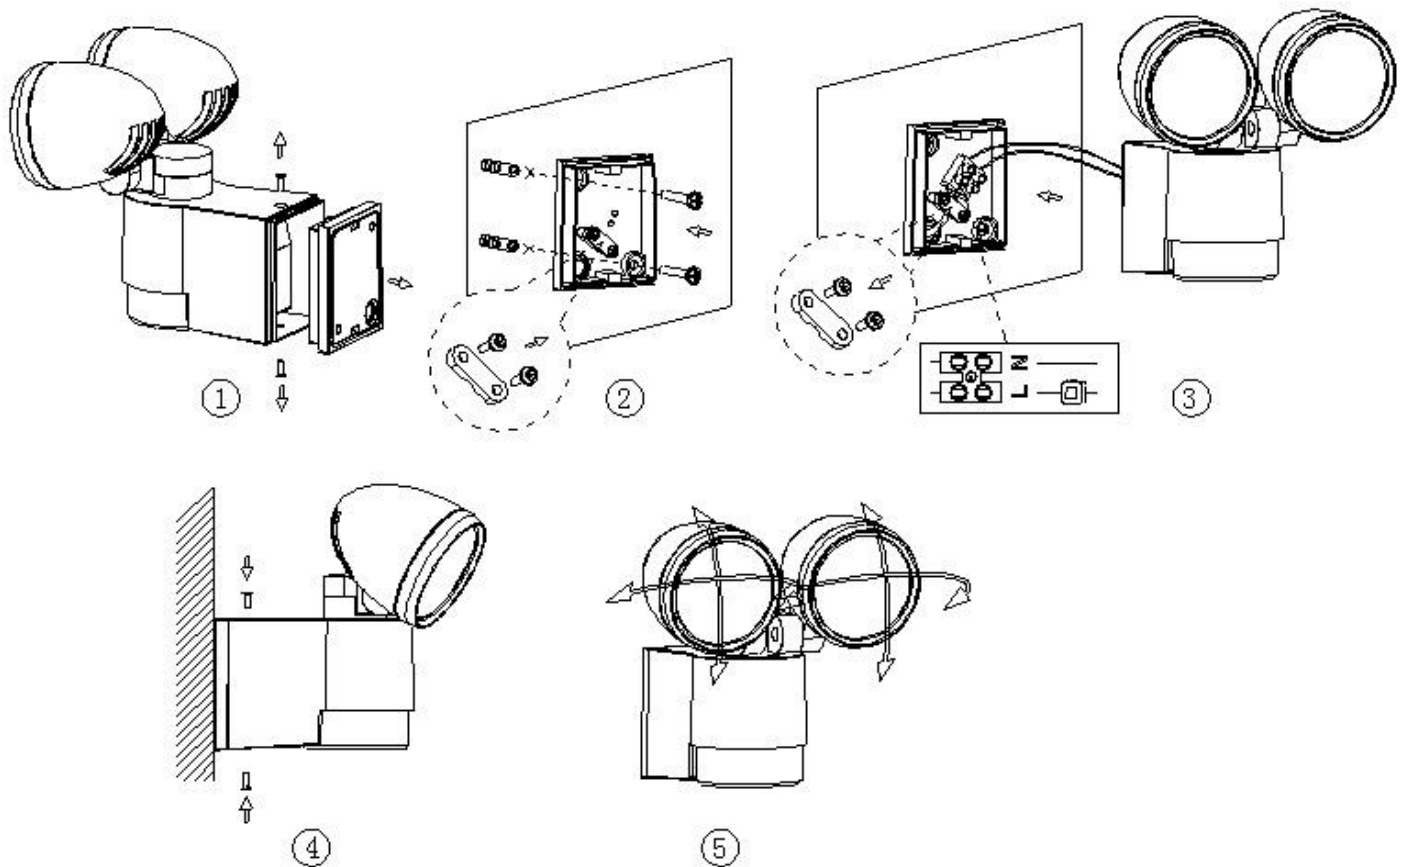

SAFETY TIPS:

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance or adjustment to the fitting.
2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
3. Find a suitable location away from liquids and hazards.
4. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
5. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

SPECIFICATIONS:

SKU #	240290	240291
MODEL #	LD-AR0134/BK	LD-AR0134/SL
RATED VOLTAGE	220-240V~ 50Hz	
RATED WATTAGE	Total 6W (12x0.5W)	
LED	SAMSUNG LEDs, 4000K	
WEIGHT	0.5 kg	
DIMENSIONS	200mm x 175mm x 145mm (W x E x H)	
IP RATING	IP44	