

VINCI 12 LIGHT PENDANT / CLOSE-TO-CEILING FITTING

SKU# 050670, 050671

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling.
- If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

- Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
- Select the type of installation you require before assembly and installation:
 - This luminaire can be installed as a Pendant or Close-to-Ceiling fitting.
 - Refer to the corresponding instructions and diagram for the different installation methods.

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.

PENDANT INSTALLATION INSTRUCTIONS (Refer to the diagram on Page 3)

1. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
2. Install the rod (N) onto the coupler of luminaire and secure by tightening the grub screw (O) with the Allen key (P) provided.
3. Determine the suspension length required for your installation location. The chain suspension (M) length can be adjusted by using the chain link connectors (L). Loosen the cord anchorage (H) and adjust the length of the suspension cord (G). Ensure the rest of the suspension cord (G) are tightened & well placed inside the canopy (J). Tighten the cord anchorage (H), take care not to overtighten and damage the cord. After adjusting the chain suspension (M) length, check and ensure that NO load/weight is placed onto the cord (G). The full load/weight of the pendant must always be on the chain suspension (M).
4. Loosen the screw (E) at the end of the safety lanyard (F), insert and loop the safety lanyard into one of the holes on mounting bracket (B).
5. Tighten the screw (E) at the end of the safety lanyard (F) and ensure it is attached securely.
6. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
7. Connect the mains supply wire to the terminal block (I). Ensure the wires are secure and no bare wires are exposed.


Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

Please ensure the earth wire (D) from the mounting bracket (B) is connected to the terminal block (I).

8. Install the canopy (J) onto the mounting bracket (B) by securing the nuts (K) on the bottom.


NOTE: Check and ensure the chain suspension (M) is not squashing or rubbing against the cord (G).

NOTE: Ensure the load/weight of the pendant is on the chain suspension (M) and not the cord (G) by checking the chain suspension (M) is in tension and not the cord (G).

NOTE: The load/weight of the pendant MUST always be on the chain suspension (M) and NEVER on the cord (G).

9. Install globes (S – not included) into the lamp holders. Do not exceed the maximum wattage rating.
10. Install the 6 pcs alabaster shades (R – 6 pieces) onto the bottom frames of the luminaire first, and secure by tightening the screw nuts (T) and washer (U).
11. Install the other alabaster shades (R – 38 pieces) onto the other frames (Q) of the luminaire.
12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

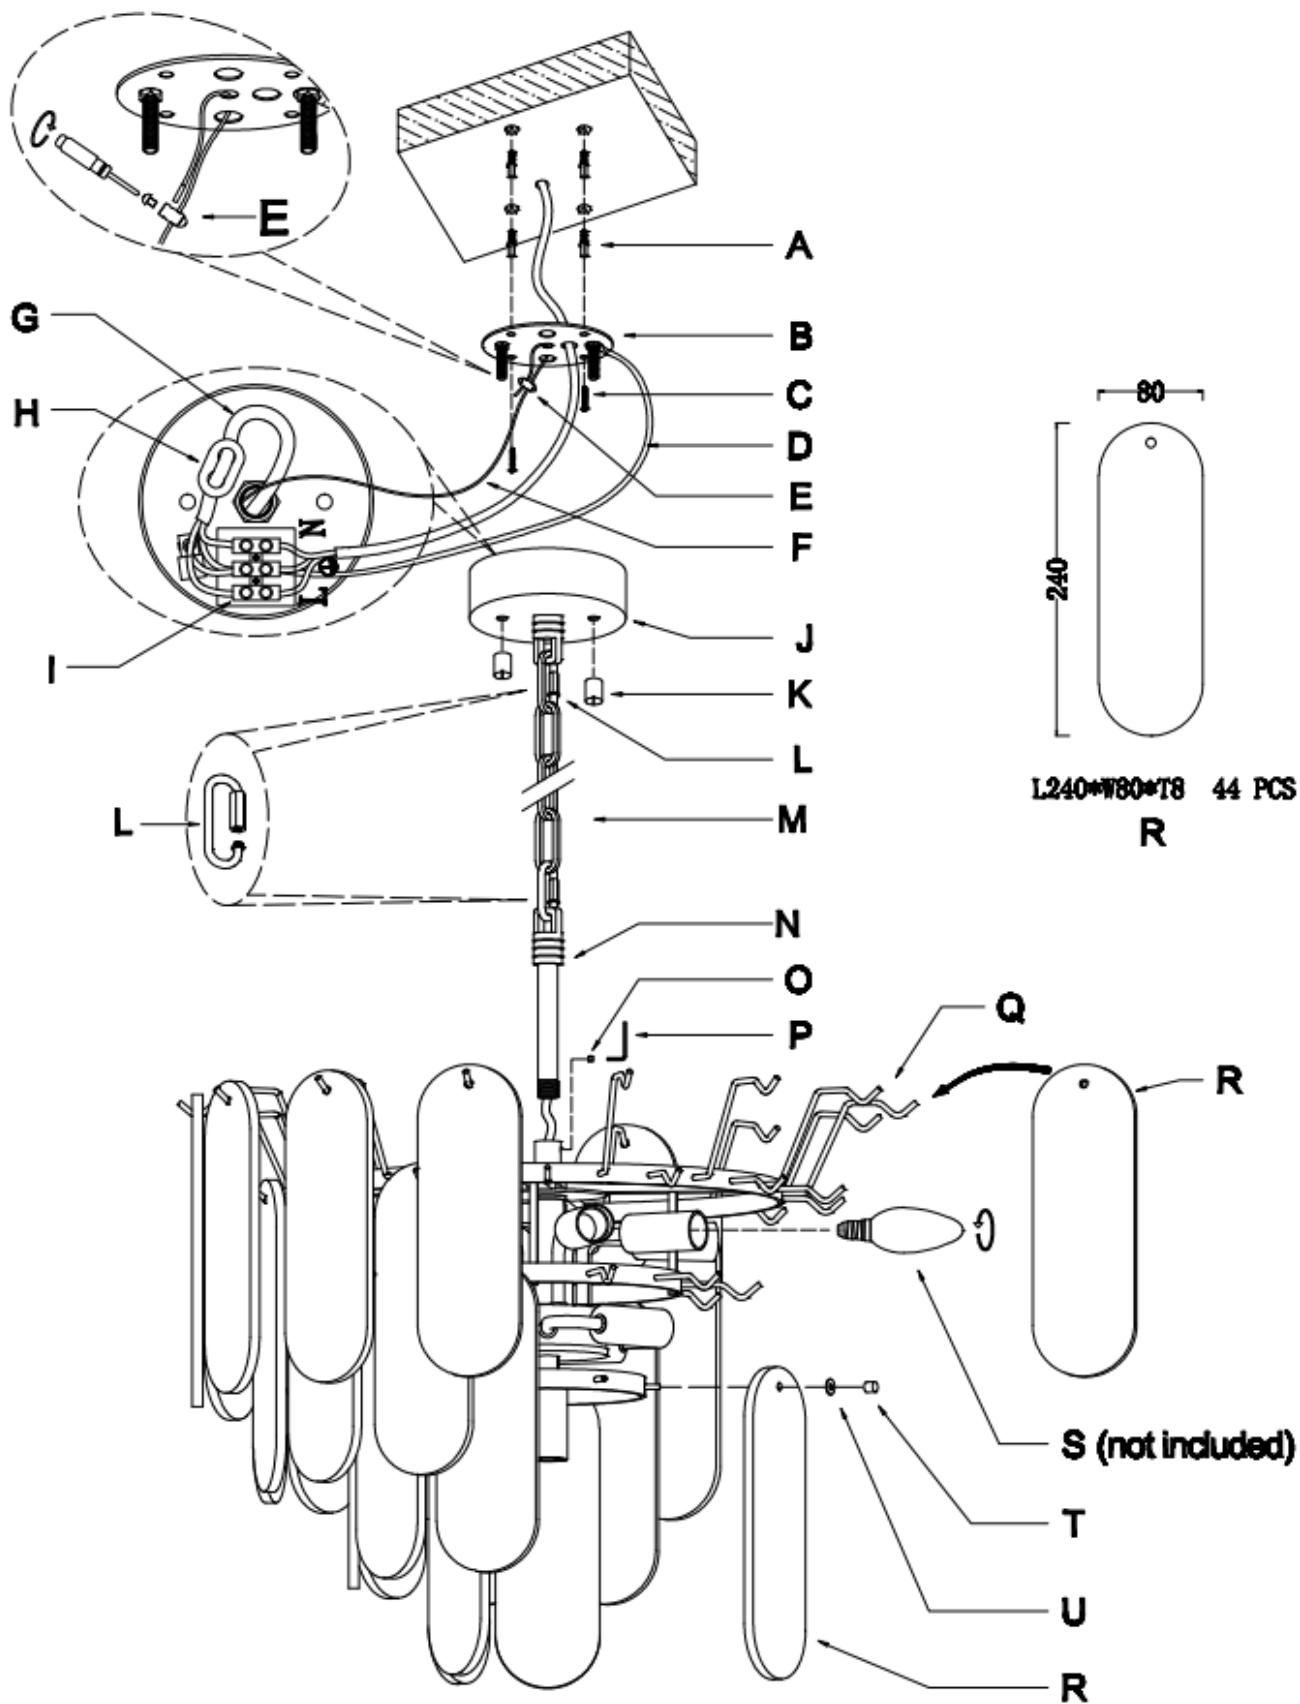

CLOSE TO CEILING INSTALLATION INSTRUCTIONS (Refer to the diagram on page 5)

1. Remove all components relating to the chain suspension from the luminaire.
2. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
3. Loosen the screw (E) at the end of the safety lanyard (F), insert and loop the safety lanyard into one of the holes on mounting bracket (B).
4. Tighten the screw (E) at the end of the safety lanyard (F) and ensure it is attached securely.
5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
6. Insert the luminaire cord (G) through the rod (O) and the hole of the canopy (M). Insert the rod (O) onto the coupler of luminaire and secure by tightening the grub screw (P) with the Allen key (Q) provided. Insert the rod (O) into the canopy (M). Secure the canopy (O) onto the luminaire rod (O) by installing the star washer (L), lock washer (K) and nut (J) over the luminaire cord (G).

NOTE: Ensure the star washer (L), lock washer (K) and nut (J) are installed in the correct sequence

7. Loosen the cord anchorage (H) and adjust the length of the suspension cord (G). Ensure the rest of the suspension wires are tightened & well placed inside the canopy (M). Tighten the cord anchorage (H), take care not to overtighten and damage the cord (G).
8. Connect the mains supply wire to the terminal block (I). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N


Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

Please make the earth wire (D) from the mounting bracket (B) is connected to the terminal block(I).

9. Install the canopy (M) onto the mounting bracket (B) by securing the nuts (N) on the bottom.
10. Install the globes (T– not included) into the lamp holders. Do not exceed the maximum wattage rating.
11. Install the 6 pcs alabaster shades (S – 6 pieces) onto the bottom frames of the luminaire first, and secure by tightening the screw nuts (U) and washer (V).
12. Install the other alabaster shades (S – 38 pieces) onto the other frames (R) of the luminaire.
13. After the installation, switch on the luminaire to test and enjoy your new lighting product.

CLOSE TO CEILING INSTALLATION DIAGRAM (Refer to the installation steps on Page 4)

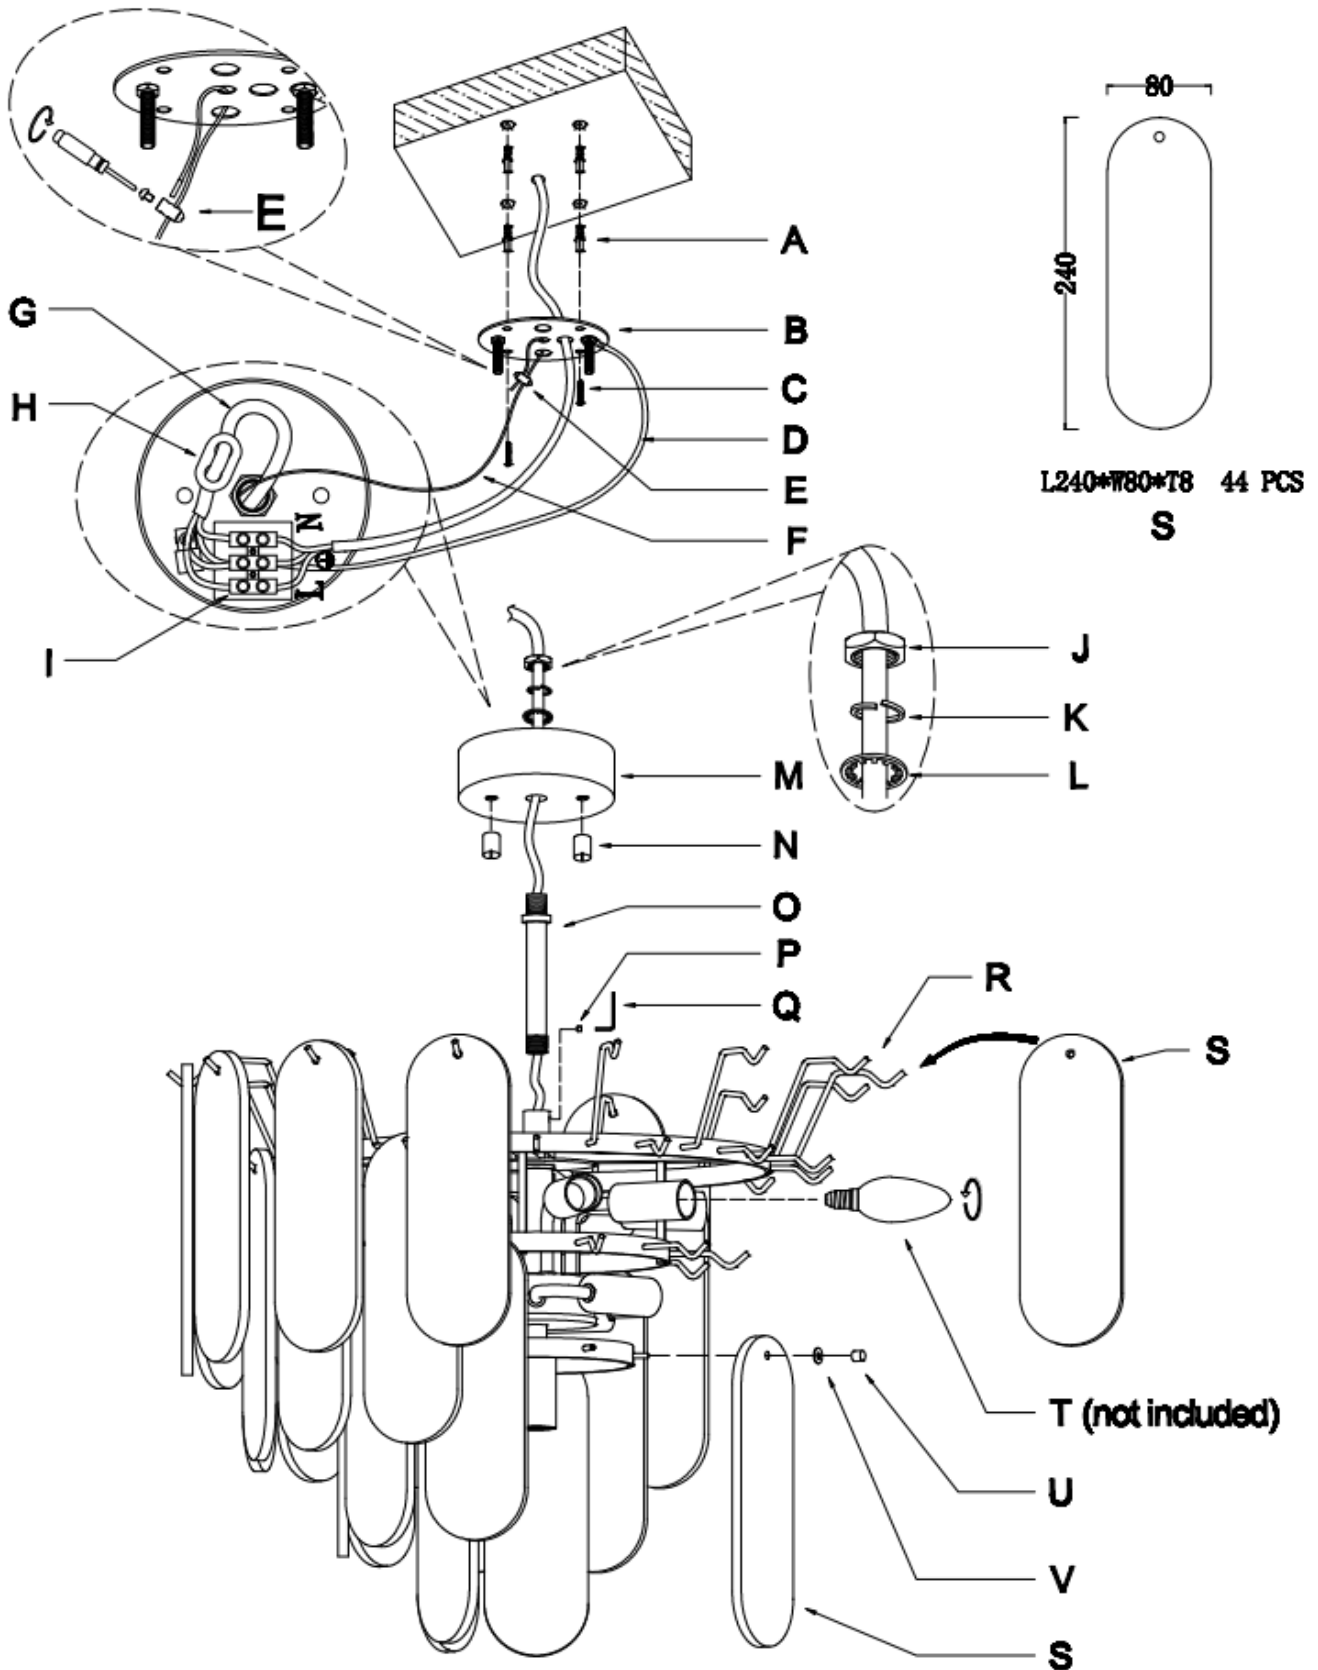

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	050670	050671
Colour	Aged Brass with Spanish Alabaster	Bronze with Spanish Hazel Alabaster
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	336W Max. (12 x 28W Max.)	
Lamp Holder	SES / E14	
Weight	18kg	
Canopy Dimensions	H:40mm Dia:120mm	
Pendent Luminaire Dimensions	H:540mm Dia:570mm Susp:2000mm MAX	
CTC Luminaire Dimensions	H:540mm Dia:570mm	