

PRESTON 1 LIGHT IP44 PENDANT

SKU# 011913. 011914. 011915

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be maintained during wiring and installation.
- This luminaire is rated IP44 and must be maintained during wiring and installation.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.

NOTE: To maintain the IP44 rating for this pendant, ensure the correct globe is used as outlined in the 'Recommended Globes' section of the specifications table on Page 4.

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
2. Decide on the suspension length of your pendant by installing the different sections of suspension rods (G, H, I, J) onto the lamp holder (K).

NOTE: Take care not to twist and damage the luminaire cord during assembly. Pull the cord through suspension rods (G, H, I, J) as you assemble and relieve any twist in the cord by turning it anticlockwise.

3. Remove the mounting plate (B) from the canopy (D) by loosening the grub screws on the side using the supplied allen key (F).
4. Pull the luminaire cord up into the canopy (D) and attach the canopy (D) to the top of the suspension rod(s).
5. Use the mounting plate (B) as a template to mark the screw positions on the ceiling.
6. Install the mounting plate (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
7. Connect the mains supply wire and luminaire wires together to the terminal block (E). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire/ Terminal Block

Yellow/Green or 

Blue or N


Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

8. Install the canopy (D) onto the mounting plate (B) and secure by tightening the grub screws on the side using the supplied allen key (F).
9. Install the lamp (L – not included) onto the lamp holder (K). Do not exceed the maximum wattage rating.

NOTE: To maintain the IP44 rating for this pendant, ensure the correct globe is used as outlined in the 'Recommended Globes' section of the specifications table on Page 4.

11. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

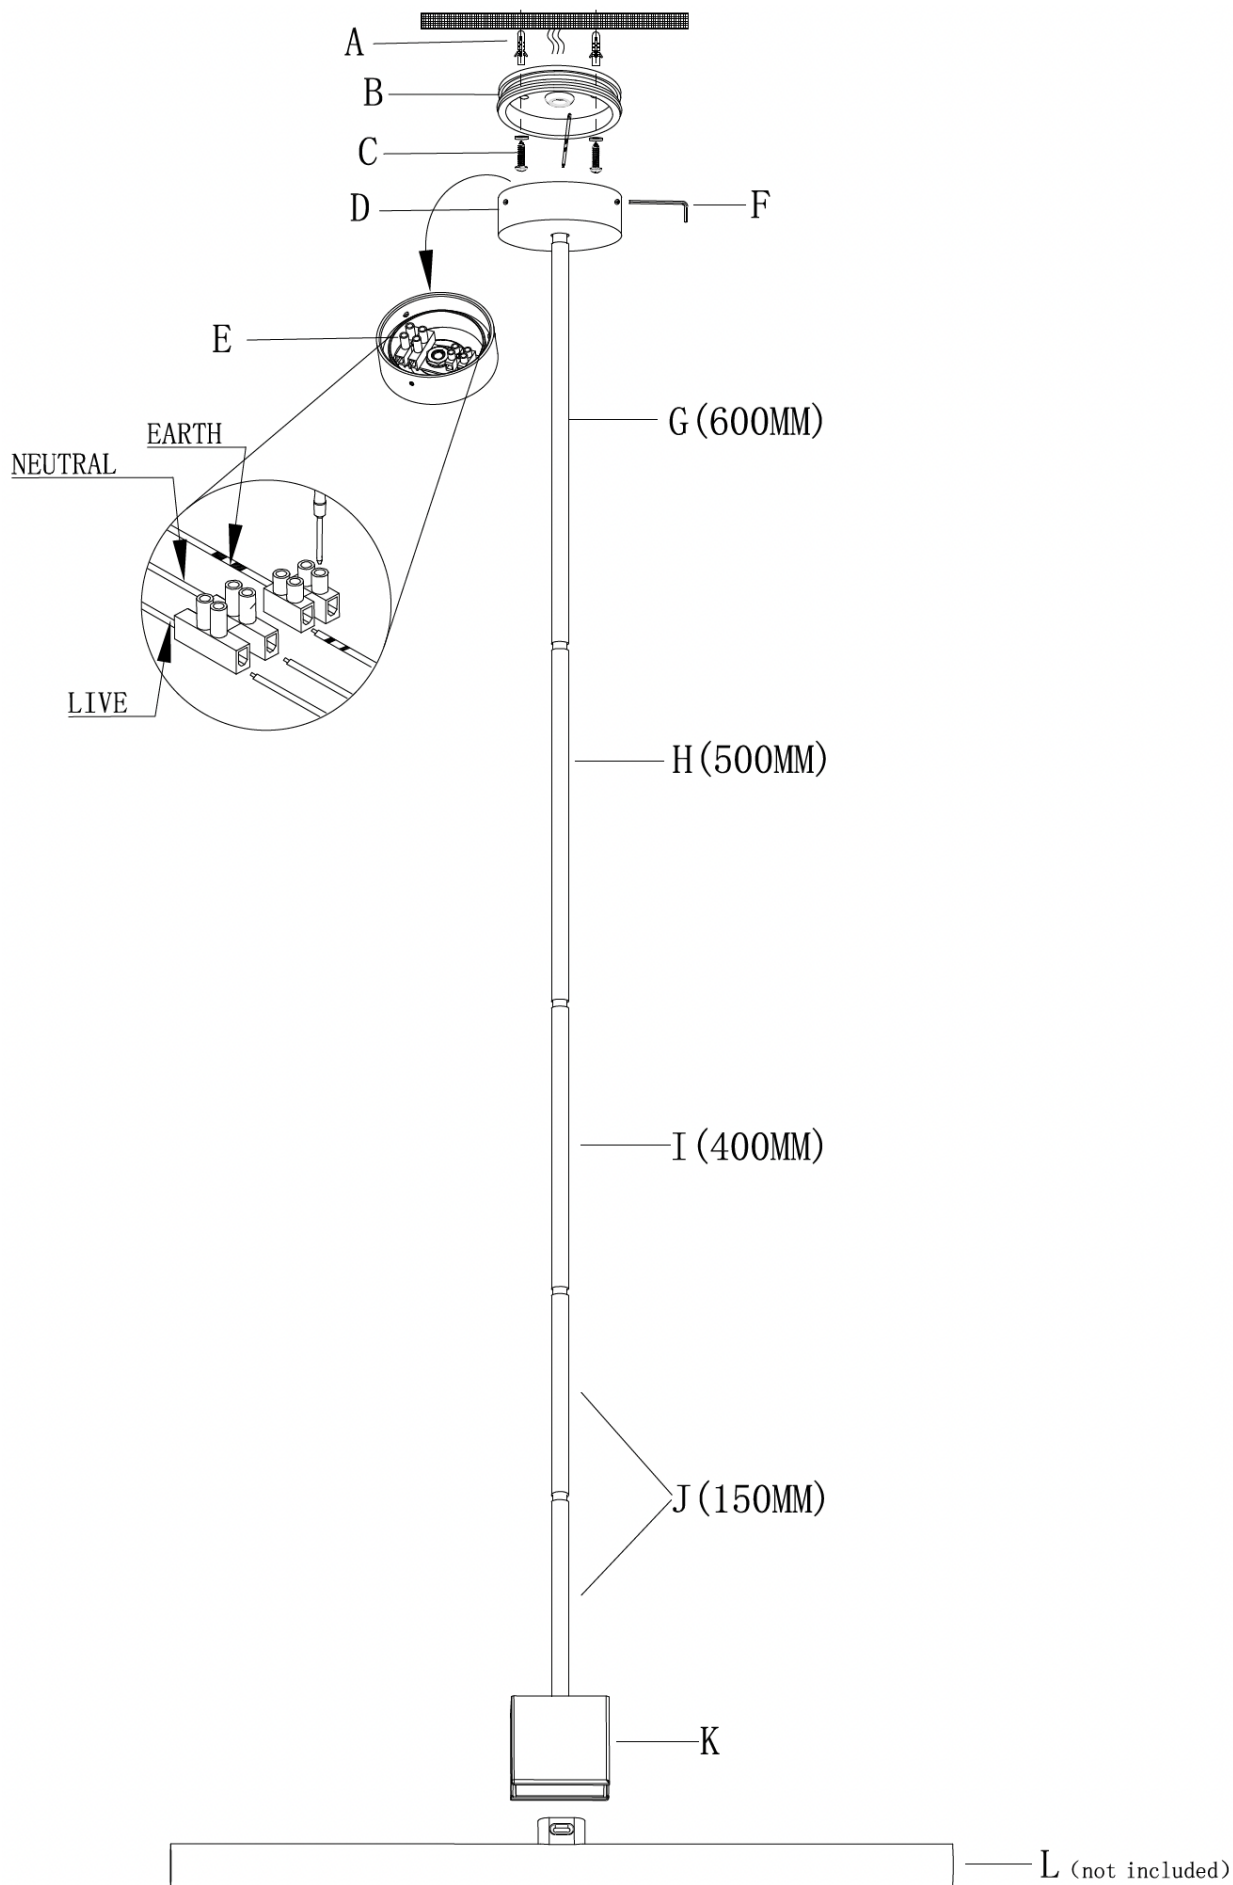

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	011913	011914	011915
Colour	Textured Black	Aged Brass Finish	Bronze Finish
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	20W Max.		
Protection Class	Class I		
Lamp Holder	S14d		
Recommended Globes	SKU# 121740 LUCCI 500mm LED 4.8W S14d WW Clear Glass SKU# 121741 LUCCI 500mm LED 4.8W S14d WW Ribbed Clear Glass SKU# 121742 LUCCI 500mm LED 4.8W S14d WW Sepia Glass or alternately any other S14d linear tubular lamp with a 28-30mm diameter.		
IP Rating	IP44*		
Weight	0.75kg		
Canopy Dimensions	Dia: 85mm H: 28mm		
Luminaire Dimensions	L: 63mm W: 38mm H: 58mm Susp:1800mm		

***NOTE: To maintain the IP44 rating for this pendant, ensure the correct globe is used as outlined in the 'Recommended Globes' section of the specifications table above.**