

MILLER 6 LIGHT G9/GX53 PENDANT

SKU# 018112, 018113

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed in the direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Due to the size/weight/wiring of the luminaire, two people will be required to lift it during the installation process.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Decide on the suspension length of your pendant by installing the different sections of suspension rods (H,I,J,K) onto the body(M) of your luminaire. Feed the cord(L) through as you assemble to remove any slack. Take care not to cross thread or twist and damage the cord (L).
3. Pull the cord(L) up into the canopy(G) and attach the canopy(G) to the top of the suspension rod.
4. Install the “figure 8” shape cord anchorage(F) onto the cord(L) inside the canopy. Ensure to leave enough room for connection to the terminal block (E).
5. Remove the mounting bracket (B) from the canopy (G) by loosening the screws (C) on the sides.
6. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
7. Install the mounting bracket(B) onto the ceiling by using appropriately sized mounting screws(D) and anchors(A). Ensure the screws(D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
8. Connect the mains supply wire to the terminal block (E).

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

NOTE: The luminaire is a Class I product and must be earthed during wiring and installation.

9. Ensure that the wires are secure, and no bare wires are exposed.
10. Install the canopy (G) onto the mounting bracket (B) and secure it by tightening the screws (C) on the sides.
11. Install GX53 lamps (N – not included) into the lamp holder (O) of light fixture. Do not exceed the maximum wattage rating.

NOTE: Compatible with GX53 lamps of 152mm or smaller.

SKU# 121354 or 121359 GX53 lamps are recommended.


12. Install G9 LED globes (R – Not included) into the lamp holders (Q). Do not exceed the maximum wattage rating.
13. Install the glass shades (S) onto the body (P) of luminaire and ensure they are secure.
14. Adjust the luminaire arms to you desired angle.

NOTE: Do not adjust the arms more than 330°, as this may damage the joint or the internal wiring.

15. Adjust the luminaire heads to you desired angle.

NOTE: Do not adjust the heads more than 180°, as this may damage the joint or the internal wiring.

16. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new lighting product.

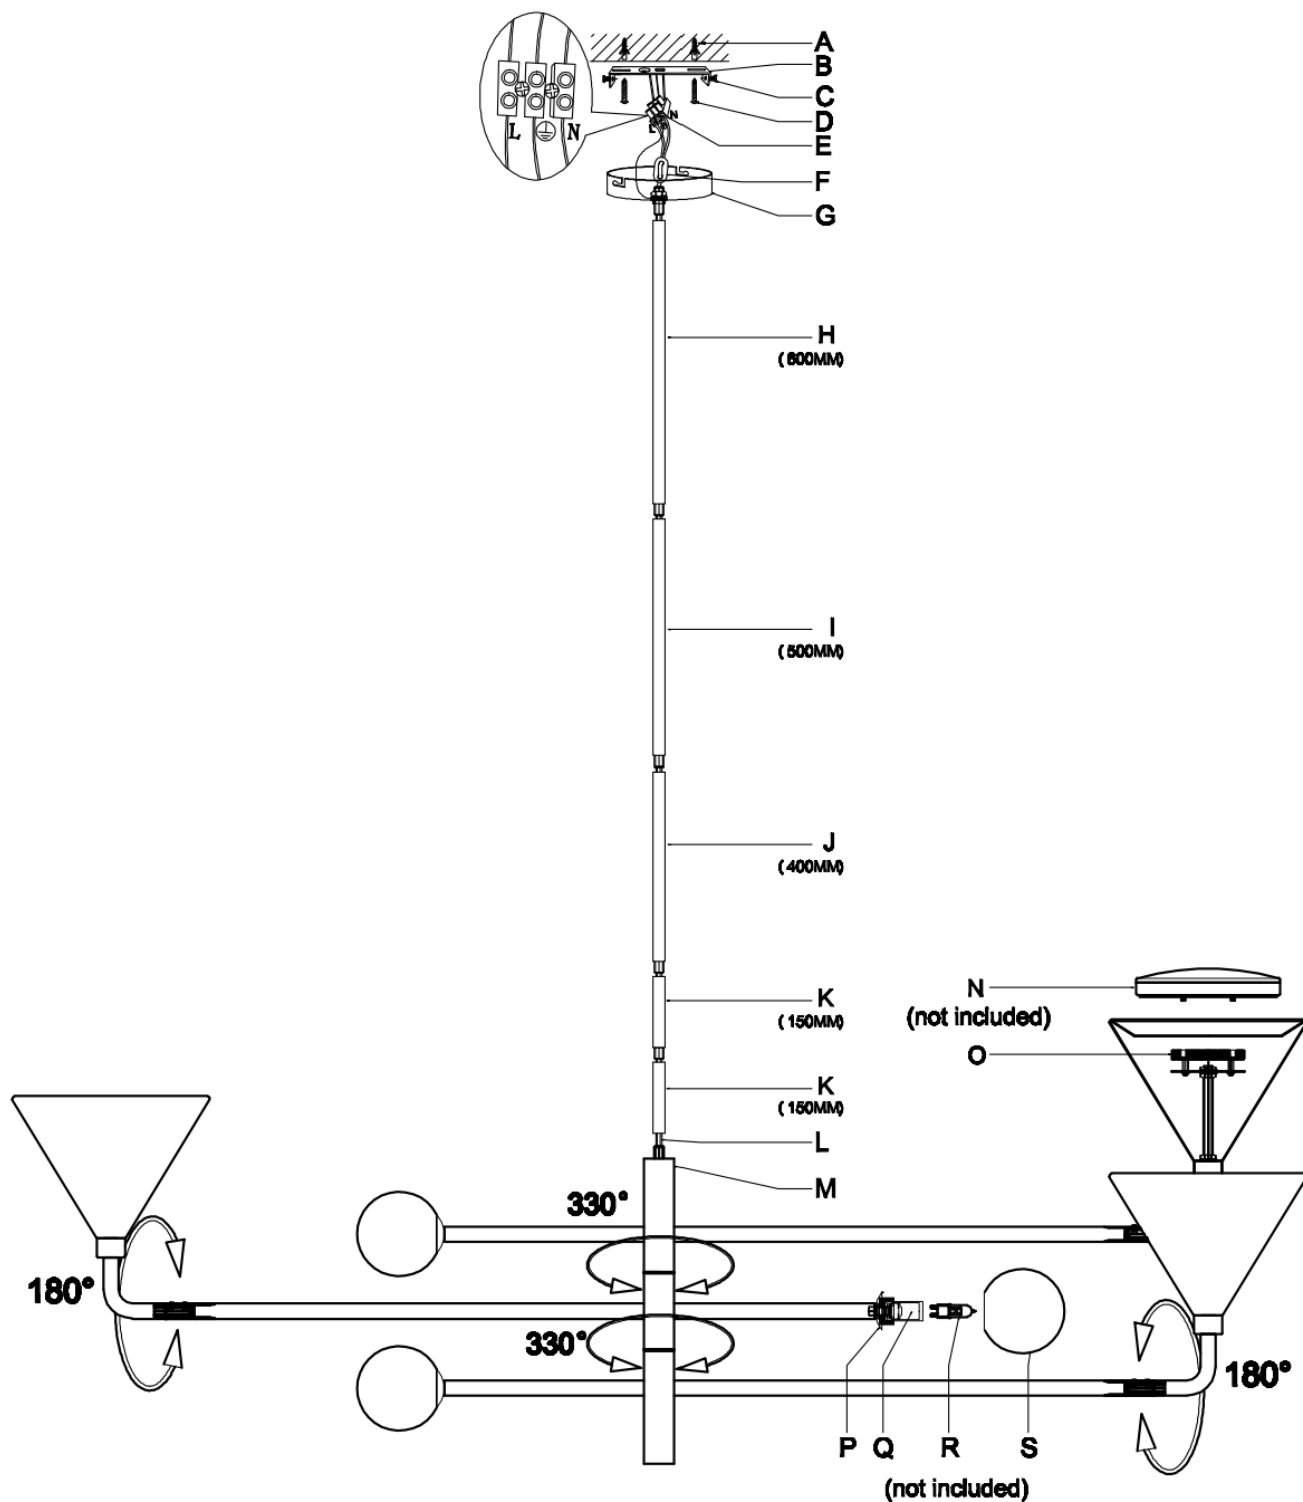

NOTE: Do not adjust the heads more than 180°, as this may damage the joint or the internal wiring.

NOTE: Do not adjust the arms more than 330°, as this may damage the joint or the internal wiring.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamps or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	018112	018113
Colour	BRONZE	AGED BRASS
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	51W Max. (3x Max.12W GX53 and 3x Max.5W G9 - LED lamps only)	
Lamp Holder	GX53* & G9	
Weight	4.8kg	
Canopy Dimensions	H:25mm Dia:110mm	
Luminaire Dimensions	H:645mm D:1380mm Susp:1800mm Max.	

NOTE: Compatible with GX53 lamps of 152mm or smaller.
SKU# 121354 or 121359 GX53 lamps are recommended.