

## TRAVIATO 1 LIGHT SQUAT PENDANT

SKU# 018166, 018191

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
E.g., AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling.  
If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Use an Allen key (G, included) to loosen the chord anchorage grub screw (H) on the nut (F).
3. Loosen the nut (F) from the canopy (E) and mounting bracket (C) by twisting it anti-clockwise and slide the canopy (E) down the suspension cord (I).
4. Use the mounting bracket (C) as a template to mark the screw positions on the ceiling.
5. Determine the suspension length required for your installation by pulling excess length of the suspension cord (I) through the mounting bracket (C) and securing with the cord anchorage (L).
6. Install the mounting bracket (C) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A).  
Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.

- Connect the mains supply wire to the terminal block (B).

## Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

## Luminaire Wire / Terminal block

Yellow/Green or 


Blue or N

Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

Ensure the wires are secure, and no bare wires are exposed.

- Install the canopy (E) back onto the mounting bracket (C) and secure by tightening the nut (F) on the bottom.
- Tighten the cord anchorage grub screw (H) by Allen key (G, included). Take care not to overtighten and damage the suspension cord.
- The height of the lamp holder (N) can be adjusted depending on the GU10 globe used. Loosen the cord anchorage grub screw (M) on the nut (K) by Allen key (G, included) and adjust the cord length inside the shade (J). Tighten the cord anchorage grub screw (M) to secure the nut (K) again.
- Install a globe (O - not included) into the lamp holder (N). Do not exceed the maximum wattage rating.  
Only LED globe is used.
- Install the shade cover (P) onto the shade (J) by the U-shape tool (Q).
- After the installation, switch on the luminaire to test and enjoy your new lighting product.

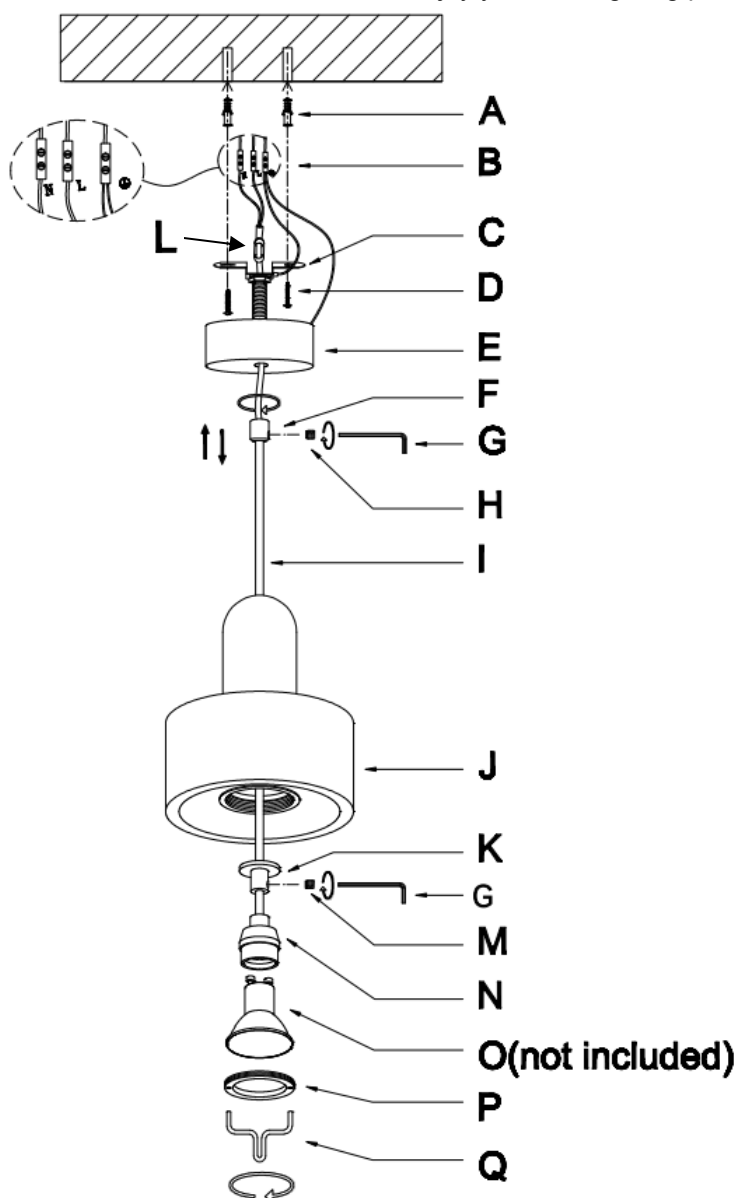

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	018166	018191
Colour	BRONE FINISH / TRAVERTINE	BLACK / LAVA STONE
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	10W Max. (LED globe only)	
Lamp Holder	GU10	
Weight	2.9kg	
Canopy Dimensions	H:30mm    Dia:80mm	
Luminaire Dimensions	H:170mm    Dia:142mm    Susp:2000mm	