

CHRYSLER WALL BRACKET

SKU# 039268, 039269, 039270, 039271

Rated Voltage 220-240V~ 50Hz

NOTE: The Chrysler glass shade is sold separately.

This wall bracket is rated IP44 only after a compatible Chrysler glass shade has been fully installed.

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP44 only after a compatible Chrysler glass shade (sold separately) has been fully installed. The IP44 rating must be maintained during wiring and installation.
- Replace any cracked protective lamp shade to maintain IP rating when using this luminaire.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.
 - The mounting point must support 2 times the weight of the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the luminaire (D) by loosening the nuts and washer (E & F) from the front.
3. Use the mounting bracket (B) as a template to mark the screw positions on the wall.
4. Install the mounting bracket (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A).
Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment. Check the screws (G) are positioned in the mounting bracket (B) before installation.

NOTE: Ensure the plastic washers (H) are used to install the mounting bracket to maintain the IP rating.

NOTE: A non-corrosive bead of silicone MUST be applied before installation onto the wall ensuring that no water can run down into the cabling.


Installation Instructions

5. Connect the mains supply wire to the terminal block (I). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

- Earth – Yellow/Green
- Neutral – Blue
- Live – Brown

Luminaire Wire / Terminal Block

- Yellow/Green or 
- Blue or N
- Brown or L

6. Install the luminaire (D) back onto the mounting bracket (B), take care not to squash any of the internal wiring. Install the plastic washers (E) onto the screws (G) and secure by tightening with the nuts (F).

7. Ensure the glass shade grommet (L) is positioned around the lamp holder (M) and inside the lamp cup (J).


8. Install a globe (N - not included) into the lamp holder (M). Do not exceed the maximum wattage rating.

9. Install a compatible Chrysler glass shade (O – sold separately) onto the luminaire and secure by tightening the screws (K).

NOTE: Ensure the grommet (L) forms a tight seal around the rim of the glass shade (O).

NOTE: Take care not to overtighten the screws (K) as it may crack the glass shade (O).

10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

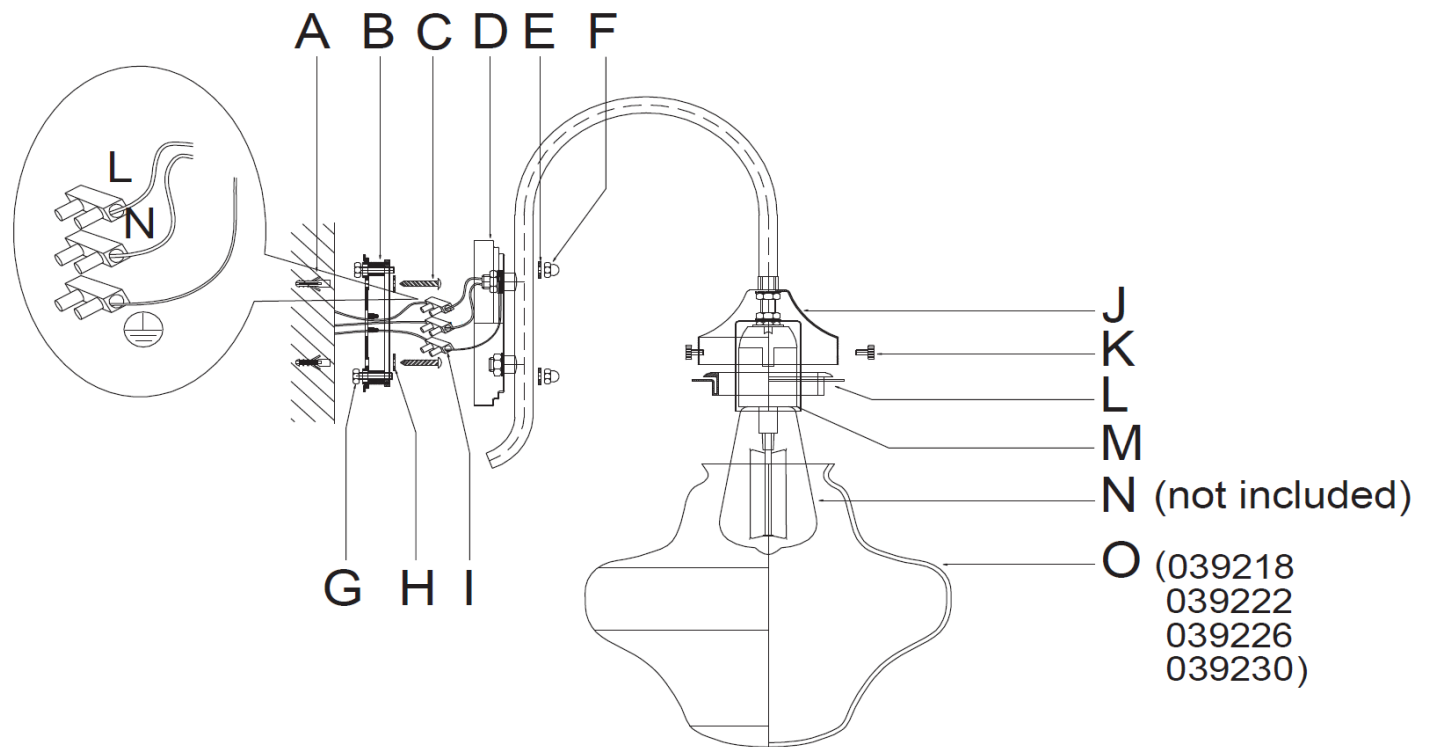

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications				
SKU#	039268	039269	039270	039271
Colour	Antique Nickel	304 S/S in Black	Antique Brass	316 Stainless Steel
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	45W Max.			
Lamp Holder	ES / E27			
Weight	0.5kg			
IP Rating	IP44* *Only after a compatible Chrysler glass shade (sold separately) has been fully installed			
Dimensions	H:265mm E:250mm W:120mm			