

BELLINI 9 LIGHT PENDANT

SKU# 039378, 039379

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.

NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Expand the lamp arms around the body of the fitting, ensuring they are evenly spaced around the centre. (Fig. 1) The lower arms are then fixed in place with the fixing plate (P), which is secured using the decorative nut (Q)

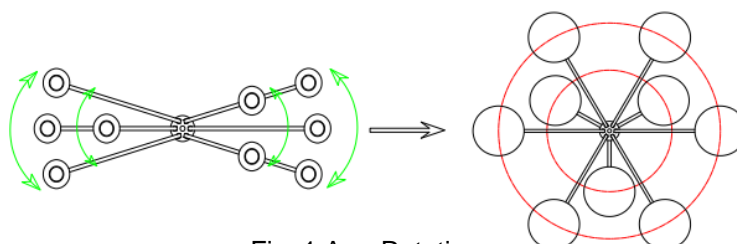




Fig. 1 Arm Rotation

3. Remove the mounting bracket (B) from the canopy (F) by loosening the screws (E) on the sides.
 4. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
 5. Determine the suspension length required for your installation by pressing in the cable anchorage (G) in order to adjust the length of the safety cable (I) and then adjust the length of fabric cord (K) by pulling the excess above the canopy and securing with cord anchorage (H). Adjust cable supports (L) to ensure fabric cord (K) sits neatly.
- NOTE: Ensure entire weight of the pendant is supported by the safety cable (I), and not on the fabric cord (K).**
6. Loosen the screw (C) at the end of the safety cable (I), insert and loop the safety cable into one of the holes on mounting bracket (B).
 7. Tighten the screw (C) at the end of the safety cable (I) and ensure it is attached securely.
 8. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
 9. Connect the mains supply wire to the terminal block (J). Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green 
 Neutral – Blue or Black
 Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green 
 Blue or N
 Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

10. Install the canopy (F) back onto the mounting bracket (B) and secure by tightening the screws (E) on the sides.
11. Install globes (N – not included) into the lamp holders (O) of light fixture. Do not exceed the maximum wattage rating.
12. Install the glass shades (M) onto the lamp holders (O) of light fixture.
13. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

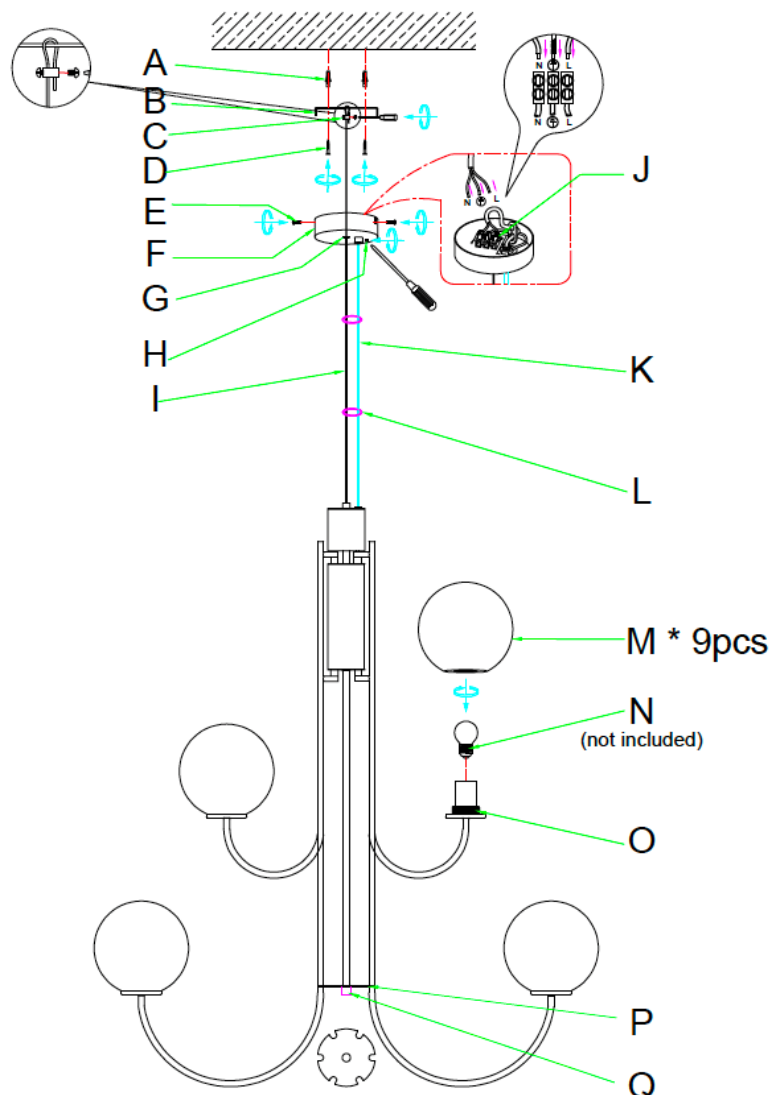


Fig. 2 Installation Diagram

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	039378	039379
Colour	Aged Brass Finish with Gloss Opal Glass	Bronze Finish with Sepia Glass
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	405W Max. (9 x 45W Max.)	
Lamp Holder	ES/E27	
Weight	10.5kg	
Canopy Dimensions	H:35mm Dia:120mm	
Luminaire Dimensions	H:1120mm Dia:960mm Susp:2000mm MAX	