

## ALANA 3 LIGHT PENDANT

SKU# 039388, 039389

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - Due to the size/weight/wiring of the luminaire, two people will be required to lift it up during the installation process.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

**NOTE: This luminaire can be installed with or without the lamp shade, please refer to:**

Luminaire with shade – See installation directions (page 2) and diagram (page 3).

Luminaire without shade – See installation directions (page 4) and diagram (page 5).


Installation Directions for Luminaire with Shade (refer to diagram on page 3)

**WARNING:** Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
- 2. Remove the mounting bracket (B) from the canopy (E) by loosening the screws (C) on the side.
- 3. Use the mounting bracket (B) as a template to mark the mounting screw hole positions on the ceiling.
- 4. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.

**NOTE:** Due to the size/weight/wiring of the luminaire, two people will be required to lift it up during the installation process.

- 5. Connect the mains supply wires to the terminal block (F).

| Mains Supply Wire       | Luminaire Wire / Terminal Block   |
|-------------------------|---|
| Earth – Yellow/Green    | Yellow/Green or  |
| Neutral – Blue or Black | Blue or N   |
| Live – Brown or Red     | Brown or L  |

**NOTE:** This luminaire is a Class I product and must be earthed during wiring and installation.

- 6. Ensure the wires are secure and no bare wires are exposed.
- 7. Install the canopy (E) back onto the mounting bracket (B) and secure by tightening the screws (C) on the side.


**NOTE:** Check and ensure that the load/weight of the luminaire is NOT placed onto the cord (H) suspension. The load/weight of the luminaire MUST always be on the chain (G) suspension.

- 8. Check and ensure the luminaire arms (I) are straight and evenly spaced out.
- 9. Remove the lamp holder rings (L) from the lamp holders (M).
- 10. Install the lamp shades (K) onto the lamp holders (M) and secure by tightening the lamp holder rings (L) back onto the lamp holders (M).
- 11. Install globes (J - not included) into the lamp holders (M). Do not exceed the maximum wattage rating.

**NOTE:** This luminaire must use a Fancy Round or Candle globe only when using the lamp shade (K).

- 12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

Installation Diagram for Luminaire with Shade (refer to Installation Directions on page 2)

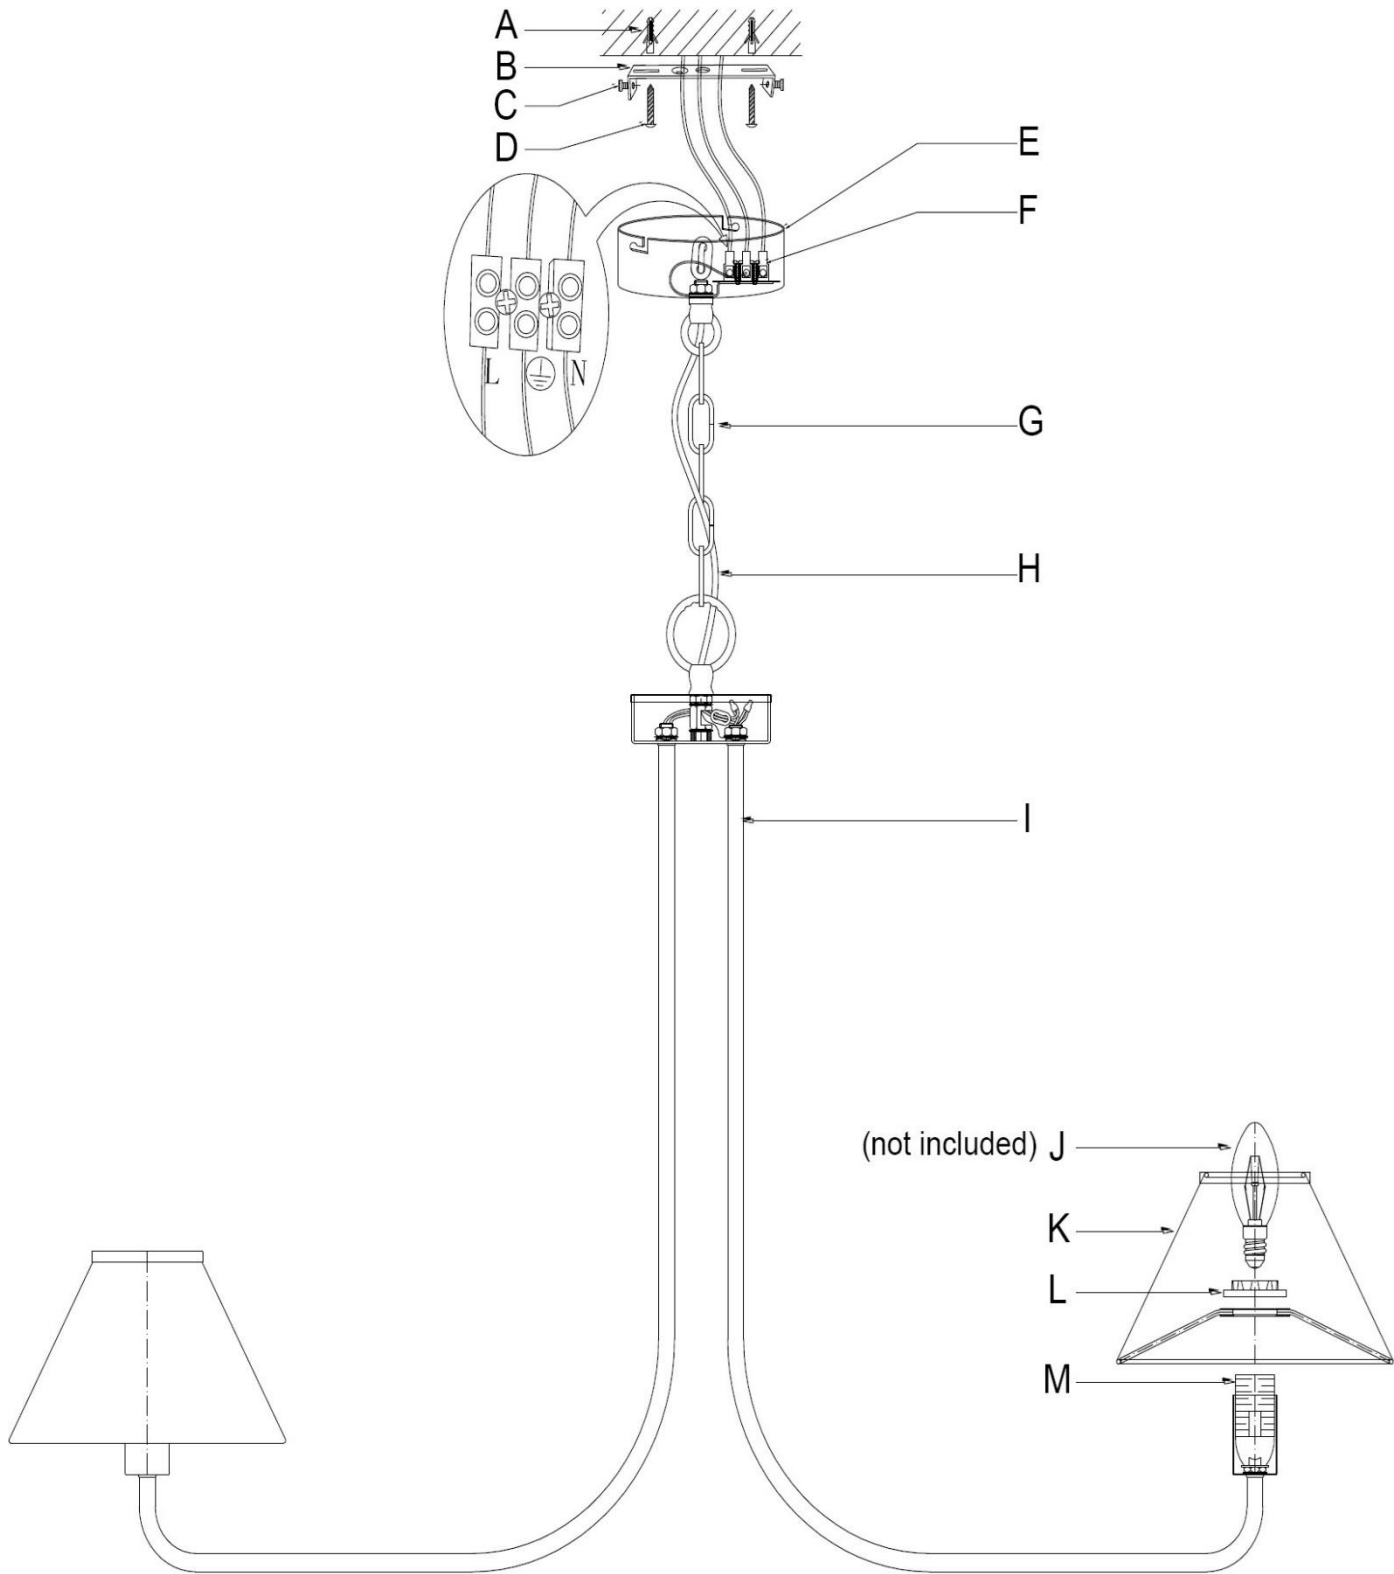


Installation Directions for Luminaire without Shade (refer to diagram on page 5)

**WARNING:** Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
- 2. Remove the mounting bracket (B) from the canopy (E) by loosening the screws (C) on the side.
- 3. Use the mounting bracket (B) as a template to mark the mounting screw hole positions on the ceiling.
- 4. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.

**NOTE:** Due to the size/weight/wiring of the luminaire, two people will be required to lift it up during the installation process.

- 5. Connect the mains supply wires to the terminal block (F).

| Mains Supply Wire       | Luminaire Wire / Terminal Block   |
|-------------------------|---|
| Earth – Yellow/Green    | Yellow/Green or  |
| Neutral – Blue or Black | Blue or N   |
| Live – Brown or Red     | Brown or L  |


**NOTE:** This luminaire is a Class I product and must be earthed during wiring and installation.

- 6. Ensure the wires are secure and no bare wires are exposed.
- 7. Install the canopy (E) back onto the mounting bracket (B) and secure by tightening the screws (C) on the side.

**NOTE:** Check and ensure that the load/weight of the luminaire is NOT placed onto the cord (H) suspension. The load/weight of the luminaire MUST always be on the chain (G) suspension.

- 8. Check and ensure the luminaire arms (I) are straight and evenly spaced out.
- 9. Remove the lamp holder rings (L) from the lamp holders (M).
- 10. Install the decorative rings (O) onto the lamp holders (M).
- 11. Install globes (J - not included) into the lamp holders (M). Do not exceed the maximum wattage rating.
- 12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

**Installation Diagram for Luminaire without Shade (refer to Installation Directions on page 4)**

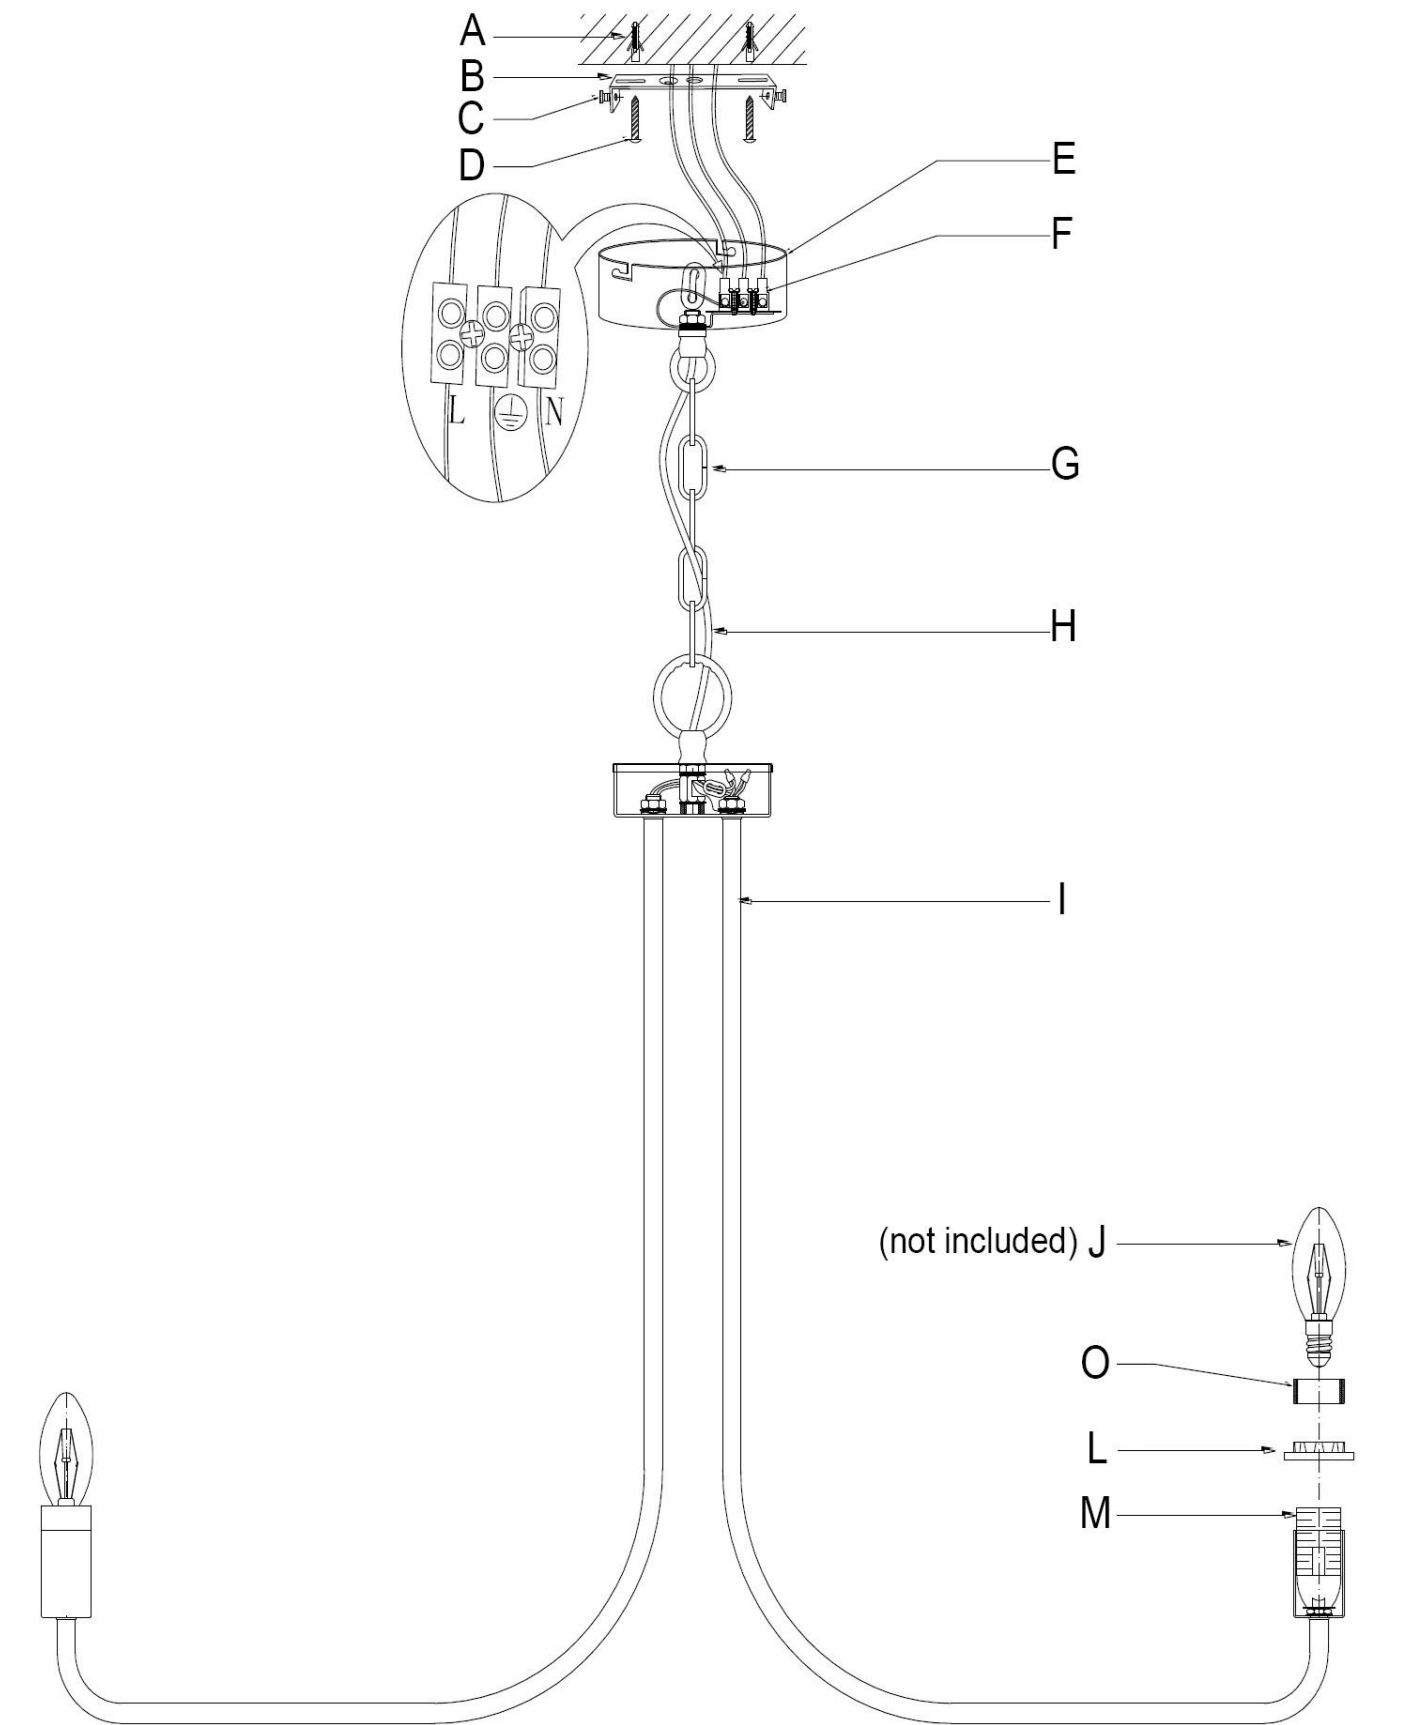

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

| Specifications       |  |                               |
|----------------------|--|-------------------------------|
| SKU#                 | 039388   | 039389                        |
| Colour               | Aged Brass Finish / White Linen  | Bronze Finish / Natural Linen |
| Rated Voltage        | 220-240V~ 50Hz   |                               |
| Rated Wattage        | 84W Max. (3x Max. 28W)   |                               |
| Protection Class     | Class I  |                               |
| Lamp Holder          | SES / E14<br>(Fancy Round or Candle globes only when using the lamp shade) |                               |
| Weight               | 1.8kg  |                               |
| Canopy Dimensions    | H:35mm Dia:120mm   |                               |
| Luminaire Dimensions | H:540mm Dia:600mm Susp:2000mm Max.   |                               |