

## ARIANA 6+4 LIGHT PENDANT / CLOSE-TO-CEILING FITTING

SKU# 050009

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
E.g.AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling.  
If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Select the type of installation you require before assembly and installation:
  - This luminaire can be installed as a Pendant or Close-to-Ceiling fitting.
  - Refer to the corresponding instructions and diagram for the different installation methods.

**NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.**

**NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.**

## PENDANT INSTALLATION INSTRUCTIONS (Refer to the diagram on Page 3)

1. Install globes (U – not included) into the lamp holders (T). Do not exceed the maximum wattage rating.
2. Remove the inner cover plates (Q – 4 pcs) from the top inner bracket (S) of the luminaire by loosening the screws (N).
3. Install the alabaster shade pieces (P – 40 pcs), by carefully inserting them onto the luminaire through the holes of top inner bracket (S) of the luminaire and sliding them around the frame.
4. Install the inner cover plates (Q – 4 pcs) back onto the top inner bracket (S) of the luminaire and secure by tightening the screws (N). Take care not to overtighten the screws (N) and damage the alabaster shade pieces (P) below.
5. Repeat the above three steps (2–4) for the outer shade with the outer cover plates (O – 4 pcs) on the top outer bracket (R) and installing the additional alabaster shade pieces (P – 52 pcs).

**NOTE: when handling the alabaster shade pieces (P), ensure care is taken so they do not crack or break. Ensure all alabaster shade pieces (P) are installed prior to hanging from the hook mounting bracket (B).**


**NOTE: Ensure all alabaster shade pieces (P) are evenly spaced to minimise any gaps between them. Alabaster is a naturally occurring stone, and as such variations in colour and size may occur.**

6. Use the pendant hook mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
7. Loosen the screw at the end of the safety lanyard (G) and loop the safety lanyard onto the pendant hook mounting bracket (B). Tighten the screw at the end of the safety lanyard (G) and ensure it is attached securely.
8. Install the pendant hook mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
9. Determine the suspension length required for your installation location. The chain suspension (M) length can be adjusted by using the chain link connectors (L). Excess cable (H) can be pulled into the canopy (J) and secured using the plastic cable anchorage (E). After adjusting the suspension length, check and ensure that NO load/weight is placed onto the cable (H). The full load/weight of the pendant must always be on the chain suspension (M).
10. Use the luminaire hook (I) to hang up onto the pendant hook mounting bracket (B).
11. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green  
Neutral – Blue or Black  
Live – Brown or Red

### Luminaire Wire / Terminal Block

Yellow/Green or   
Blue or N  
Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

12. Slide and install the canopy (J) over the hook mounting bracket (B) and secure by tightening the screw (K).

**NOTE: Check and ensure the chain suspension (M) is not squashing or rubbing against the cable (H).**

**NOTE: Ensure the load/weight of the pendant is on the chain suspension (M) and not the cable (H) by checking the chain suspension (M) is in tension and not the cable (H).**


**NOTE: The load/weight of the pendant MUST always be on the chain suspension (M) and NEVER on the cable (H).**

13. Install the threaded pipe (W) onto the bolt (V) at the bottom of the luminaire.
14. Attach the alabaster under-shade (X) onto the threaded pipe (W) and secure it onto the luminaire body by installing the plastic washer (Y), metal washer (Z), Hex nut (AA) and decorative screw nut (AB).

**NOTE: Ensure the plastic washer (AA), metal washer (AB), Hex nut (AC) and decorative screw nut (AD) are installed in the correct sequence.**

15. After the installation, switch on the fitting to test and enjoy your new lighting product.

## PENDANT INSTALLATION DIAGRAM (Refer to the installation steps on Page 2)

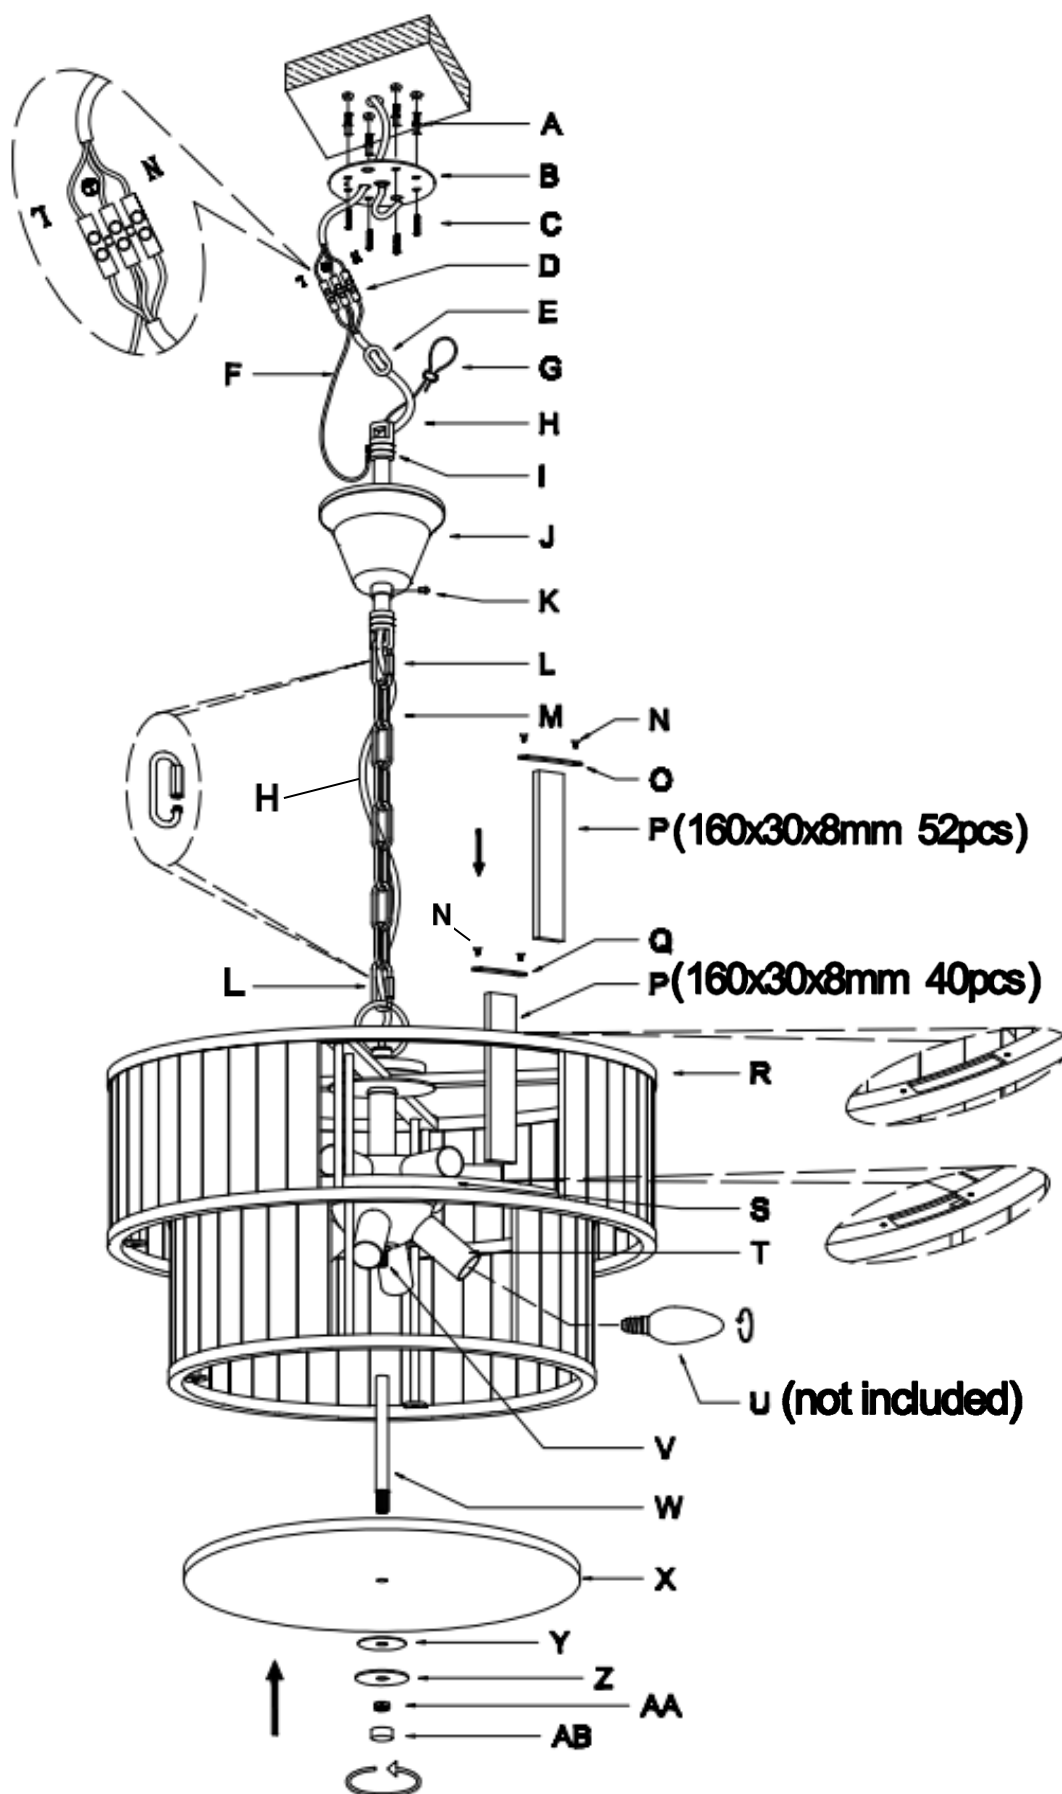

## CLOSE TO CEILING INSTALLATION INSTRUCTIONS (Refer to the diagram on page 5)

1. Remove all components relating to the chain suspension from the luminaire. This will require loosening and removing the screw (K) at the end of the safety lanyard (L), disconnecting all wiring from the terminal block (D), and removing the plastic cable anchorage (E) from the luminaire cable (F).
2. Install globes (W – not included) into the lamp holders (V). Do not exceed the maximum wattage rating.
3. Remove the inner cover plates (S – 4 pcs) from the top inner bracket (U) of the luminaire by loosening the screws (O).
4. Install the alabaster shade pieces (Q – 40 pcs), by carefully inserting them onto the luminaire through the holes of top inner bracket (U) of the luminaire and sliding them around the frame.
5. Install the inner cover plates (S – 4 pcs) back onto the top inner bracket (U) of the luminaire and secure by tighten the screws (O). Take care not to overtighten the screws (O) and damage the alabaster shade pieces (Q) below.
6. Repeat the above three steps (3–5) for the outer shade with the outer cover plate (P – 4 pcs) on the top outer bracket (T) and installing the additional alabaster shade pieces (Q – 52 pcs).

**NOTE: when handing the alabaster shade pieces (Q), ensure care is taken so they do not crack or break. Ensure all alabaster shade pieces (Q) are installed prior to installing the fitting onto the mounting bracket (B).**

**NOTE: Ensure all alabaster shade pieces (Q) are evenly spaced to minimise any gaps between them. Alabaster is a naturally occurring stone, and as such variations in colour and size may occur.**

7. Insert the luminaire cable (F) and safety lanyard (L) through the centre hole of the CTC canopy (M).
8. Lower the CTC canopy (M) onto the luminaire body and insert the bolt (R) at the top of the luminaire into canopy (M).
9. secure the CTC canopy (M) onto the luminaire body by installing the star washer (I), lock washer (H) and nut (G) over the luminaire cord (F) and onto the bolt (R) at the top of the luminaire body.


**NOTE: Ensure the star washer (I), lock washer (H) and nut (G) are installed in the correct sequence.**

10. Use the CTC mounting bracket (B) as a template to mark the screw positions on the ceiling.
11. loop the safety lanyard (L) onto the CTC mounting bracket (B) and reattach the screw (K) to the safety lanyard (L).
12. Tighten the screw (K) at the end of the safety lanyard (L) and ensure it is attached securely.
13. Install the CTC mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
14. Connect the luminaire wires from the cable (F), the earth wire (J) from the mounting bracket (B), and the mains supply wire to the terminal block (D). Ensure the wires are secure and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green  
Neutral – Blue or Black  
Live – Brown or Red

### Luminaire Wire / Terminal Block

Yellow/Green or   
Blue or N  
Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

15. Install the CTC canopy (M) onto the mounting bracket (B) and secure by tightening the nuts (N).
16. Install the threaded pipe (Y) onto the bolt (X) at the bottom of the luminaire.
17. Attach the alabaster under-shade (Z) onto the threaded pipe (Y) and secure it onto the luminaire body by installing the plastic washer (AA), metal washer (AB), Hex nut (AC) and decorative screw nut (AD).

**NOTE: Ensure the plastic washer (AA), metal washer (AB), Hex nut (AC) and decorative screw nut (AD) are installed in the correct sequence.**

18. After the installation, switch on the luminaire to test and enjoy your new lighting product.

Diagram illustrating the exploded view of a modern chandelier assembly, showing various components and their assembly sequence:

- Components:** A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q (160x30x8mm 52pcs), R, S (160x30x8mm 40pcs), T, U, V, W (not included), X, Y, Z, AA, AB, AC, AD.
- Assembly Sequence:** The diagram shows the assembly process starting from the top mounting bracket (A) and proceeding downwards through the central rod (F), the glass shade (R), and the base (Z).
- Dimensions and Quantities:** Q (160x30x8mm 52pcs) and S (160x30x8mm 40pcs) are specified for the glass shade components.
- Notes:** W (not included) indicates that light bulbs are not included in the package.

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

SKU #	050009
Colour	Aged Brass Finish with Spanish Alabaster Stone shade
Rated Voltage	220-240V~ 50Hz
Rated Wattage	280W Max. (10 x Max. 28W)
Lamp Holder	SES / E14
Weight	16.8kg

## Pendant Dimensions:

Bell shaped Canopy Dimensions	H:85mm Dia:120mm
Pendent Luminaire Dimensions	H:370mm Dia:520mm Susp:2000mm MAX

## Close-to-Ceiling Dimensions:

Flat shaped Canopy Dimensions	H:30mm Dia:200mm
CTC Luminaire Dimensions	H:355mm Dia:520mm