

## ARIANA 10 LIGHT LINEAR PENDANT

SKU# 050011

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.  
E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation Directions

**NOTE: Assembly and installation of this luminaire must be done by a licensed electrician.**

**NOTE: Due to the weight and the size of the luminaire, two people will be required to lift it up during the installation process.**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the cover plates (U – 4 pcs) from the top bracket of the luminaire (W) by loosening the screws (T).
3. Install the alabaster shade pieces (V – 100 pcs), by carefully inserting them onto the luminaire (W) through the holes of top bracket of the luminaire (W) and sliding them around the frame.

**NOTE: when handling the alabaster shade pieces (V), ensure care is taken so they do not crack or break. Ensure all alabaster shade pieces (V) are installed prior to hanging from the mounting bracket (B).**

**NOTE: Ensure all alabaster shade pieces (V) are evenly spaced to minimise any gaps between them. Alabaster is a naturally occurring stone, and as such variations in colour and size may occur.**

4. Install the cover plates (U– 4 pcs) back onto the top bracket of the luminaire (W) and secure by tighten the screws (T). Take care not to overtighten the screws (T) and damage the alabaster shade pieces (V) below.
5. Remove the mounting bracket (B) from the canopy (G) by loosening the nuts (H).
6. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
7. Determine the suspension length required for your installation location. Install the required lengths of suspension rod (P, Q, R, S) onto the body of the luminaire. Pull the cord out as you install the suspension rods (P, Q, R, S) to remove any slack. Take care, not to cross-thread or twist and damage the cord. Excess cord (L) can be pulled into the canopy (G) and secured using the plastic cable anchorage (K).
8. Install the canopy (B) onto the top suspension rod and secure by installing the star washer (O), lock washer (N) and hex nut (M).

**NOTE: Ensure that the star washer (O), lock washer (N) and hex nut (M) are installed in the correct sequence.**

9. loop the safety lanyard (E) onto the mounting bracket (B). Tighten the screw (D) at the end of the safety lanyard (E) and ensure it is attached securely.
10. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
11. Connect the luminaire wires and mains supply wires to the terminal block (J). Ensure the wires are secure and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### Luminaire Wire / Terminal Block

Yellow/Green or 


Blue or N

Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

**NOTE: Ensure the earth wire (I) from the mounting bracket (B) and the earth wire (F) from the luminaire body are both connected to the terminal block (J).**

12. Install the canopy (G) onto the mounting bracket (B) and secure by tightening the nuts (H).
13. Install globes (Z – not included) into the lamp holders (X). Do not exceed the maximum wattage rating.
14. After the installation, switch on the fitting to test and enjoy your new lighting product.

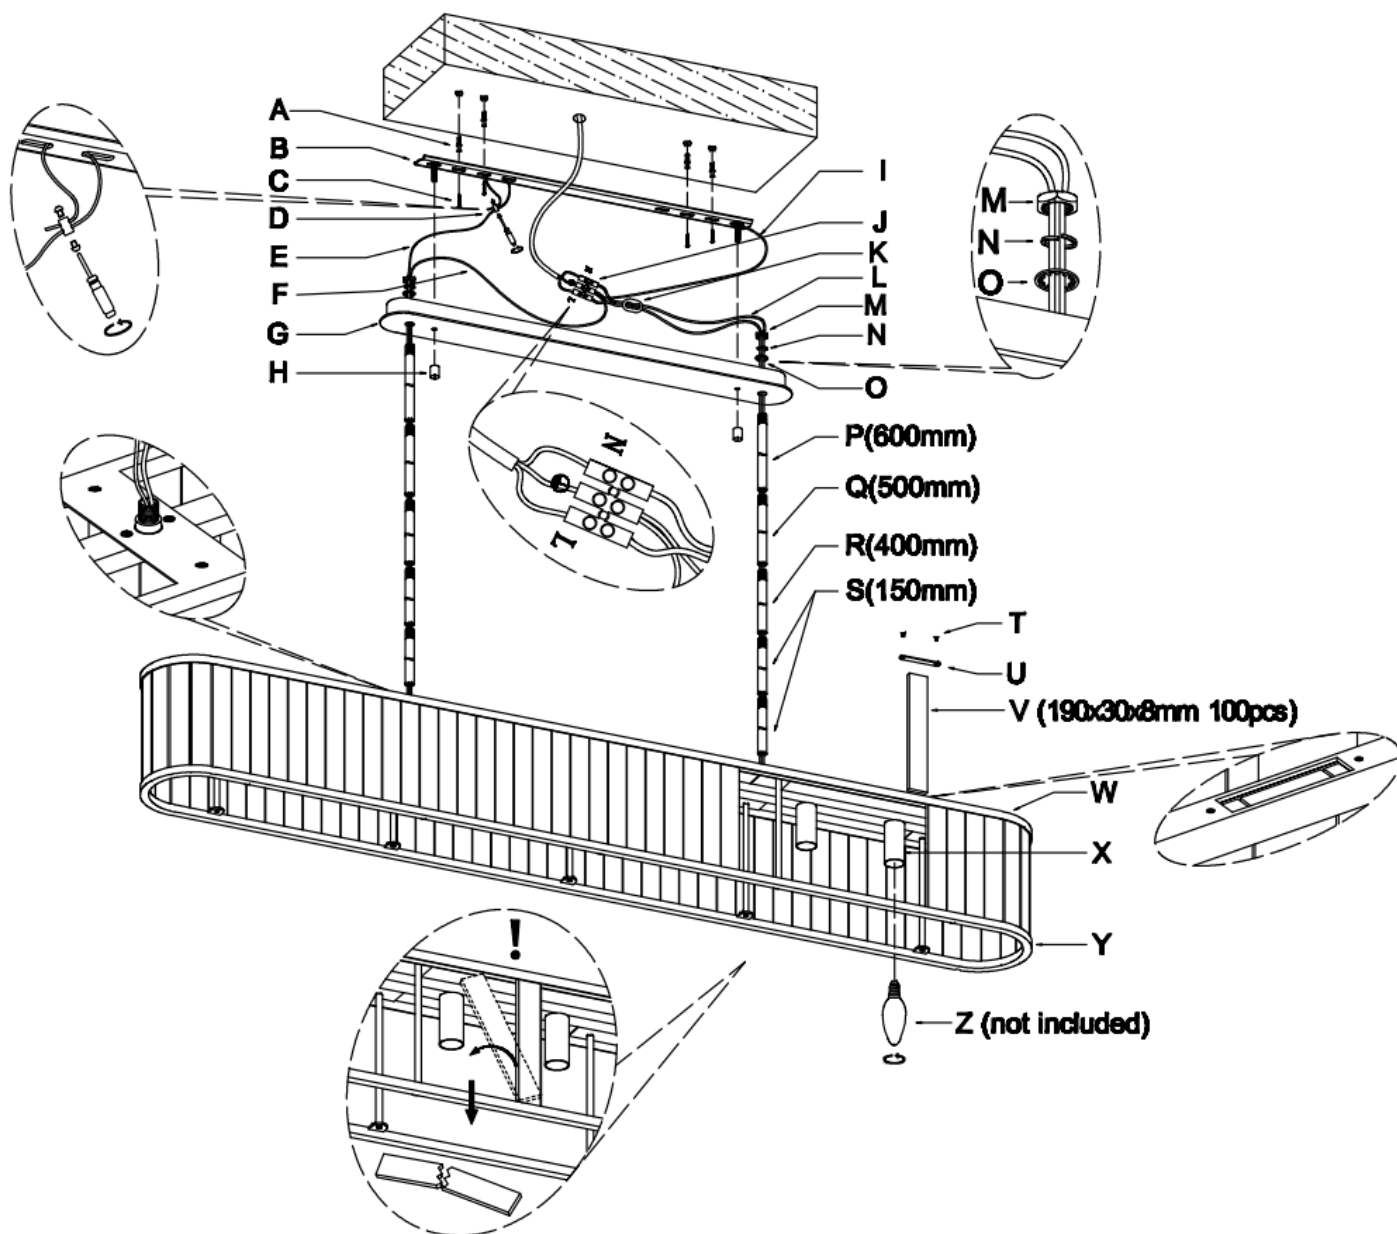

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications			
SKU #	050011		
Colour	Aged Brass Finish with Spanish Alabaster Stone shade		
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	280W Max. (10 x Max. 28W)		
Lamp Holder	SES / E14		
Weight	18.1kg		
Canopy Dimensions	L:670mm	W:70mm	H:30mm
Luminaire Dimensions	H:205mm	L:1450mm	W:160MM    Susp:1800mm MAX