

## CORBELLE MEDIUM PENDANT

SKU# 050341, 050342

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation Requirements

- This fitting must be assembled and installed by a licensed electrician.
- All wiring and installation of the fitting must adhere to local and national wiring rules.  
eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This fitting is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the fitting.
  - Ensure the fitting is not installed in direct line of an air vent/system.
  - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

**NOTE: Due to the size and weight of the fitting, two people may be required to lift up the fitting during installation**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, lay the fitting on a smooth non-scratch surface.
2. Use the hook mounting bracket (E) as a template to mark the hole positions on the ceiling.
3. Install the hook mounting bracket (E) onto the ceiling. Depending on the mounting surface, either use appropriately sized mounting screws or use expansion bolts (A). Ensure the screws or the expansion bolts (A) used are suitable for the mounting surface and surrounding environment. If using expansion bolts (A) ensure to install the washer (B), spring washer (C) and nut (D).
4. Determine the suspension length required for your installation location. The chain suspension length can be adjusted by using the chain link connectors (I).
5. Hang the fitting onto the hook mounting bracket (E).

**NOTE: Check and ensure that NO load/weight is placed onto the supply cord (J) by the chain suspension.**

**The full load/weight of the pendant must always be on the chain suspension and NEVER on the cord (J).**

6. Remove the cover from the terminal block (F) and connect the mains supply wire.

**Mains Supply Wire**

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

**Fitting Wire**

Yellow/Green or

Blue or N


Brown or L

7. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block (F).

8. Slide and install the canopy (G) over the hook mounting bracket (E) and secure by tightening the screw (H).

9. Install globes (K - not included) into the lamp holders. Do not exceed the maximum wattage rating.

10. After the installation, switch on the fitting to test and enjoy your new lighting product.

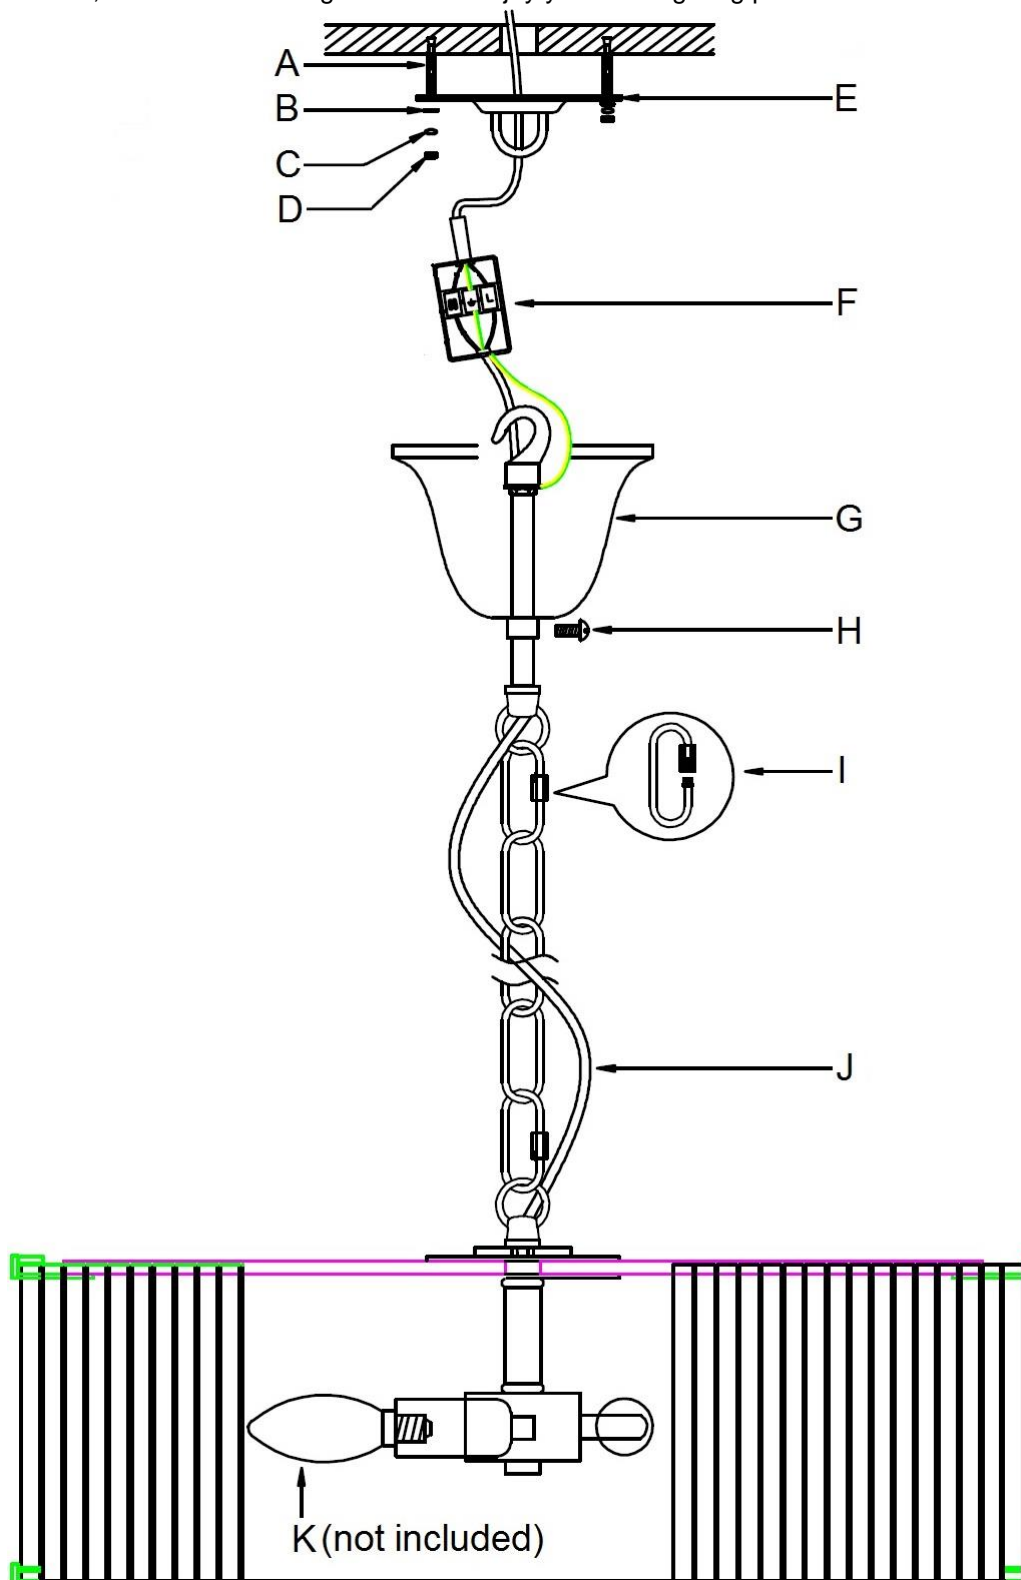

## Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

## Specifications

SKU #	050341	050342
Colour	Polished Chrome	Antique Black
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	180W Max. (4 x Max. 45W)	
Lamp Holder	SES / E14	
Weight	6.1kg	
Dimensions	H:220mm Dia:400mm Susp:2000mm	