

## CORBELLE 1 LIGHT PENDANT

SKU# 050347, 050348, 050352

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g.AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - Ensure the luminaire is not installed in the direct line of an air vent/system.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, lay the fitting on a smooth non-scratch surface.
2. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
3. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
4. Determine the suspension length required for your installation location. The chain suspension length can be adjusted by using the chain link connectors (F).
5. Use the luminaire ring (E) to hang up onto the mounting bracket (B).


# Installation Instructions

6. Connect the mains supply wire to the terminal block (D).

**Mains Supply Wire**

Earth – Yellow/Green  
Neutral – Blue or Black  
Live – Brown or Red

**Luminaire Wire / Terminal Block**

Yellow/Green or   
Blue or N  
Brown or L

**NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.**

7. Ensure the wires are secure and no bare wires are exposed.

8. Slide and install the canopy (I) over the hook mounting bracket (B) and secure by tightening the screw (J).

**NOTE: Check and ensure the chain suspension is not squashing or rubbing against the cord (K).**

**NOTE: Ensure the load/weight of the pendant is on the chain suspension and not the cord (K) by checking the chain suspension is in tension and not the cord (K).**

**NOTE: The load/weight of the pendant MUST always be on the chain suspension and NEVER on the cord (K).**

9. Install a globe (H - not included) into the lamp holder.


10. Install the glass rods (G), by carefully inserting them through the top and bottom brackets (N).

**NOTE: When handling the glass rods (G), ensure care is taken so they do not crack or break.**

11. Install the cover ring (M) onto the top of the luminaire and secure by tightening the screws (L).

Take care not to overtighten the screws (L) and damage the glass rods (G)

12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

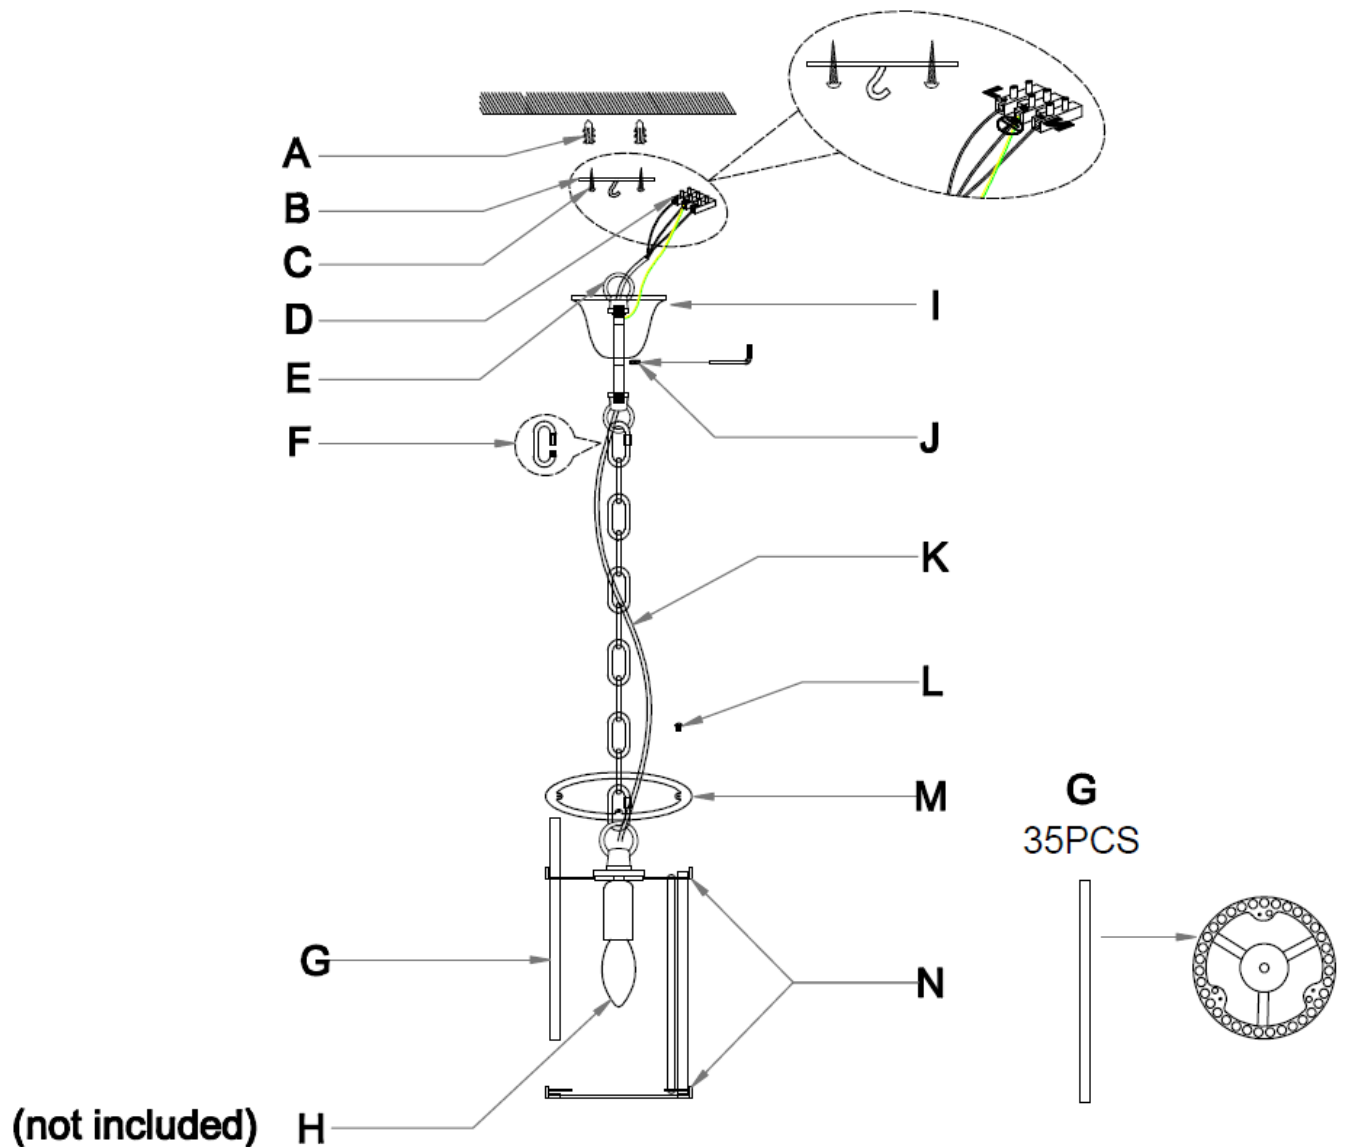

# Installation Instructions

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

## Specifications

SKU #	050347	050348	050352
Colour	Polished Chrome	Antique Black	Antique Brass Finish
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	45W Max.		
Lamp Holder	SES / E14		
Weight	2.7kg		
Canopy Dimensions	H:60mm Dia:92mm		
Luminaire Dimensions	H:285mm Dia:150mm Susp:2000mm		