

## KORALKY CLOSE TO CEILING

SKU# 050396, 050397, 050398, 050399

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the light luminaire must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This product is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - Ensure the luminaire is not installed in direct line of an air vent/system.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. To help with assembly, lay the luminaire on a flat and smooth non-scratch surface.
3. Use the mounting bracket (C) as a template to mark the screw positions on the ceiling and drill any holes required.
4. Install the mounting bracket (C) onto the ceiling by using appropriately sized mounting screws (D) and anchors (B). Ensure the screws (D) and anchors (B) used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wire to the terminal block (A). Ensure the wires are secure and no bare wires are exposed.


#### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red


#### Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L

6. Push the lamp base (E) up to cover the mounting bracket (C) and secure by tightening the nuts (F) onto the bracket bolts (H).
7. Install the rod (I) to the lamp holder bracket (P).
8. Install globes (G - not included) into the lamp holders (O). Do not exceed the maximum wattage rating.
9. Install the bottom plate of shade (J) onto the rod (I) followed by the washer (K). Then secure the shade by tightening the nut (L).
10. Install the decorative cover (M) onto the nut (L) then tighten the decorative nut (N).
11. After the installation, switch on the luminaire to test and enjoy your new lighting product.

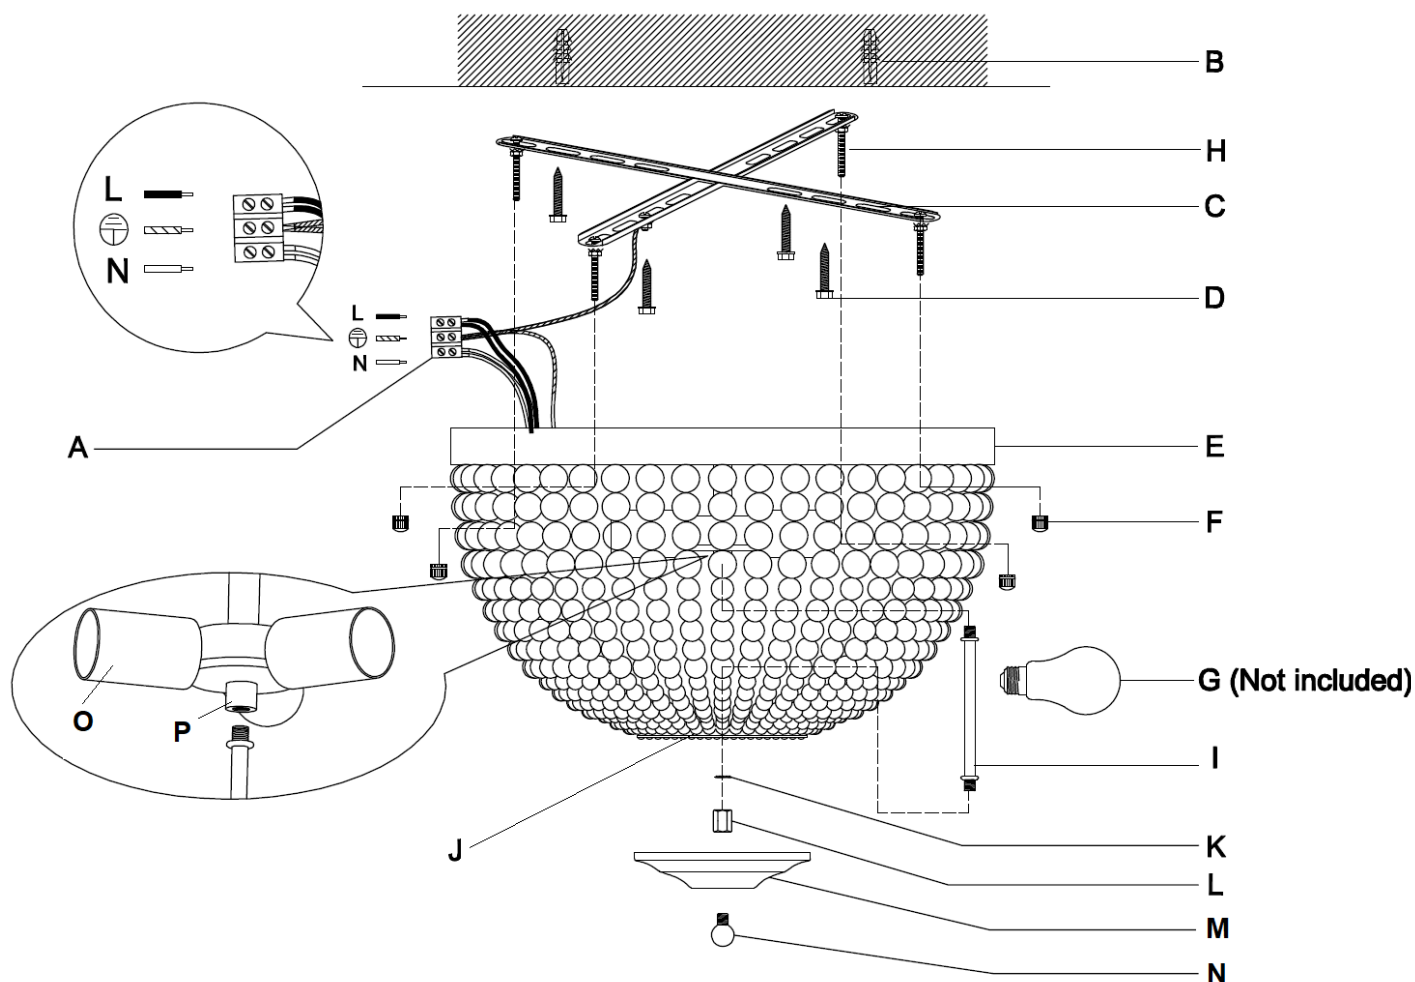

## Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

## Specifications

SKU #	050396	050397	050398	050399
Lights	2 lights		3 lights	
Colour	Black	White Wash	Black	White Wash
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	90W Max. (2 x Max. 45W)		135W Max. (3 x Max. 45W)	
Lamp Holder	ES / E27			
Weight	2.3kg		4.3kg	
Dimensions	Dia:350mm H:205mm		Dia:480mm H:300mm	