

MARCEL PENDANT

SKU# 011034, 011035, 011038 – 250mm

SKU# 011033, 011036, 011039 – 300mm

SKU# 011032, 011037, 011040 – 400mm

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non scratch surface.
2. Remove the mounting bracket (D) from the canopy (B) by loosening the screws (F) on each side.
3. Use the mounting bracket (D) as a template to mark the screw positions on the ceiling.
4. Install the mounting bracket (D) onto the ceiling by using appropriately sized mounting screws (E) and anchors (C). Ensure the screws (E) and anchors (C) used are suitable for the mounting surface and surrounding environment.
5. Remove the cover from the terminal box (A) and connect the mains supply wire to the terminal block.


Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Fitting Wire


Yellow/Green or 

Blue or N

Brown or L

6. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal box (A).
7. Install the canopy (B) onto the mounting bracket (D) by tightening the screws (F) on each side.

8. Install a globe (K- not included) into the lamp holder (I). Do not exceed the maximum wattage rating.
9. Insert the lamp holder (I) with globe into the glass shade (J).
10. Install the rods (H) into the lamp holder bracket.
11. Install the glass shade (J) by resting them onto the rods (H). Ensure the glass shade (J) hangs straight.
12. Place the decorative cover plate (G) on top of the glass shade (J).
13. After the installation, switch on the fitting to test and enjoy your new lighting product.

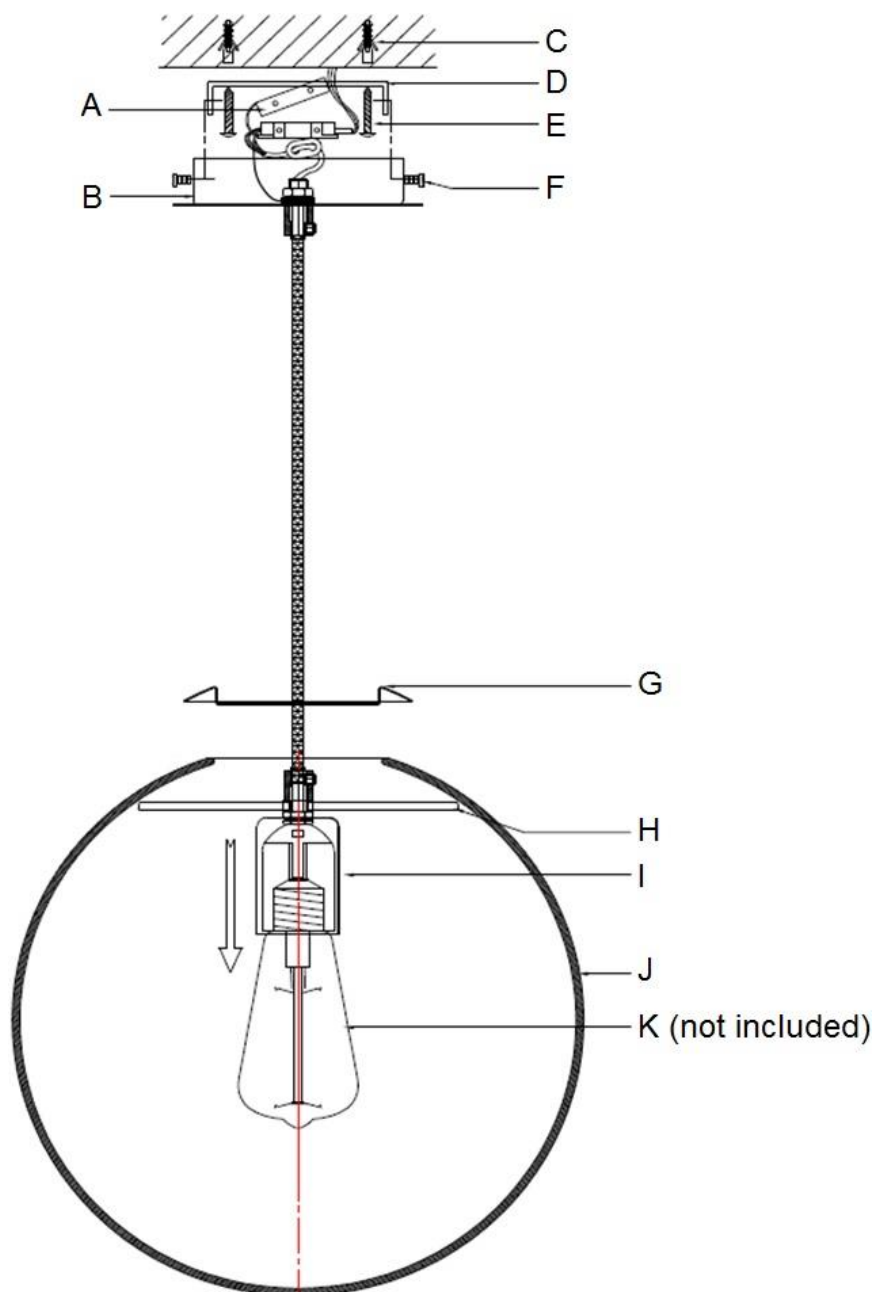

Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications									
SKU #	011034	011035	011038*	011033	011036	011039*	011032	011037	011040*
Colour/ Finish	Matte Black/ Smoke Glass	Matte Black/ Clear Glass	Brass/ Clear Glass	Matte Black/ Smoke Glass	Matte Black/ Clear Glass	Brass/ Clear Glass	Matte Black/ Smoke Glass	Matte Black/ Clear Glass	Brass/ Clear Glass
Rated Voltage	220-240V~ 50Hz								
Rated Wattage	Max. 60W								
Lamp Holder	ES / E27								
Weight	1.2kg			1.4kg			2.6kg		
Dimensions	H:240mm Dia:250mm Susp:2000mm			H:290mm Dia:300mm Susp:2000mm			H:380mm Dia:400mm Susp:2000mm		

***NOTE:** Brass is designed to develop a natural patina finish over time. It can be polished back to its original finish if desired.