

JESSY 3 LIGHT SPOT LIGHT

SKU# 140771, 140774

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

1. Remove the mounting bracket from the luminaire by loosening the screw on the side.
2. Slide the luminaire terminal block out from the mounting bracket terminal block.
3. Use the mounting bracket as a template to mark the screw hole positions on the ceiling.
Install appropriately sized anchors into the ceiling, ensure the anchors used are suitable for the mounting surface and the surrounding environment.
4. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green 
 Neutral – Blue or Black
 Live – Brown or Red


Luminaire Wire / Terminal Block

Yellow/Green or 
 Blue
 Brown

NOTE: The luminaire is a Class I product and must be earthed during wiring and installation.

Slide the luminaire terminal block back into the mounting bracket terminal block.

6. Install the luminaire onto the mounting bracket.
7. Secure the luminaire by tightening the screw on the side.
8. Install globes (not included) into the lamp holders. Do not exceed the maximum wattage rating:
9. Install the shades over the lamp holders. Check the gap on the shade aligns with the lamp holder arm.
10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

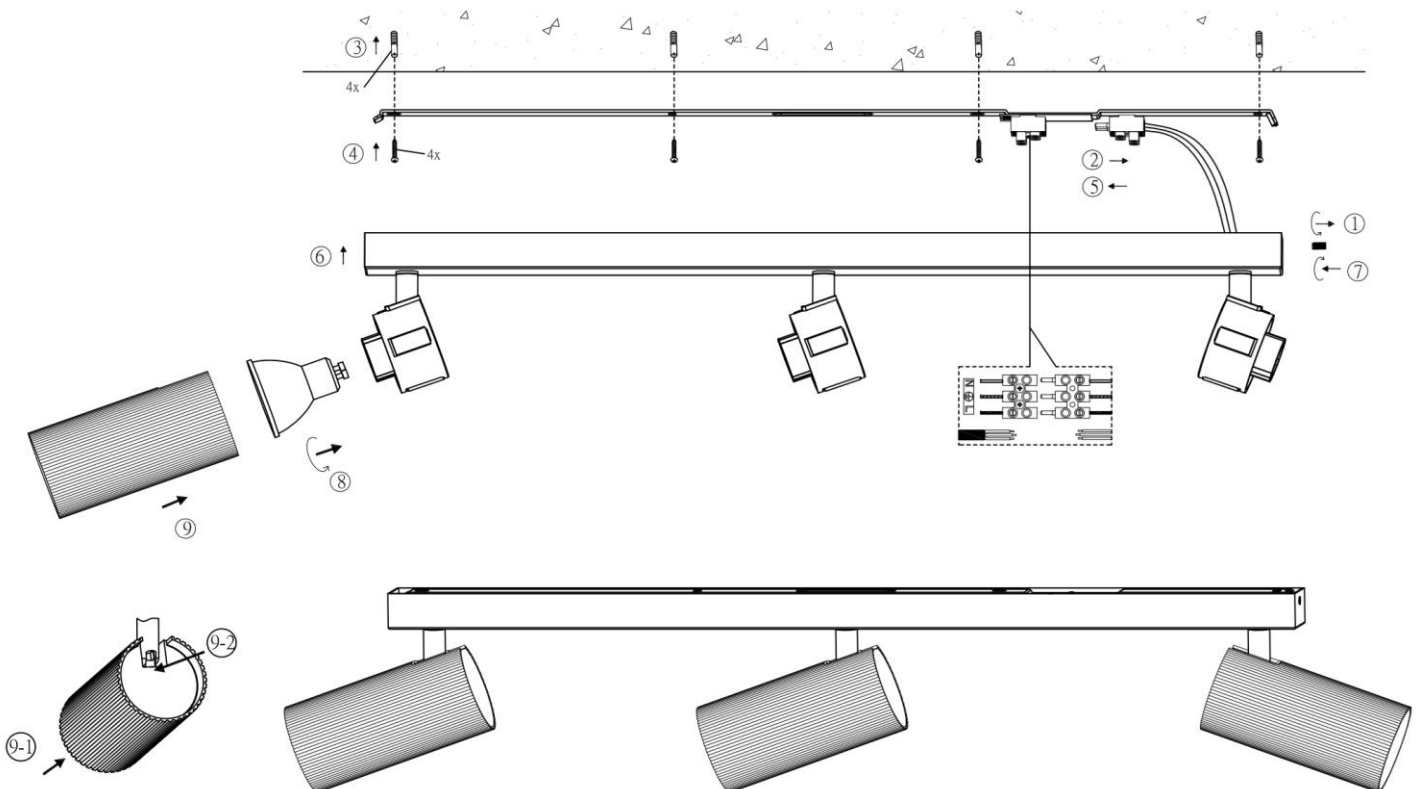

NOTE: Do not rotate the shade left/right more than 330°, as this may damage the joint and the internal wires.

NOTE: Do not adjust the shade up/down more than 70°, as this may damage the joint and the internal wires

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamp or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	140771	140774
Colour	Textured White	Textured Black
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	30W Max. (3x Max.10W – LED only)	
Lamp Holder	GU10	
Weight	1.0kg	
Dimensions	H:96mm W:56mm L:687mm	