

NEWELL 4 LIGHT DIY PENDANT

SKU# 090765

Rated Voltage 220-240V~ 50Hz
DIY (Installation onto existing batten holder)

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This fitting is covered by a 12 month warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- This fitting is a DIY (Do It Yourself) product, no electrical wiring connection or disconnection is required.

 The service of a licensed electrician is not required.
- This fitting is designed to be used with a batten holder (not included).
 - The installation location must have an existing batten holder (not included) pre-installed.
 - If you don't have a batten holder (not included), please contact your licensed electrician.
- Ensure the existing batten holder is in good working condition and the plastic has not become cracked or brittle.
- This product is suitable for indoor use only.
- Do not exceed the maximum globe wattage rating after the installation of this DIY product.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the batten holder you are working on has been switched OFF before commencing the installation.

Installation Directions

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.


- 1. Loosen the cord anchorage of the canopy.
- 2. Pull down the canopy.
- 3. Remove the batten cover from the canopy by loosening the screws on the sides.
- 4. Remove the batten holder skirt from the batten holder and place it between the batten cover and canopy.
- 5. Install the bayonet adaptor into the batten holder.
- 6. Install the batten cover over the batten holder.
- 7. Secure with the batten holder skirt.

NOTE: Ensure the batten holder skirt and the batten cover are attached securely. Check that it has taken up at least 2-3 full threads while attaching the batten holder skirt to the batten holder.

- 8. Install the canopy over the batten cover.
- 9. Secure the canopy by tightening the screws on the sides.
- 10. Push the canopy up to cover the batten cover. Then re-tighten the cord anchorage. Take care not to overtighten the cord anchorage and damage the cord.
- 11. Install a globe into the lamp holder. Do not exceed the maximum wattage rating.
- 12. Check and ensure the product is fully assembled with the globe installed before turning on the power to this DIY pendant. Switch on the fitting to test and enjoy your new lighting product.

1|Page v1.0(2019-11)



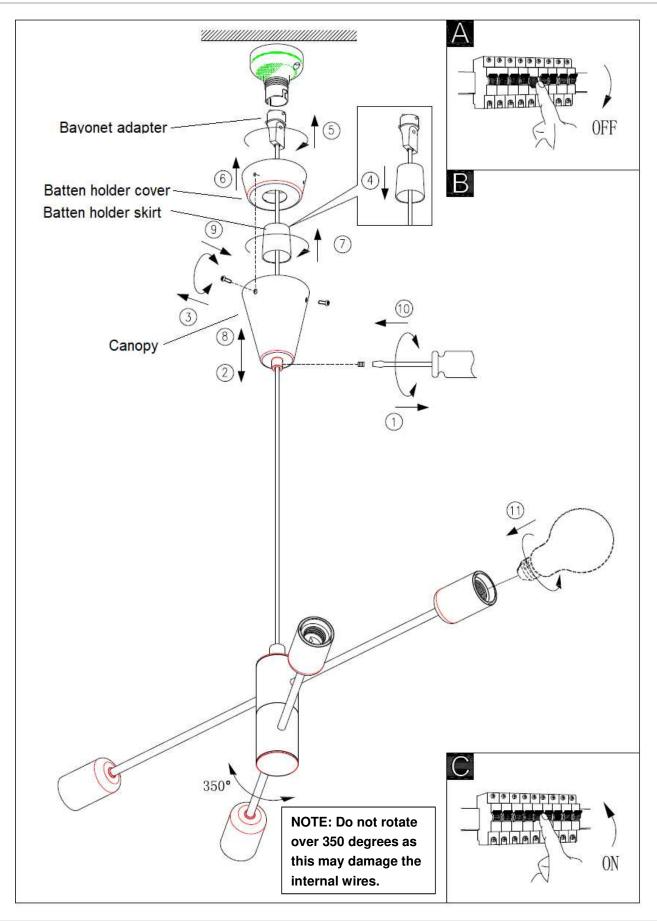

2|Page v1.0(2019-11)



Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- Handle the fitting and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications	
SKU#	090765
Model No.	204204
Colour	Black
Rated Voltage	220-240V~ 50Hz
Rated Wattage	180W Max. (4 x 45W Max.)
Lamp Holder	ES / E27
Weight	1.06kg
Dimensions	H:145mm W:650mm L:650mm
	Suspension:520mm

3|Page v1.0(2019-11)