

**Installation Instructions**  
**SKU# 230333(LD-Q6051/CHA)/ 230334(LD-Q6050/CHA)**  
**Rated Voltage 220-240V, 50Hz**

**PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT**

**WARNING** - to reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.

**INSTALLATION REQUIREMENTS:**


- **Must be installed by a Licensed Electrician.**
- **Must be installed according to the current wiring rules AS/NZS3000.**
- **Do not exceed the maximum wattage rating.**
- **Suitability for use “outdoors” IP44.**
- **Insulation class: CLASS I**

**INSTALLATION DIRECTION:**

- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
  - Ensure all power connection is off for your own safety.
  - Level all the components on a smooth surface and make sure there is no component missing before assembly.
1. Loose the screws to take off the lamp base
  2. Drill the holes on the wall and hammer the anchors in the wall
  3. Secure the bracket on the wall via tightening screws
  4. Secure the base on the bracket via tightening screws
  5. Connect the mains supply wire to the light fitting using the terminal block provided. Ensure that the wires are secure and no strains of bare wires are exposed.

<b>Mains Supply Wire</b>	<b>Fitting Wire</b>
Neutral – Blue or Black	Blue
Live – Brown or Red	Brown
Earth – Yellow/Green	Yellow/Green 

6. Install the bulb (not included).
7. Secure the lamp shade and cover via tightening the screws

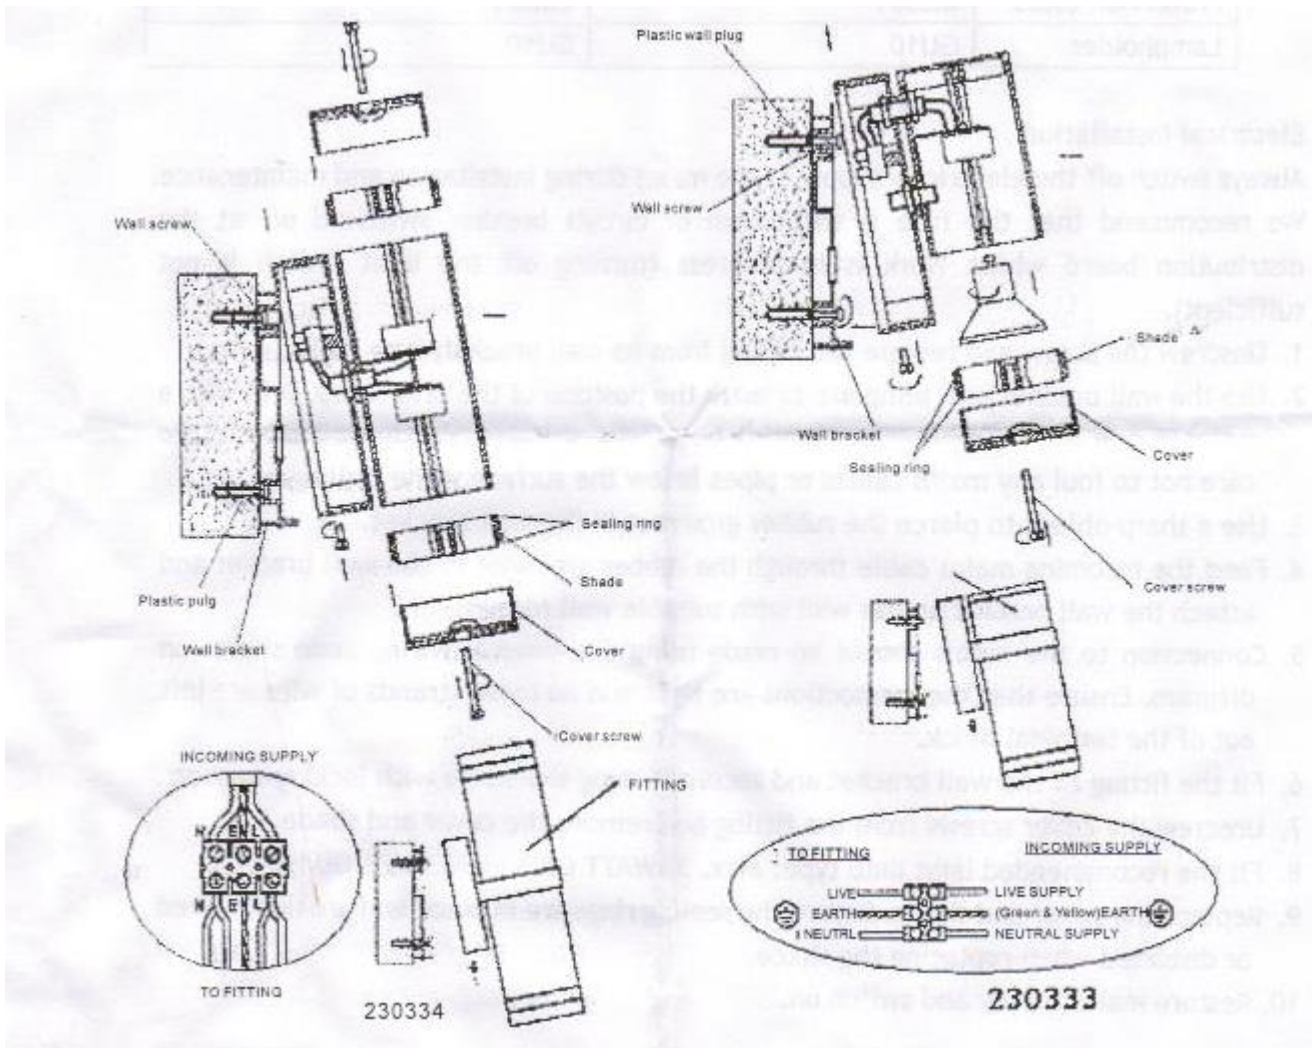

### **TIPS**

1. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
2. Handle the fitting and cover/shade with care to avoid breakage.
3. When changing or cleaning bulbs, turn OFF power and allow to cool. Do not touch bulbs with bare hands, use gloves or a tissue.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

### **SPECIFICATIONS:**

SKU #	Model #	Rated voltage	Lamp holder	Rated wattage
230333	LD-Q6051/CHA	220-240V~50Hz	GU10	1x Max.35W Halogen or 1x Max.11W CFL
230334	LD-Q6050/CHA	220-240V~50Hz	GU10	2x Max.35W Halogen or 2x Max.11W CFL