

## ARKET 2 LIGHT WALL BRACKET

SKU# 197080, 197081, 197082

Rated Voltage 220-240V~ 50Hz.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-months warranty. The warranty is from the date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating. This luminaire must be used with LED lamps only.
- The IP44 rating must be maintained during wiring and installation of the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - This luminaire is rated against water penetration to IP44 standards, which is water splashing from any direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation Directions

**NOTE: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.**

**NOTE: This luminaire can be installed on the wall in two ways: it can be installed vertically on the wall or installed horizontally on the wall, both installation methods are the same.**

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the shade (F) from the luminaire (I) by turning it counterclockwise.
3. Remove the mounting bracket (B) from the luminaire (I) by loosening the screws (E) on the sides.
4. Use the mounting bracket (B) as a template to mark the screw hole positions on the wall.
5. Install the mounting base (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
6. Remove the lid and gasket from the terminal box (D) by loosening the screws.
7. Connect the mains supply wires to the terminal block (L).

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

### Luminaire Wire / Terminal block

Yellow/Green or 

Blue or N

Brown or L


Ensure that the wires are secure, and no bare wires are exposed.

**NOTE: The luminaire is a Class I product and must be earthed during wiring and installation.**

8. Install the gasket and lid back onto the terminal box (D) and secure by tightening the screws.
9. Install the luminaire (I) onto the mounting bracket (B) and secure it by tightening the screws (E) on the sides.

**NOTE:** This luminaire can be installed on the wall in two ways: it can be installed vertically on the wall or installed horizontally on the wall. When the luminaire is installed horizontally on the wall, the drain hole (K) must face down; when the luminaire is installed vertically on the wall, the drain hole (J) must face down.

10. Install globes (G - not included) into the lamp holders (H). Do not exceed the maximum wattage rating.
11. Install the shades (F) back onto the luminaire and secure by turning them clockwise.
12. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new lighting product.

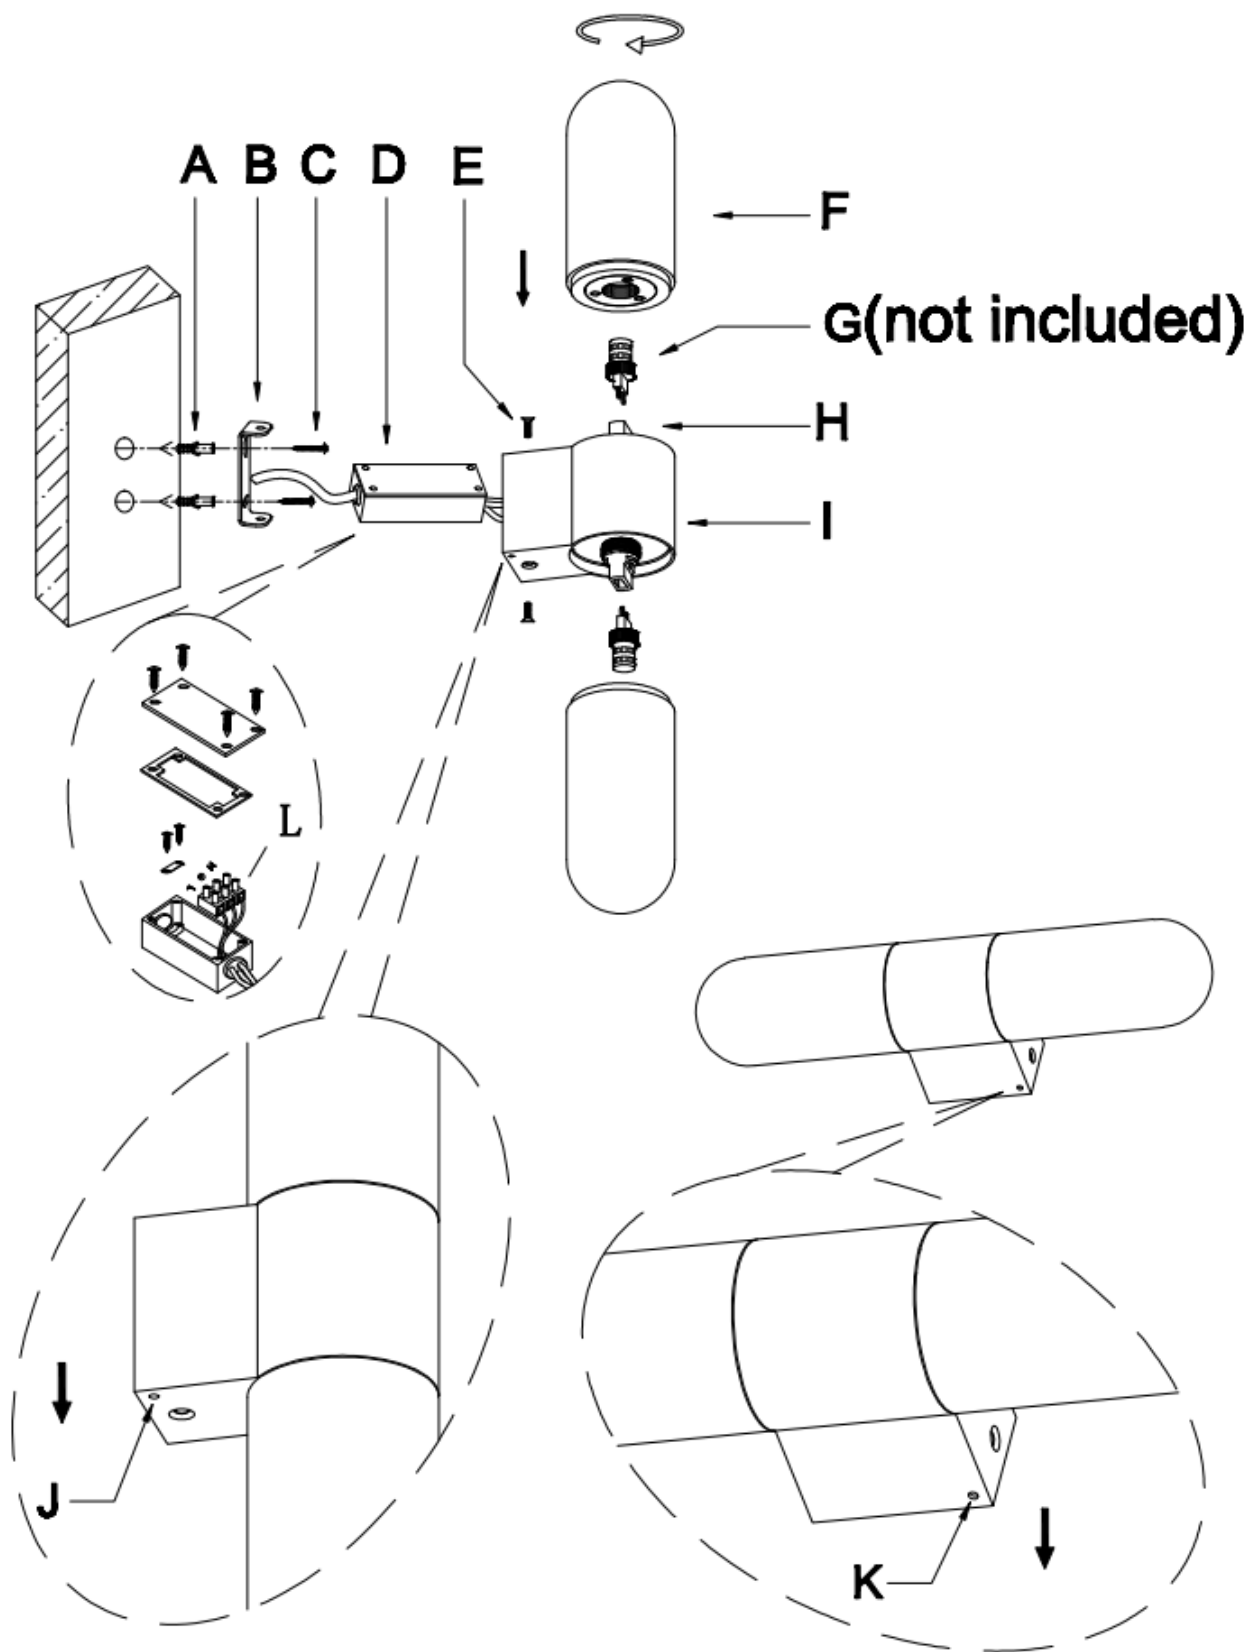

Install vertically

Install horizontally

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the lamps or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.

## Specifications

SKU #	197080	197081	197082
Colour	Brushed Chrome Finish / White Marble	Aged Brass Finish / Alabaster	Bronze Finish / Latte Alabaster
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	5W Max. (2 x Max. 5W LED globes only)		
IP Rating	IP44		
Lamp Holder	G9		
Weight	1.2kg		
Back Plate Diameter	W:40mm L: 60mm		
Luminaire Dimensions	H: 300mm L:60mm E: 93mm		