

## EOS II 70MM 4 LIGHT KIT

SKU# 220954, 220956

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This fitting is covered by a 3 year warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.
- This is a deck light and not suitable for use in areas such as driveways and concrete pathways where it is difficult to ensure proper drainage away from the fitting. Installation in these locations will void the warranty.
- This fitting is not suitable for use with dimmer switches. Warranty will be void if the fitting is used on the same circuit which has a dimmer switch.

### Installation Requirements

- This fitting is a DIY (Do It Yourself) product, no electrical wiring connection or disconnection is required. The service of a licensed electrician is not required.
- This fitting is designed to be used with a mains power socket outlet (not included). The installation location must have an existing mains power socket outlet (not included) pre-installed. If you don't have an existing mains power socket outlet (not included), please contact your licensed electrician.
- Select a suitable location for installation:
  - This product is suitable for indoor or outdoor use.
  - This fitting is protected against water penetration to IP65 standards, which is jets of water from any direction.
  - This fitting is not designed to be immersed in water. Ensure the fitting is installed in a location where the water can be easily drained away.
  - The connectors on the wiring kit are not designed to be immersed in water or installed under any soil or concrete. Ensure the connectors are positioned in a location where the water can be easily drained away.
  - This fitting can be used where normally flammable materials, including building insulation, are or maybe present, but cannot be abutted against any material and cannot be covered in normal use.
  - Take note of the clearance values. Do not remove any structural members for the installation of this product.


#### **RISK OF FIRE – BUILDING INSULATION MUST NOT COVER THIS LUMINAIRE**

HCB = 20mm MIC = 20mm SCB = 10mm SCI = 10mm

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Cut the installation holes into the deck:  $\varnothing$  62mm
3. Install the LED lights into the installation holes.
4. Remove the covers from the wiring kit connectors (E).
5. Install the LED lights into the wiring kit connectors (E) and secure by tightening the ring (D).
6. Join the wiring kit (C) and power adaptor (B) together and secure by tightening the ring.
7. Insert the plug (A) into mains power socket outlet (not included) and ensure it is fully plugged in.
8. Turn power on at the mains power socket outlet to turn the lamp on/off.

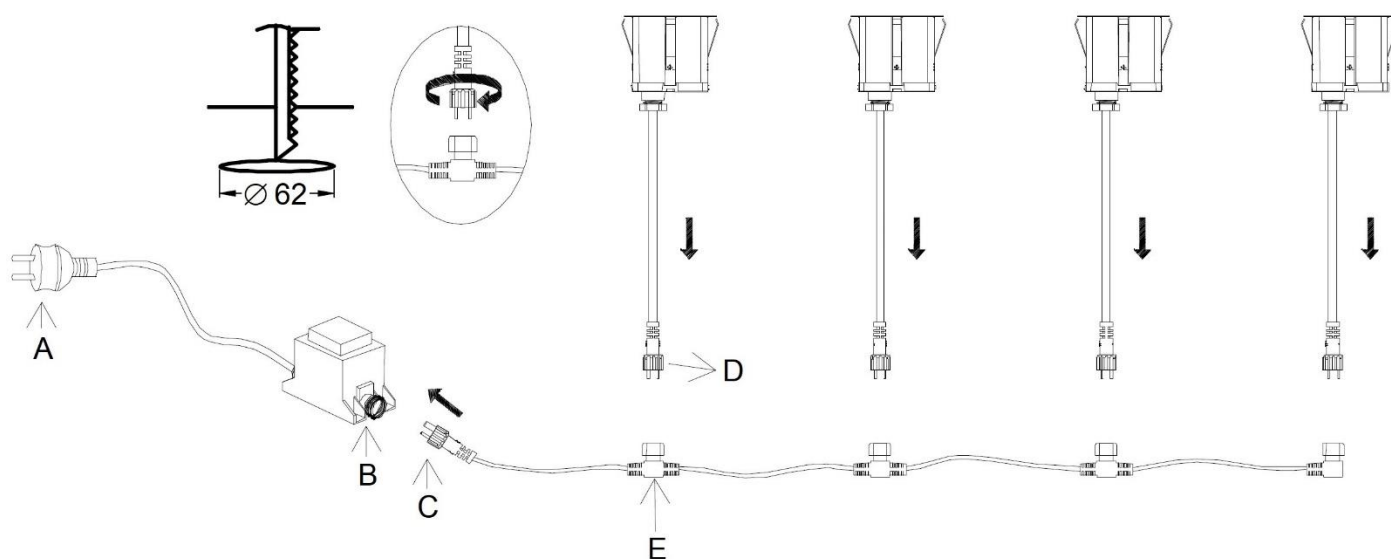

## Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or making any adjustment to the fitting.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- The LEDs are not replaceable and there are no serviceable parts, do not attempt to dismantle or open the product.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Handle the fitting and shade with care to avoid any damage or breakage.
- The fitting must not be used if the shade has been cracked or damaged. Replace any cracked protective shield.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

SKU #	220954	220956
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	7W Max. (including driver)	
LED Specs	240 lumens, 3000K Warm White, Non-dimmable	240 lumens, 4000K Cool White, Non-dimmable
IP Rating	IP65	
Cut-out Size	$\varnothing$ 62mm	
Weight	1.2kg	
Dimensions	H:48mm Dia:70mm	