

FESTOON SPEAKER

SKU# 220989

Rated Voltage 12VDC

**NOTE: This product can be DIY and does not require any electrical connection or disconnection.
When working with 240V, a licensed electrician is required.**

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This product is covered by a 5-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase for any warranty enquiries.
- This product is not suitable for use with dimmer switches. The warranty will be void if the product is used on the same circuit, which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements


- This product is designed to be used with a mains power socket outlet (not included).
The installation location must have an existing mains power socket outlet (not included) pre-installed.
If you don't have an existing mains power socket outlet (not included), please contact your licensed electrician.
- All wiring and installation of the product must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical installations. If unsure, please contact a licensed electrician.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the product.
 - This product is protected against water penetration to IP44 standards, which has protection against splashing water from all practicable directions.

NOTE: The plug-in power supply is rated IP44 and has protection against splashing water from any direction.

- Only use the supplied plug-in power supply with this product.
- The product must not be used if the protective shield has cracked. Replace any cracked protective shield before using the product.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the product has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the product is fully assembled and is ready to use for the first time.

Installation Directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
3. Using the hanging loops on product, hang the product onto hooks (not included) at preferred and suitable environment.
4. Connect the male connector to the plug-in power supply and tighten the bi-pin plugs.
NOTE: Only use the supplied plug-in power supply with this product.
5. Insert the plug-in power supply into mains power socket outlet (not included) and ensure it is fully plugged in.
NOTE: To maintain IP44 standards with plug-in power supply, socket outlet (not included) should also be IP44 rated.
Ensure all the lamp holders are equipped with bulb/speaker before turning ON to maintain IP standards.
6. Female connector can be used to connect an additional product. If unused, please make sure it has cover on it to maintain IP standards.
NOTE: Ensure the additional product does not exceed the rated power of the plug-in power supply.
7. Switch on the product and connect to Bluetooth of product named "S14 SPEAKER BULB SYNC" from your preferred device.
NOTE: Make sure the speaker bulbs are in middle of string light to avoid bad signals. Different sounds can be heard when the device is connected or disconnected from the speaker.
8. After connection, test sound, lighting functions and enjoy your new product.

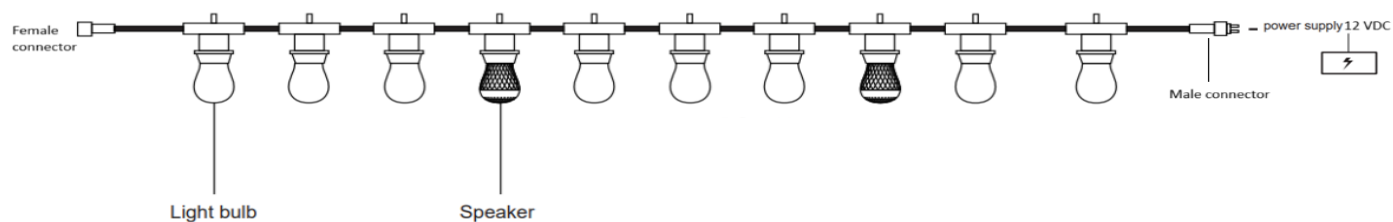

Safety Tips

- Always ensure the power is OFF and the product has cooled down before performing any maintenance, cleaning or making any adjustment to the product.
- To avoid injury or damage to the product, ensure that power leads and connectors are secure before connecting the power.
- To clean wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the product does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The external flexible cable or cord of this product cannot be replaced; if the cable or cord is damaged, the product shall be destroyed.
- The product must not be used if the protective shield has cracked. Replace any cracked protective shield before using the product again.

Specifications	
SKU #	220989
Rated Voltage	12 VDC
Rated Wattage	9W
LED lights	0.35W each, 230 lumens, 2700K- Warm white
Speaker rated wattage	6W (2 * 3W)
IP Rating	IP44 (product only) IP44 (plug-in power supply only)
Weight	1.1KG
Length	8m

NOTE: The plug-in power supply is rated IP44 and has protection against splashing water from any direction