

LED RIBBON 12V STRIP

SKU#229135, 229136, 229137, 229138, 229139, 229140

Rated Voltage 12V

NOTE:

This fitting is 12V extra-low voltage and can be DIY.

This installation instruction applies to the 12V side of the fitting only.

When working with 240V, a licensed electrician is required.

Lucci wiring kit (SKU# 220826, 220827) and Lucci transformer (SKU# 220818, 220819, 220829) sold separately.

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty


- This light fitting is covered by a 3 year warranty. The warranty is from date of purchase, not the date of installation. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting. Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This fitting is rated IP67 which is protected against immersed in water.
 - The Lucci wiring kit is not suitable for underground installation without protection from water or damp conditions. It is not designed to be immersed in water.
- Select a suitable location for installation, the mounting point must support 2 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the fitting.
3. Secure the LED strip to your preferred location by double sided tape or plastic anchorages.
4. Connect the LED strip (A) to Lucci wiring kit (B, not included) by tightening the Bi-pin plugs.
5. Connect the Lucci wiring kit to Lucci transformer (C, not included) by tightening the Bi-pin plugs.
6. Connect the Lucci transformer to the power socket indoors only.
7. You can cut the ribbon to your preferred length. Please ensure the IP rating is maintained if using glue to seal the end of the ribbon.

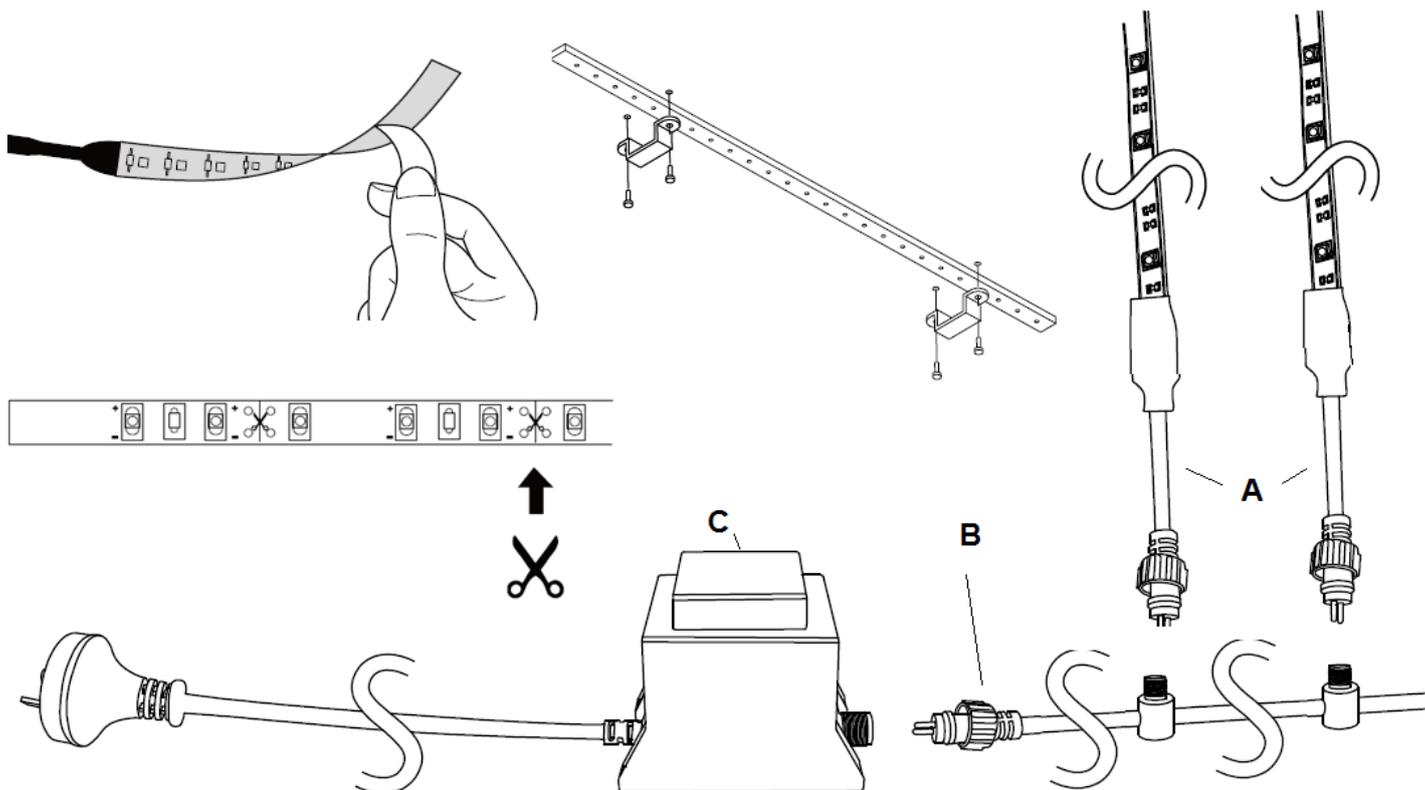

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.

Specifications

SKU #	229135	229136	229137	229138	229139	229140
Description	1M 12V LED STRIP WITH QUICK CONNECTOR		3M 12V LED STRIP WITH QUICK CONNECTOR		5M 12V LED STRIP WITH QUICK CONNECTOR	
Insulation Class	Class III					
Rated Voltage	12V					
Rated Wattage	8W		20W		26W	
LEDs	3000K, 350lm	4000K, 450lm	3000K, 850lm	4000K, 1000lm	3000K, 1200lm	4000K, 1400lm
Weight	0.17kg		0.24kg		0.33kg	
Dimensions	L:1000mm W:12mm D:4mm		L:3000mm W:12mm D:4mm		L:5000mm W:12mm D:4mm	
IP Rating	IP67		IP67		IP67	