

AURORA LED 4 LIGHT SPIKE KIT

SKU# 229320

Rated Voltage 220-240V~ 50/60Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep the instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase for any warranty enquires.
- The warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- The warranty will be void if the cabling is installed underground without suitable protection from water or damp conditions.
- This luminaire is not suitable for use with dimmer switches. The warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch. Dimming is done using the included remote or via the Lucci Connect App.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.


Installation Requirements

- This product can be DIY (Do It Yourself) and does not require any electrical connection or disconnection. It can be installed to the mains power socket outlet.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. e.g. AS/NZS 3000 Electrical installations. If unsure, please contact a licensed electrician.
- Select a suitable location for installation:
 - The luminaire, wiring kit, quick connectors and LED driver are protected against water penetration to IP65 Standards, which is against low-pressure jets of water from all practicable directions. This must be maintained during installation.
 - The remote is rating IP20, which is no protection from liquids or water. The remote will be susceptible to damage if it comes into contact with any liquids or water.
 - The wiring kit and quick connectors are not suitable for underground installation without protection from water or damp conditions. Ensure they are positioned in a location where the water can be easily drained away. They are not designed to be immersed in water.
 - The installation location may require a gravel substrate to help with water drainage, to prevent the wiring kit and quick connectors being submerged in water after heavy rain or from watering the garden.
 - Do not cover the LED driver in normal use.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the luminaire is fully assembled and is ready to use for the first time.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Select a suitable location for the luminaire, see the installation requirements on page 1. Ensure there is adequate space for the luminaire and wiring.
3. Connect the LED spikes to the wiring kit and connect the wiring kit to the LED driver. Ensure the quick connectors are fully tightened to maintain the IP65 rating.
4. Install the LED spikes into the ground.
5. Plug the LED driver into the mains power socket outlet and ensure it is fully plugged in.
6. Turn on the mains power socket output and either use the included remote (2x AAA batteries – not included) to control the luminaire or use the Lucci Connect App to connect and control the luminaire.

NOTE: This luminaire uses an IR remote, ensure to point the remote to the receiver on the LED driver as it requires line-of-sight to operate.

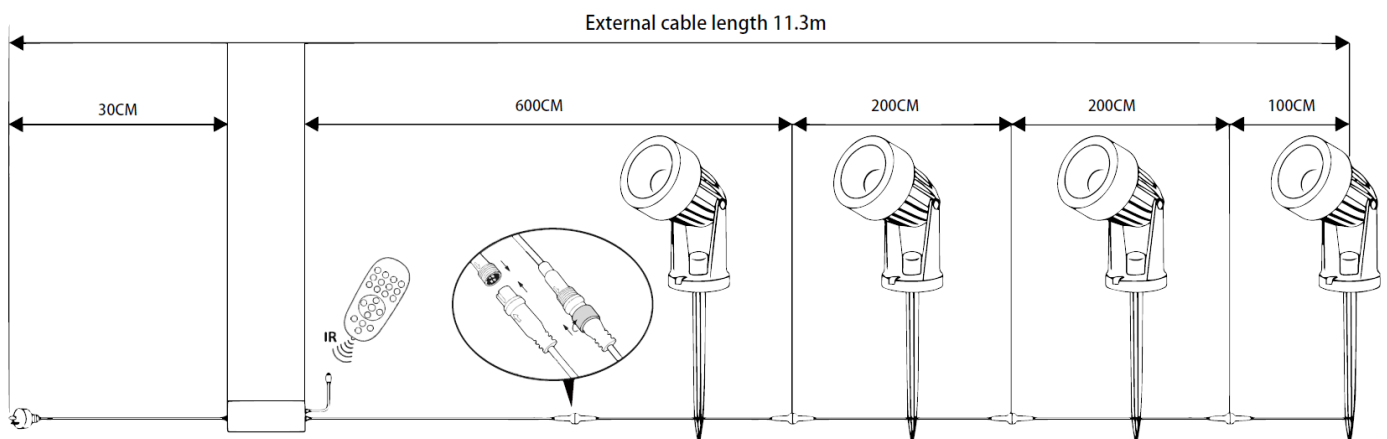

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Young children should be supervised to ensure that they do not play with the luminaire.
- Handle the luminaire and shade with care to avoid any damage or breakage.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Safety Precautions and Warnings for Battery

- **WARNING – KEEP BATTERIES OUT OF REACH OF CHILDREN.**
- If you suspect your child has swallowed or inserted a battery inside any part of the body, immediately call the Australian Poisons Information Centre on **13 11 26** for fast, expert advice, 24-hours, 7 days a week.
- Keep new, used or flat batteries away from children.
- Dispose of flat or used batteries immediately and safely (so they cannot be retrieved by children). Flat or used batteries can still be dangerous. Contact your local council to safely dispose of the battery.
- Regularly check the product and make sure the battery compartment is correctly secured. If the battery compartment does not close securely or has been cracked or damaged, stop using the product and keep it away from children.
- Battery Leaks: Battery contains chemicals and should be treated as any chemical would. Take precautions when handling leaked battery chemicals. Battery chemicals should not be placed near the eyes or ingested. Contact the Australian Poisons Information Centre on **13 11 26** for fast, expert advice, 24-hours, 7 days a week.
- Exhausted batteries are to be removed from the product.
- Batteries shall only be installed or replaced by an adult. Securely tight the battery box lid after replacement.
- Do not use rechargeable batteries in this product.
- The supply terminals are not to be short-circuited.
- Ensure the batteries are inserted with the correct polarity.
- Remove batteries from the product when not in use for long periods of time.

Specifications

SKU #	229320
Rated Voltage	220-240V~ 50/60Hz
Rated Wattage	20W
LED Driver	Input: 220-240V~ 50Hz Output: 24V DC, Max. 1.9A
LED Specs	100 lumens per head, CRI ≥ 80, Dimmable via remote or Lucci Connect App
Remote Specs	IR remote, 2x AAA batteries (not included)
IP Rating	IP65 for the luminaire, wiring kit, quick connectors and LED driver. IP20 for the remote.
Dimensions	H:132mm W:59mm L:95mm Max.