

ALCAZAR 4LT STREET LIGHT

SKU# 230927

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP23. This must be maintained during installation.
- Replace any cracked protective lamp shade to maintain IP rating when using this luminaire.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is rated against water penetration to IP23 standards, which is spraying water at an angle of up to 60°.
 - The installation structure, base, or surface must support 2 times the weight of the luminaire.
 - The mounting point must be a solid base, such as concrete. Where there is adequate drainage around the base ensuring water cannot collect around the base of the lamp post
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. Place the luminaire on a smooth non-scratch surface to help with assembly.
2. Loosen the decorative finial and remove the top cover. (Fig. A)
3. Install globes (not included) into the lamp holders. Do not exceed the maximum wattage rating. (Fig. B)
4. Install the upper post onto the middle post by twisting it clockwise. Install the middle post onto the lower post and secure by tightening the screws around the post. (Fig. C)
5. Install the lamp onto the top post by twisting it clockwise until it is secure. Take care not to cross thread or damage the internal wires. (Fig. D)
6. Use the triangle bracket to mark the location of the lamp post anchors. Ensure the lamp post anchors are installed into a solid base such as concrete and the triangle bracket is level. (Fig. E)

7. Remove the cover from the terminal box and connect the mains supply wire and the luminaire wires to the terminal block. (Fig. F)

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown

Luminaire Wire / Terminal Block

Yellow/Green or


Blue or N

Brown or L

8. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal box. (Fig. F)

9. Install the lamp post onto the lamp post anchor and secure by tightening the nuts. (Fig. F)

10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

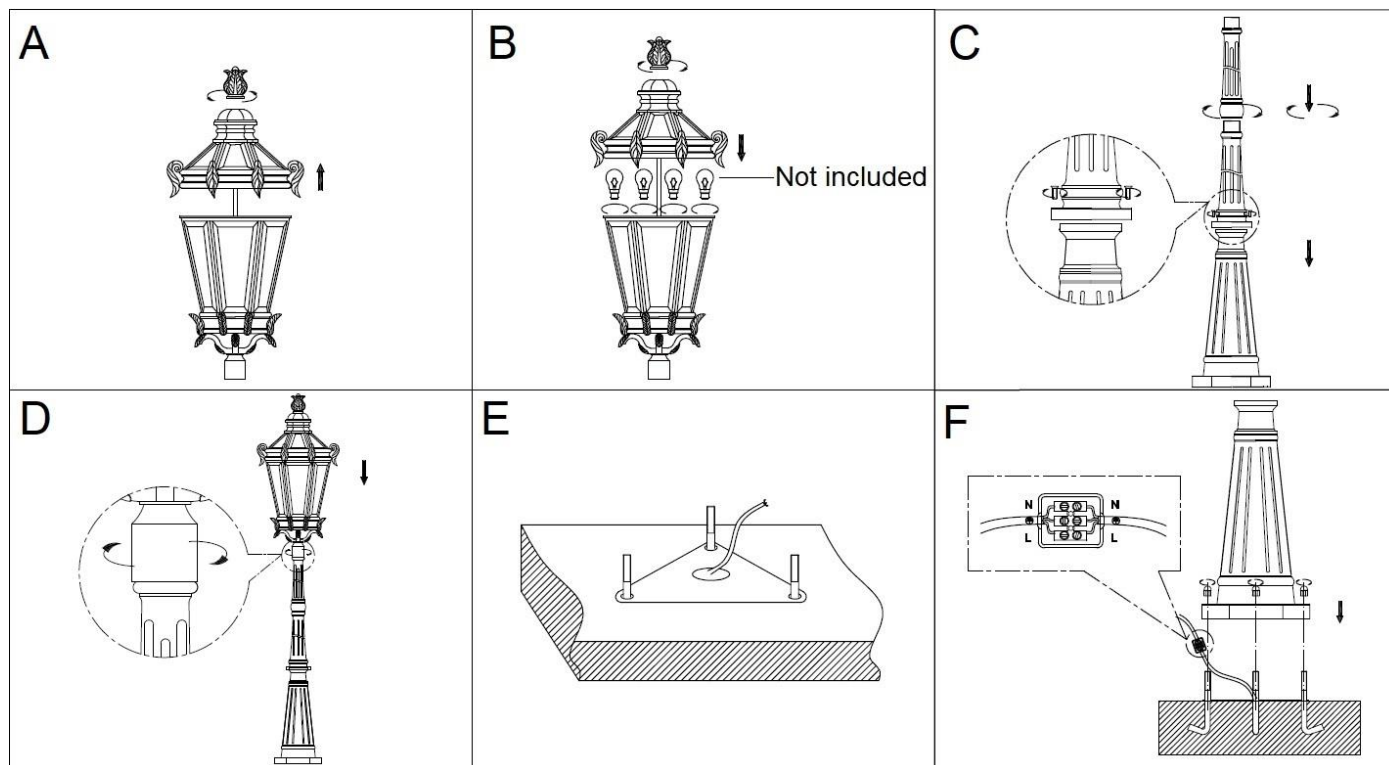

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications

SKU #	230927
Rated Voltage	220-240V~ 50Hz
Rated Wattage	240W Max. (4 x Max. 60W)
Lamp Holder	BC / B22
Weight	9.5kg
IP Rating	IP23
Dimensions	H:2410mm Dia:380mm