

SANTORINI SMALL EYELID BUNKER

SKU# 239651

Rated Voltage 220-240V~ 50Hz


To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP64 and must be maintained during wiring and installation.
- Do not exceed the maximum wattage rating.
- This luminaire must be used with a LED lamp only.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor or outdoor use.
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP64 standards, which is water splashing from any direction.
- If the diffuser is cracked or damaged. For your safety, discontinue use and replace the diffuser before using the luminaire again.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

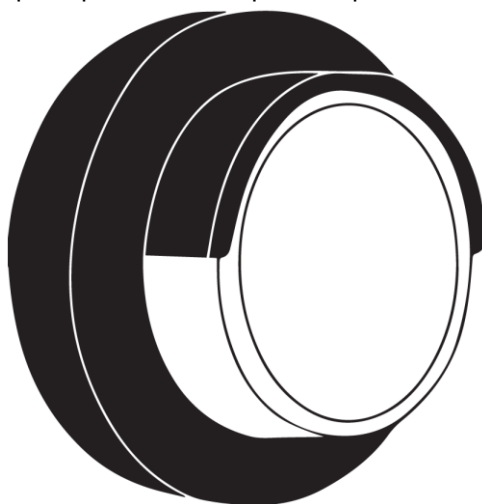

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

- 1. Remove the diffuser, washer and ring from the luminaire by loosening the 3 screws from the front of the luminaire.
- 2. Use the luminaire as a template to mark the 2 screw hole positions on the mounting surface.
- 3. Drill the 2 installation holes onto the mounting surface.
- 4. Feed the mains supply wire through the back of the luminaire.
- 5. Install the luminaire onto the mounting surface by using 2 appropriately sized mounting screws and anchors.
Ensure the 2 screws and anchors used are suitable for the mounting surface and the surrounding environment.


NOTE: A non-corrosive bead of silicon MUST be applied before installation onto the mounting surface, ensuring that no water can run down into the cabling and enter the luminaire.

- 6. Connect the mains supply wire to the earthing point on the luminaire body and the GX53 lamp holder.

Mains Supply Wire

Earth – Yellow/Green

Luminaire Body

 Earthing point on the luminaire

Mains Supply Wire

Neutral – Blue or Black

GX53 Lamp Holder

N

Live – Brown or Red

L



NOTE: The GX53 lamp holder terminals are not suited for loose strands or bare wires.



NOTE: Ensure the wire ends are crimped and there are no loose strands or bare wires.

NOTE: The GX53 lamp holder does not require specific polarity for the terminals.

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

- 7. Ensure the wires are secure and no bare wires are exposed.
- 8. Install the lamp holder onto the luminaire and secure using the 2 screws.
- 9. Install a GX53 LED lamp (not included) into the lamp holder. Do not exceed the maximum wattage rating.
- 10. Install the diffuser, washer and ring back onto the luminaire and secure by tightening the 3 screws at the front.
- 11. After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- If the diffuser is cracked or damaged. For your safety, discontinue use and replace the diffuser before using the luminaire again.

Specifications

SKU #	239651
Rated Voltage	220-240V~ 50Hz
Rated Wattage	10W Max. (LED lamp only)
Protection Class	Class I
Lamp Holder	GX53
IP Rating	IP64
Weight	1.0kg
Dimensions	H:68mm Dia:140mm