

CAPE 1LT WALL BRACKET

SKU# 239663, 239664, 239665

Rated Voltage 220-240V~ 50Hz


To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. e.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class II product and must be maintained during wiring and installation.
- This luminaire is rated IP65 and must be maintained during wiring and installation.
- Do not exceed the maximum wattage rating. This luminaire must be used with LED lamps only.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor or outdoor use.
 - This luminaire is suitable for ceiling or wall mount.
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is rated against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.
- If the diffuser is cracked or damaged. For your safety, discontinue use and replace the diffuser before using the luminaire again.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

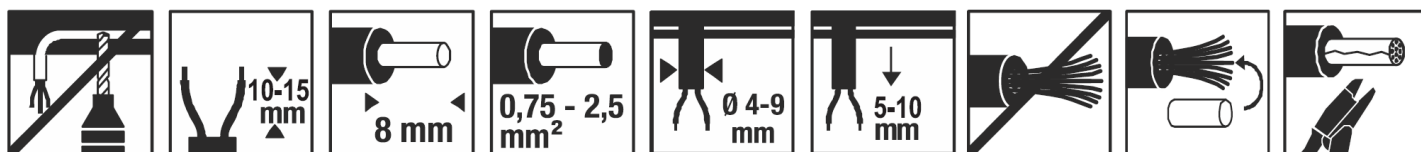

Installation Directions

- 1. WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.**
- Use the back part of the luminaire as a template to mark the screw hole positions on the mounting surface and drill the installation holes.



NOTE: Take care not to drill into any electrical wiring.

Feed the mains supply wire through the grommet on the back of the luminaire.



NOTE: The grommet is suitable for 4-9mm diameter sized cable.

Install the back part of the luminaire onto the mounting surface by using appropriately sized mounting screws and anchors.

Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.

NOTE: A non-corrosive bead of silicon MUST be applied before installation onto the mounting surface, ensuring that no water can run down into the cabling and enter the luminaire.

- Connect the mains supply wire to the terminal block.

Mains Supply Wire


Live – Brown or Red

Neutral – Blue or Black


Terminal Block

L


N




NOTE: Strip the wire so there is approximately 10-15mm basic insulation.



NOTE: Strip the wire so there is approximately 8mm bare strand.



NOTE: The terminal block is suited for 0.75mm² – 2.5mm² core cable.



NOTE: The cable length into the luminaire is approximately 5-10mm.



NOTE: The terminal block is not suited for loose strands or bare wires.




NOTE: Ensure the wire ends are crimped and there are no loose strands or bare wires.

NOTE: This luminaire is a Class II product and must be maintained during wiring and installation.

- Install the lamp holder assembly onto the back part of the luminaire and join the quick connector.
- Secure the lamp holder assembly onto the back part of the luminaire using the 2 screws.
- Install a GX53 LED lamp (not included) into the lamp holder. Do not exceed the maximum wattage rating.
- Install the diffuser over the GX53 LED lamp.
- Install the shade onto the luminaire body.

After the installation is complete, switch on the luminaire to test and enjoy your new lighting product.

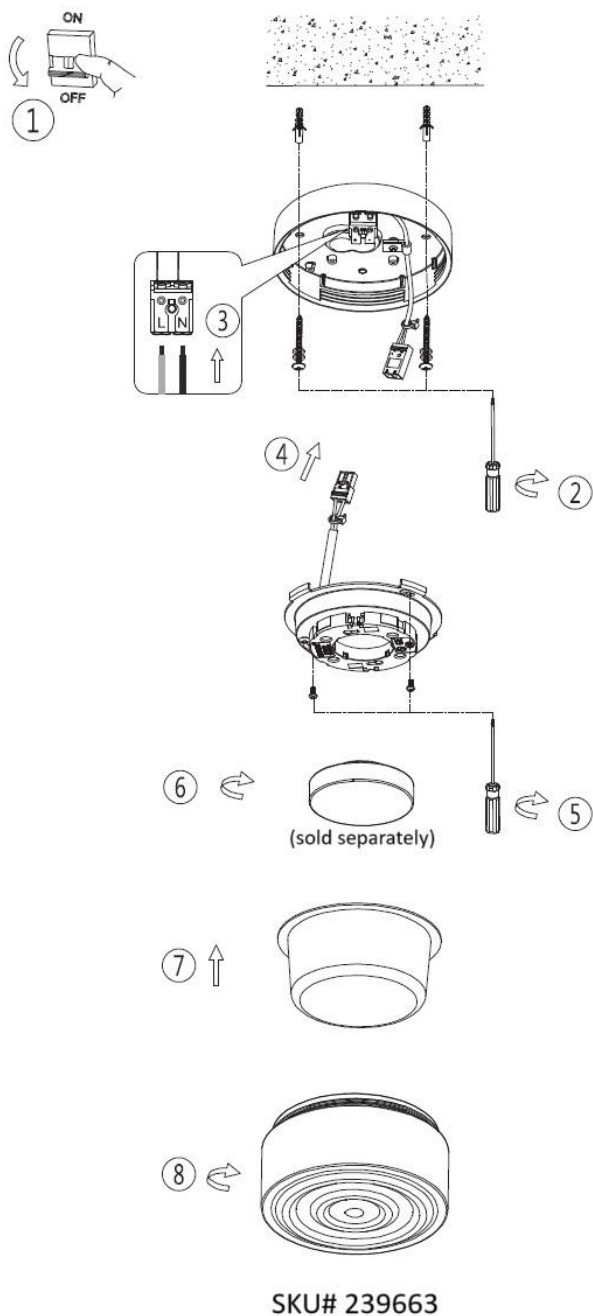

Decorative ring for interior use only
(sold separately)
SKU# 239666
SKU# 239667
SKU# 239668
SKU# 239669

**NOTE: The decorative ring (SKU# 239666, 239667, 239668, 239669) is sold separately.
The decorative ring is for interior use only.**

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or changing the lamp.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- If the diffuser is cracked or damaged. For your safety, discontinue use and replace the diffuser before using the luminaire again.

Specifications

SKU #	239663	239664	239665
Shade	Wave	Sawtooth	Flat
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	9W Max.		
Protection Class	Class II		
Lamp Holder	GX53		
IP Rating	IP65		
Weight	1.1kg		
Dimensions	H:78.5mm Dia:132mm		