

## City III LED Recessed Gimble CCT 92mm Cut Out Downlight in Brass


\$67.95

### DESCRIPTION

Elevate the ambience of your living space with the modern and stylish City III gimble downlight. Boasting a powerful lumen output of up to 1050, this downlight delivers ample brightness to illuminate any room effectively. With a versatile colour temperature range of 3000K, 4000K, or 5000K, you can adjust the lighting to suit your mood and environment. The 3CCT wall switch provides a hassle-free and convenient way to change the colour temperature. The City III gimble downlight is also dimmable, giving you complete control over the lighting level. Its IP40 rating ensures that it is protected against dust and water splashes after installation, making it ideal for areas such as bathrooms and kitchens. With a 5-year warranty included, you can be confident in the high-quality and durable lighting solution you are investing in. Choose the City III gimble downlight in white to add a touch of contemporary design and exceptional features to your living space. This downlight is also dimmable, giving you complete control over the lighting level. The IP40 rating ensures that the City III gimble downlight is protected against dust and water splashes after installation, making it perfect for areas such as bathrooms and kitchens. Additionally, this product comes with a 5-year warranty to ensure your satisfaction with your purchase, giving you peace of mind that you are investing in a high-quality and durable lighting solution. Choose the City III gimble downlight to elevate your living space with its exceptional features and contemporary design.

### SPECIFICATIONS

SKU	170767
Dimmable	Yes
Recommended Dimmers	Lucci LEDlux SKU# 290998, 290997, 299043, 290989, 290992, 290993, 290994. Buster + Punch SKU# 299098, 299099, 299100 299101. Artisan SKU#197015, 197016, 197017, 197018.
IP Rating	40
Globe Type	Integrated LED
Globe Quantity	0
Wattage Max	11.5W
Colour Temperature	Warm White/Cool White/Day Light
Kelvins	3000K/4000K/5000K
Lumens	1050
CRI	>90
Efficacy	91.3
Beam Angle	60 degrees
Field Angle	80 degrees
Average Rated Life	25,000 hours
Cut Out Size (mm)	92
IC (Insulation Contact) Rated	IC-4
Gimble Angle	65 degrees
Voltage	240V
Double Insulated	No
Sdcm	=6 (3000K/5000K) =7 (4000K)
Operating Temperature	-20 degrees to 40 degrees
Ambient Temperature	25 degrees
Height (mm)	63
Weight (kg)	0.4

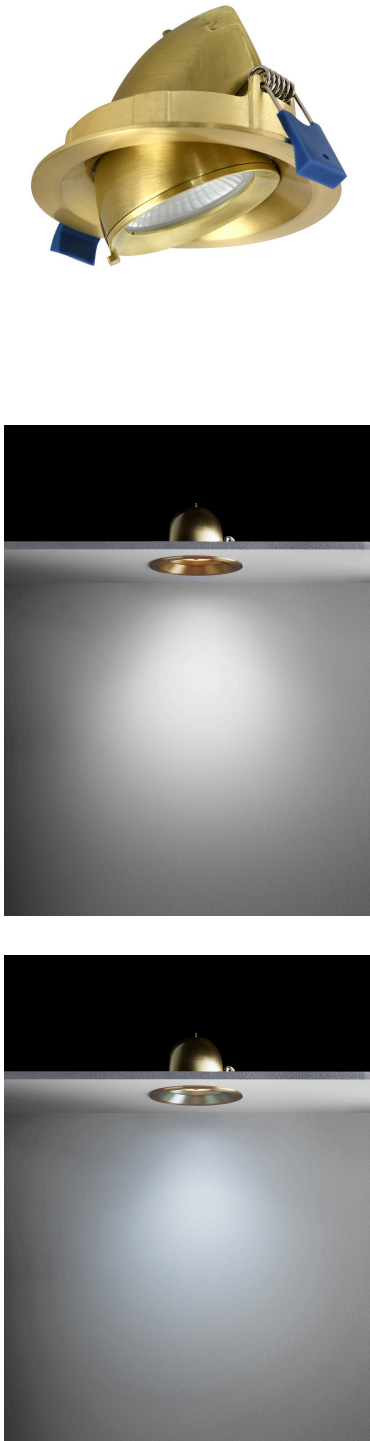



Brand	Lucci LEDlux
Globe Included	No
Product Type	Lighting
Width (mm)	100
Cable Length	500mm
Colour/Finish	Brass
Style	Modern

