

FIELD FLOOD LIGHT

SKU# 240920, 240922, 240924, 240926

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- This luminaire is not suitable for use with dimmer switches. Warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65; this must be maintained during wiring and installation
- Select a suitable location for installation:
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.
- The luminaire is not suitable to use with dimmer switches and must not be used with a circuit which has a dimmer.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface. (Fig. A)
3. Remove the mounting bracket from the luminaire by loosening the screws, flat washers, spring washers and nuts from the side with the supplied Allen Key. (Fig. B)

NOTE: Carefully place the screws, flat washers, spring washers and nuts aside, they are required to be re-installed later.

4. Use the mounting bracket as a template to mark the screw positions on the mounting surface. (Fig. C)
5. Install the mounting bracket onto the mounting surface by using appropriately sized mounting screws and anchors. Ensure the screws and anchors are suitable for the mounting surface and the surrounding environment. (Fig. D)
6. Install the luminaire back onto the mounting bracket and secure by tightening the screws, spring washers, flat washers and nuts to the side of the luminaire. (Fig. E)
7. Connect the mains supply wire to the luminaire. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal label

Yellow/Green or


Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during the wiring and installation.

NOTE: This luminaire is rated IP65; this must be maintained during wiring and installation.

8. After the installation is complete, turn the power to the circuit ON and test all the lighting functions of the luminaire before the licensed electrician leaves.

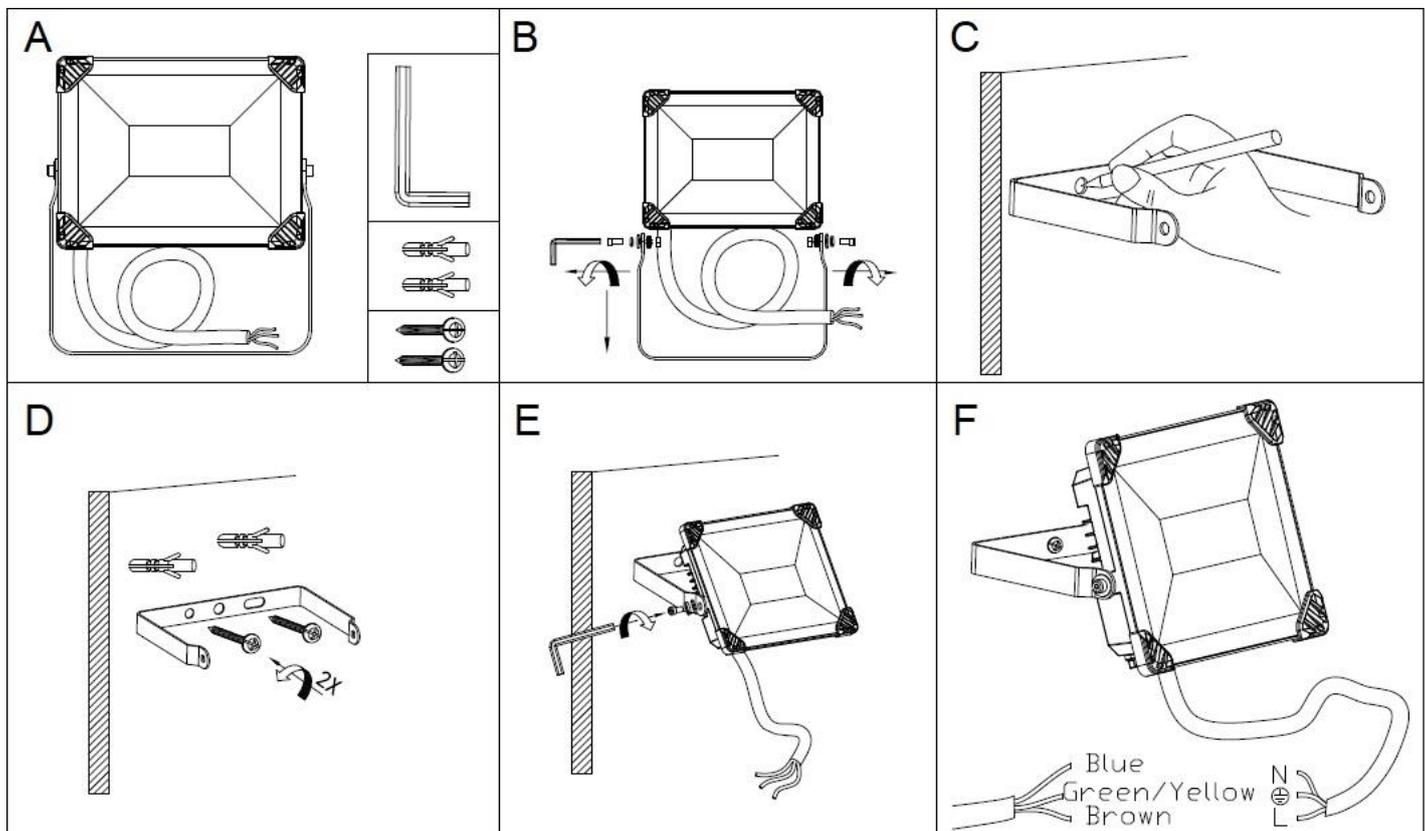

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged. Replace the protective shield or shade before using the luminaire.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.

Specifications

SKU #	240920	240922	240924	240926
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	10W	20W	30W	50W
LED Specs	Non-dimmable, 4000K Cool-White, CRI > 80			
Lumens	900 lumens	1800 lumens	2700 lumens	4500 lumens
IP Rating	IP65			
Weight	0.2kg	0.3kg	0.5kg	0.9kg
Dimensions	H:100mm W:115mm E:125mm MAX	H:115mm W:145mm E:130mm MAX	H:150mm W:190mm E:190mm MAX	H:180mm W:230mm E:245mm MAX