

NEBULAR FLOOD LIGHT

SKU# 240928, 240929

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- The luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP65 and must be maintained during wiring and installation of the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged.
- Select a suitable location for installation:
 - The mounting point must support 4 times the weight of the luminaire.
 - Mounting height must be less than 5m.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions. This must be maintained during wiring and installation.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair, or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

FIGURE A

Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


FIGURE B

1. Remove the mounting bracket from the luminaire by loosening the nuts on the sides.
2. Use the mounting bracket as a template to mark the screw hole positions on the mounting surface. Drill the holes on the mounting surface and install the plastic anchors into the mounting surface. Ensure the plastic anchors used are suitable for the mounting surface and the surrounding environment.
3. Install the mounting bracket onto the mounting surface by using appropriately sized mounting screws. Ensure the screws used are suitable for the mounting surface and the surrounding environment.
4. Install the luminaire back onto the mounting bracket by tightening the nuts to the side.
5. The Licensed Electrician MUST use a certificated terminal block (not included) with cord anchorages enclosed in an outdoor weatherproof junction box (not included) or connection gland (not included) to connect the mains supply wiring with the luminaire wires.

Mains Supply Wire

Earth – Yellow/Green
 Neutral – Blue or Black
 Live – Brown or Red

Luminaire Wire

Yellow/Green or 
 Blue or N
 Brown or L


Ensure that the wires are secure, and no bare wires are exposed.

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: The junction box (not included) or connection gland (not included) must be rated at least IP65 or above.

FIGURE C

After the luminaire has been fully installed, switch on the luminaire to test and enjoy your new lighting product.

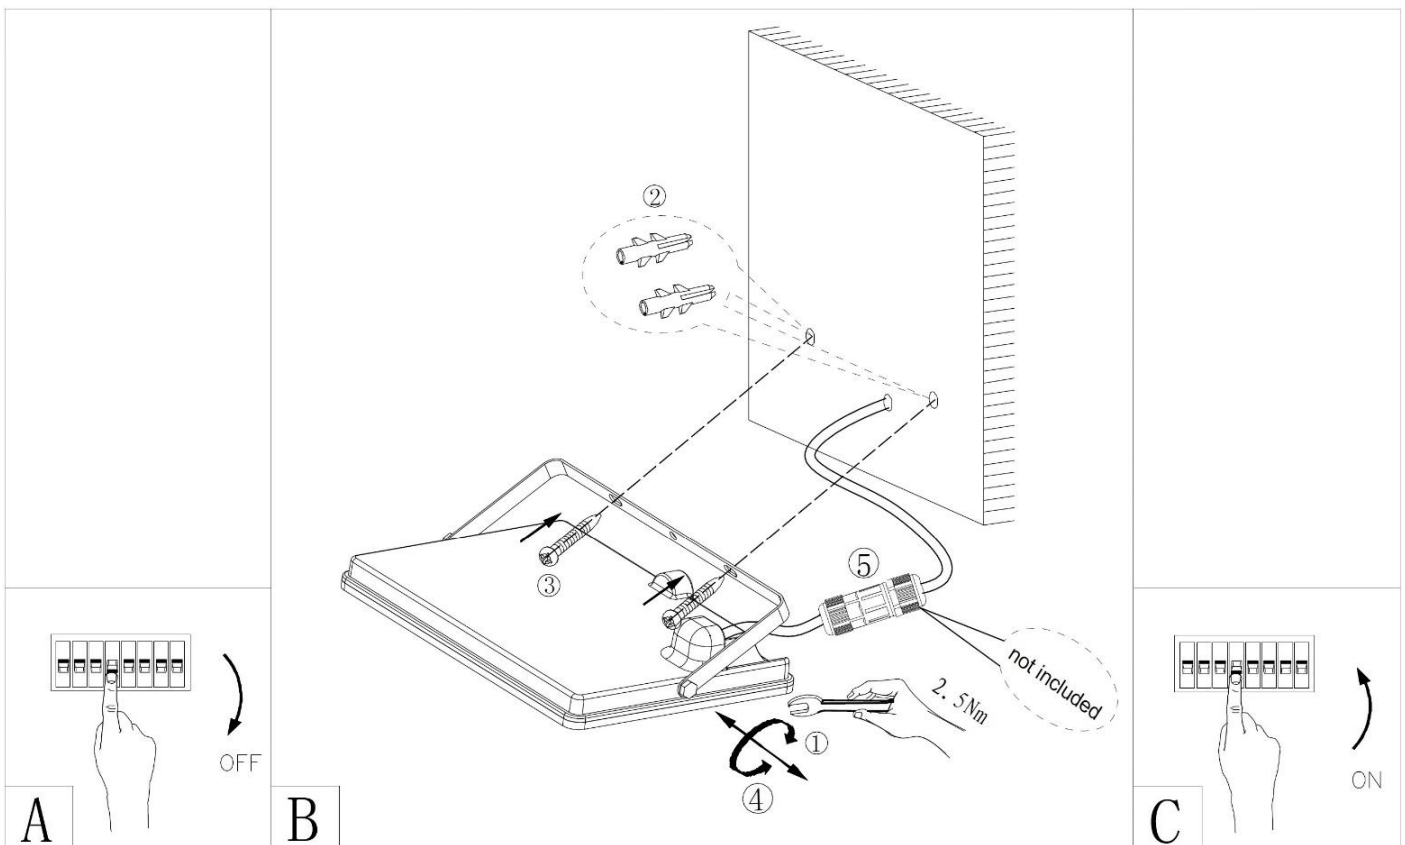

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- The luminaire must not be used if the protective shield or shade has been cracked or damaged.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.

Specifications

SKU #	240928	240929
Art. No.	205471	205472
Insulation Class	Class I	
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	31W	50W
LED Specs	3000 lumens, 5000K, Non-dimmable	4800 lumens, 5000K, Non-dimmable
Weight	0.5kg	0.6kg
Dimensions	H:135mm W:175mm E:150mm	H:145mm W:205mm E:165 mm MAX.
Projected Area	234.5cm ²	297.2cm ²
IP rating	IP65	
Mounting Height	≤5m	