

CURTIS TOUCH LAMP

SKU# 269500, 269501,269502

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep the instructions for future reference.

Warranty

- This portable luminaire is covered by a 12-month warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the portable luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Select a suitable location for this portable luminaire:
 - Ensure it is on a flat and stable surface.
 - This portable luminaire is suitable for indoor use only.
 - Do not place flammable material near or over the portable luminaire.
 - Ensure the portable luminaire is not installed in direct line of an air vent/system.
 - If the portable luminaire is placed in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- The touch switch has a minimum load of 20W. Ensure the globe used, has a minimum load of 20W.
- This luminaire can only be used with incandescent lamps, not compatible with self-ballast LED or CFL lamps.
- Do not exceed the maximum wattage rating.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket-outlet before or during assembly. Only do so after the portable luminaire is fully assembled with the globe installed and is ready to use for the first time.

Installation Directions

1. Remove all packaging material from the product.
2. Remove the lamp holder ring (B) from the lamp holder (D).
3. Install the shade (C) onto the base (E) and secure using the lamp holder ring (B).
4. Install an incandescent globe (A - not included) into the lamp holder (D). Do not exceed the maximum wattage rating.

NOTE: The touch switch has a minimum load of 20W. Ensure the globe used, has a minimum load of 20W.


NOTE: This luminaire can only be used with incandescent globes, it is not compatible with LED or CFL lamps.

5. Select a suitable location for the portable luminaire. See the installation requirements above.
6. Insert the plug (F) into the mains power socket outlet and ensure it is fully plugged in.
7. Turn the power on at the mains power socket outlet.
8. Touch the base (E) to turn the portable lamp on/off.

Operation of the USB charger:

You can charge your electronic device via the USB output on the base of the luminaire. The rated output is DC 5V 1A. (Refer to the instruction manual of your electronic device for the required charging current)

NOTE: If the charge current of your device is over the limit of the rated current, the charger will be self-protected. In this case, your device will not charge unless you reconnect according to the rated output.

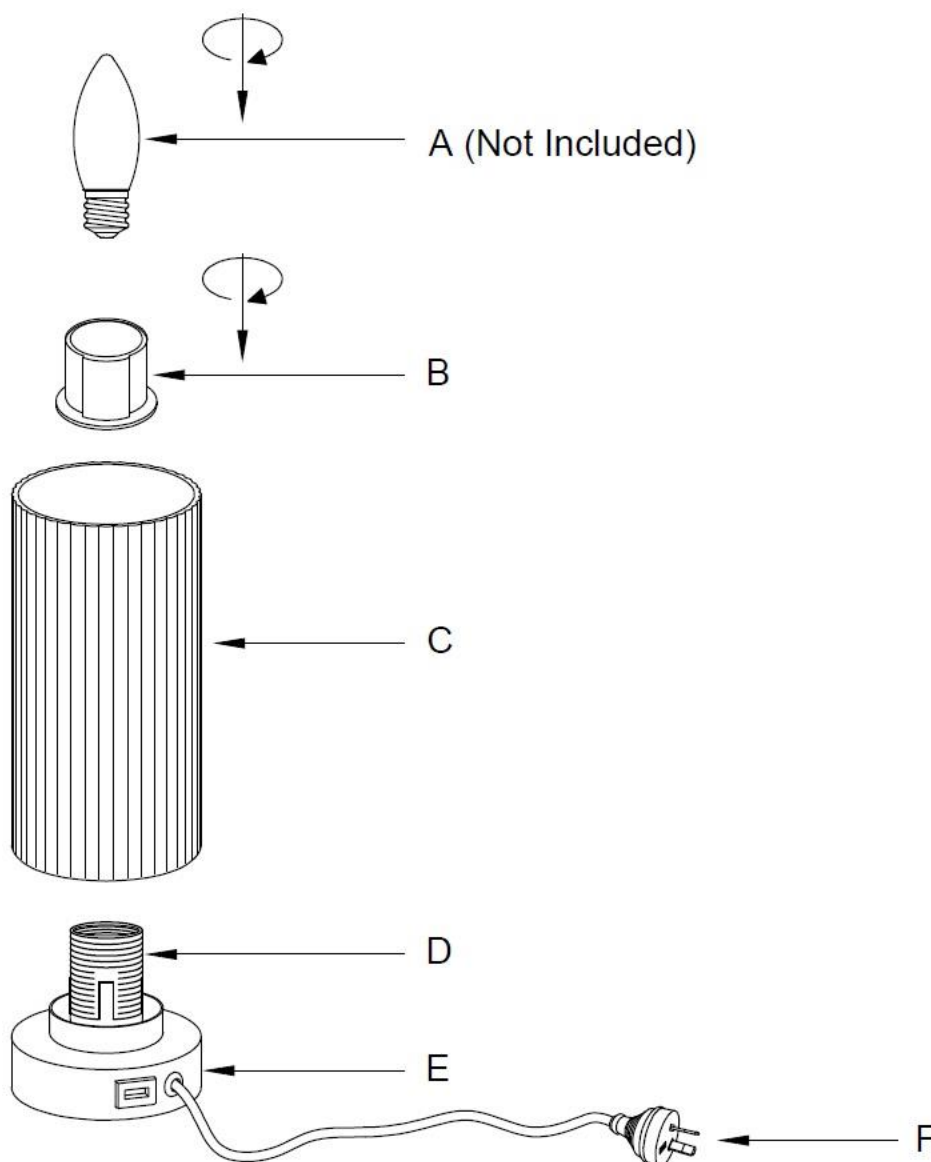

Safety Tips

- Always ensure the power is OFF and the portable luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the portable luminaire.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Young children should be supervised to ensure that they do not play with the portable luminaire.
- Handle the portable luminaire and shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the portable luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners, etc..

Specifications

SKU #	269500	269501	269502
Colour	Black with Smoke Glass Shade	Chrome with Opal Glass Shade	Aged brass finish with Opal Glass Shade
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	50W Max. (45W lamp + 5W USB charger) (Minimum lamp load 20W) (Incandescent globe only, not compatible with LED or CFL lamps)		
Lamp Holder	ES / E27		
Rated USB Output	5V 1A		
Weight	0.8kg		
Dimensions	H:240mm Dia:100mm		