

BELL CANOPY

SKU# 291015, 291016

Rated Voltage 220-240V~ 50Hz



NOTE: This product is not DIY. A licensed electrician is required for any assembly and installation.
This product is designed to be used in combination with pendant fittings which are sold separately.

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This product is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If this product is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. eg. AS/NZS 3000 Electrical installations.
- The maximum weight of the pendant (not included) to be suspended from the canopy is 3kg.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed in direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions



NOTE: This product is not DIY. A licensed electrician is required for any assembly and installation. This product is designed to be used in combination with pendant fittings which are sold separately.

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non-scratch surface.

Disassembly of existing pendant (sold separately) (Figure 1)

1. Take the existing pendant (A – not included) and loosen the luminaire wires at the terminal block and any earth wires.
2. Loosen the cord anchorage at the canopy and carefully remove the wires from the canopy.
3. Only the main wire and lamp holder (B) are required for connection to the new canopy

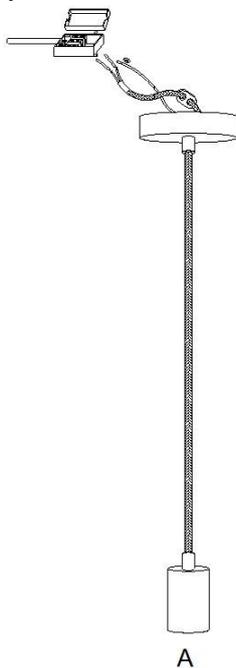


Fig. 1

Installation of the mounting bracket (Figure 2)

1. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
2. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws (F) and anchors (A). Ensure the screws (F) and anchors (A) used are suitable for the mounting surface and the surrounding environment.

Connection to new canopy (Figure 2)

1. Place a small piece of heat shrink tube onto the luminaire wire, this will be used later at the cord anchorage (I) on the new bell canopy.
2. Insert the luminaire wires into the new bell canopy.
3. Insert the restrainer (D) onto the luminaire wire.
4. Determine the desired suspension length of your pendant and tighten the screw at the cord anchorage (I). Ensure the heat shrink tube is located at the screw of the cord anchorage (I), this is to provide extra friction and also protect the cord from damage. Do not overtighten the screw and damage the luminaire wires.
5. Using the ring (G) hand the pendant onto the mounting bracket (B)
6. Connect the mains supply wire, luminaire wires and the earth cable from the canopy to the terminal block (C). Ensure the wires are secure and there are no bare wires are exposed

Mains Supply Wire

Earth (Yellow/Green)
 Neutral – Blue or Black
 Live – Brown or Red

Luminaire Wire

Yellow/Green or 
 Blue or N
 Brown or L

7. Push the bell canopy (E) up so it is flush against the ceiling and hold into position by tightening the screw (H)
8. After the installation, switch on the luminaire to test and enjoy your new lighting product.

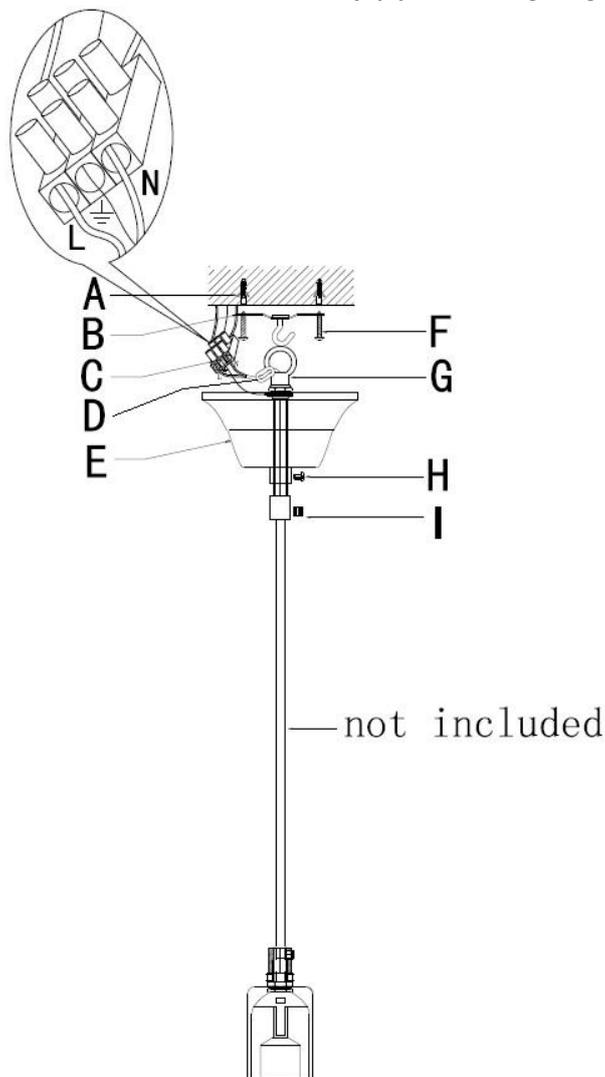


Fig. 2

NOTE: The maximum weight of the pendant (not included) to be suspended from the bell canopy is 3kg

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

Specifications

SKU #	291015	291016
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	Refer to original pendant for maximum wattage rating	
Max. Suspended Weight	The maximum weight of the pendant (not included) to be suspended from the bell canopy is 3kg	
Canopy Dimensions	H:140mm Dia:110mm	