

## LEDlux Foro

SKU# 300866, 300867, 300868

Rated Voltage 100-240V~ 50-60Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

### Warranty

- This light fitting is covered by a 3 year warranty. Please retain proof of purchase and evidence of installation by a licensed electrician.
- If the fitting is not installed by a licensed electrician it will void the warranty.
- This fitting is not suitable for use with dimmer switches. Warranty will be void if the fitting is used on the same circuit which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.  
eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This is a Class II fitting and must be maintained during installation.
- Select a suitable location for installation;
  - This product is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the fitting.
  - Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
  - Ensure there is sufficient clearance to allow cooling for the LED driver. A minimum depth of 55mm is required.
  - Ensure there is no thermal insulation, loose fill insulation, loose combustible materials near or covering the fitting inside the wall. If there is, a barrier or guard is required to prevent anything from covering the fitting.
- This light fitting is not suitable for use with dimmer switches and should not be used with a circuit which has a dimmer switch.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation directions

1. Remove all packaging material from the product.
2. Select a suitable place for installation and check on the wall type requirements for mounting depth, wall thickness and cut out size. Take note of the mounting surface. Type A is for soft wall types. Type B is for solid wall types.
3. Cut out a rectangle installation hole of 65mm x 110mm.
4. Connect the mains supply wire to the LED input terminals. **NOTE:** There is no polarity for the LED input terminals. Ensure the wires are secure and no bare wires are exposed.

#### Mains Supply Wire

Neutral – Blue or Black


Live – Brown or Red

#### LED input terminals

~

~

5. Push the clips in and insert the fitting into the cut out hole.

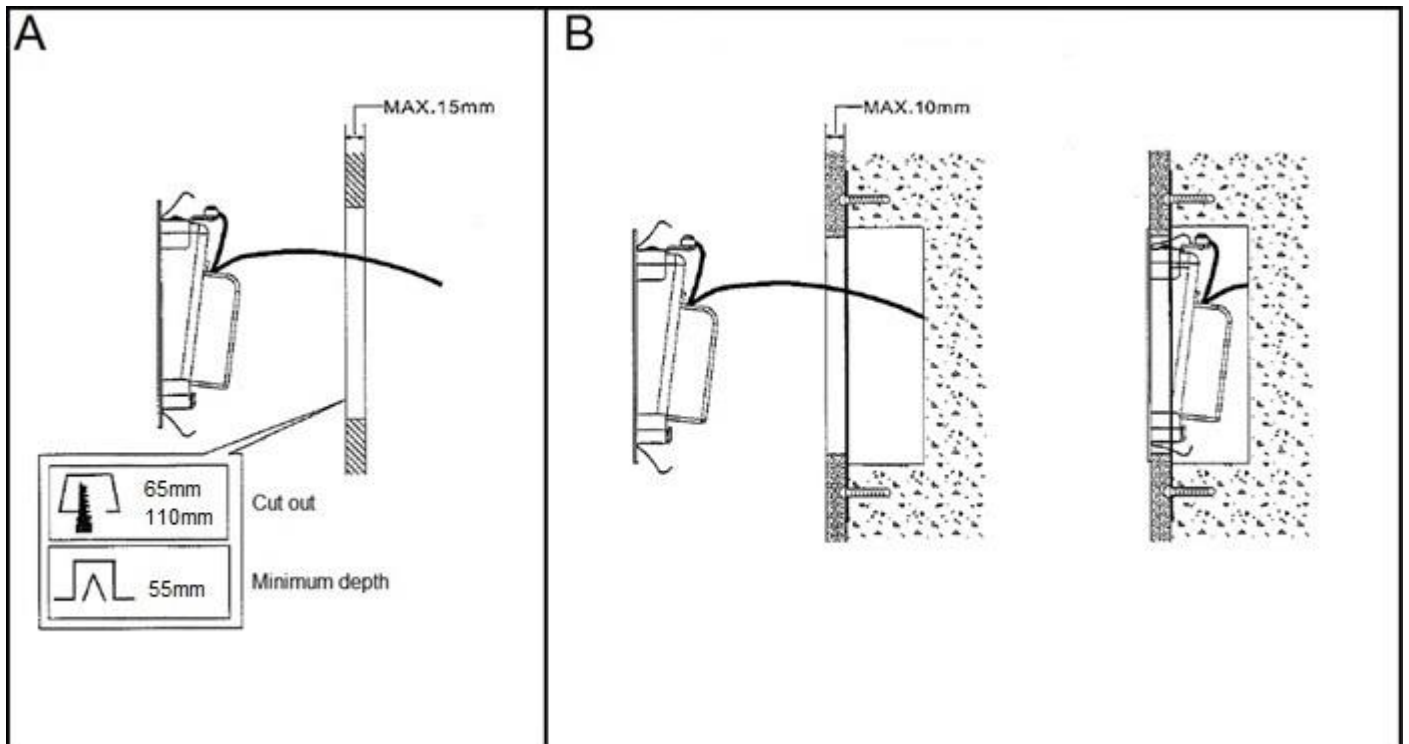

## Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Young children should be supervised to ensure that they do not play with the fitting.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

## Specifications

SKU #	300866	300867	300868
Model #	1503B/WH	1503B/WB	1503B/WC
Rated Voltage	100-240V~ 50-60Hz		
Rated Wattage	4.5W (including driver)		
LED details	Sharp LED, 3000K, 125 lumens		
Cut Out Size	65mm x 110mm		
Weight	0.2kg		
Dimensions	H:120mm W:80mm D:47mm		