

HOXTON 1 LIGHT WALL BRACKET

SKU# 309310, 309311

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
e.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.

NOTE: Cables or wires of different voltage systems (e.g. Low Voltage and SELV), MUST be separated by double insulation.

NOTE: Ensure the mains supply wire connection to the terminal block is double insulated.

- Do not exceed the maximum wattage rating.
- Follow the mounting directional label during installation.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the luminaire (F) by loosening the screws (C).
3. Use the mounting bracket (B) as a template to mark the screw positions on the wall.

NOTE: Follow the mounting direction label on the luminaire.

4. Install the mounting bracket (B) onto the wall by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
5. Connect the mains supply wire to the terminal block (E). Ensure the wires are secure and no bare wires are exposed

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown

Luminaire Wire/Terminal Block

Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during the wiring and installation.

NOTE: Cables or wires of different voltage systems (e.g. Low Voltage and SELV), MUST be separated by double insulation.

NOTE: Ensure the mains supply wire connection to the terminal block is double insulated.

NOTE: After the mains supply wire is connected to the terminal block, you may need to wrap the terminal block with heat shrink wrap or electrical tape to provide the double insulation between the different voltage systems.

6. Install the luminaire (F) onto the mounting bracket (B) and secure by tightening the screws (C).
7. Remove the lamp holder ring (I) from the lamp holder (J).
8. Install the shade (H) onto the lamp holder cup (K) and secure by tightening the lamp holder ring (I) back onto the lamp holder (J).
9. Install a LED globe (G - not included) into the lamp holder (J). Do not exceed the maximum wattage rating.

NOTE: This luminaire must use a LED Fancy Round or LED Candle globe only.

10. Use the toggle switch (L) to turn the luminaire ON or OFF.


OPERATION OF THE USB CHARGER:

You can charge your device via the USB output (M) on the luminaire.

The rating of the USB output is: USB-C, 5VDC/3.0A, 9VDC/2.2A, 12VDC/1.66A, Max 20W.

Refer to the instruction manual of your electronic device for the required charging current.

NOTE: If the charge current of your device is over the limit of the rated current, the charger will be self-protected. In this case, your device will not charge unless you reconnect according to the rated output.

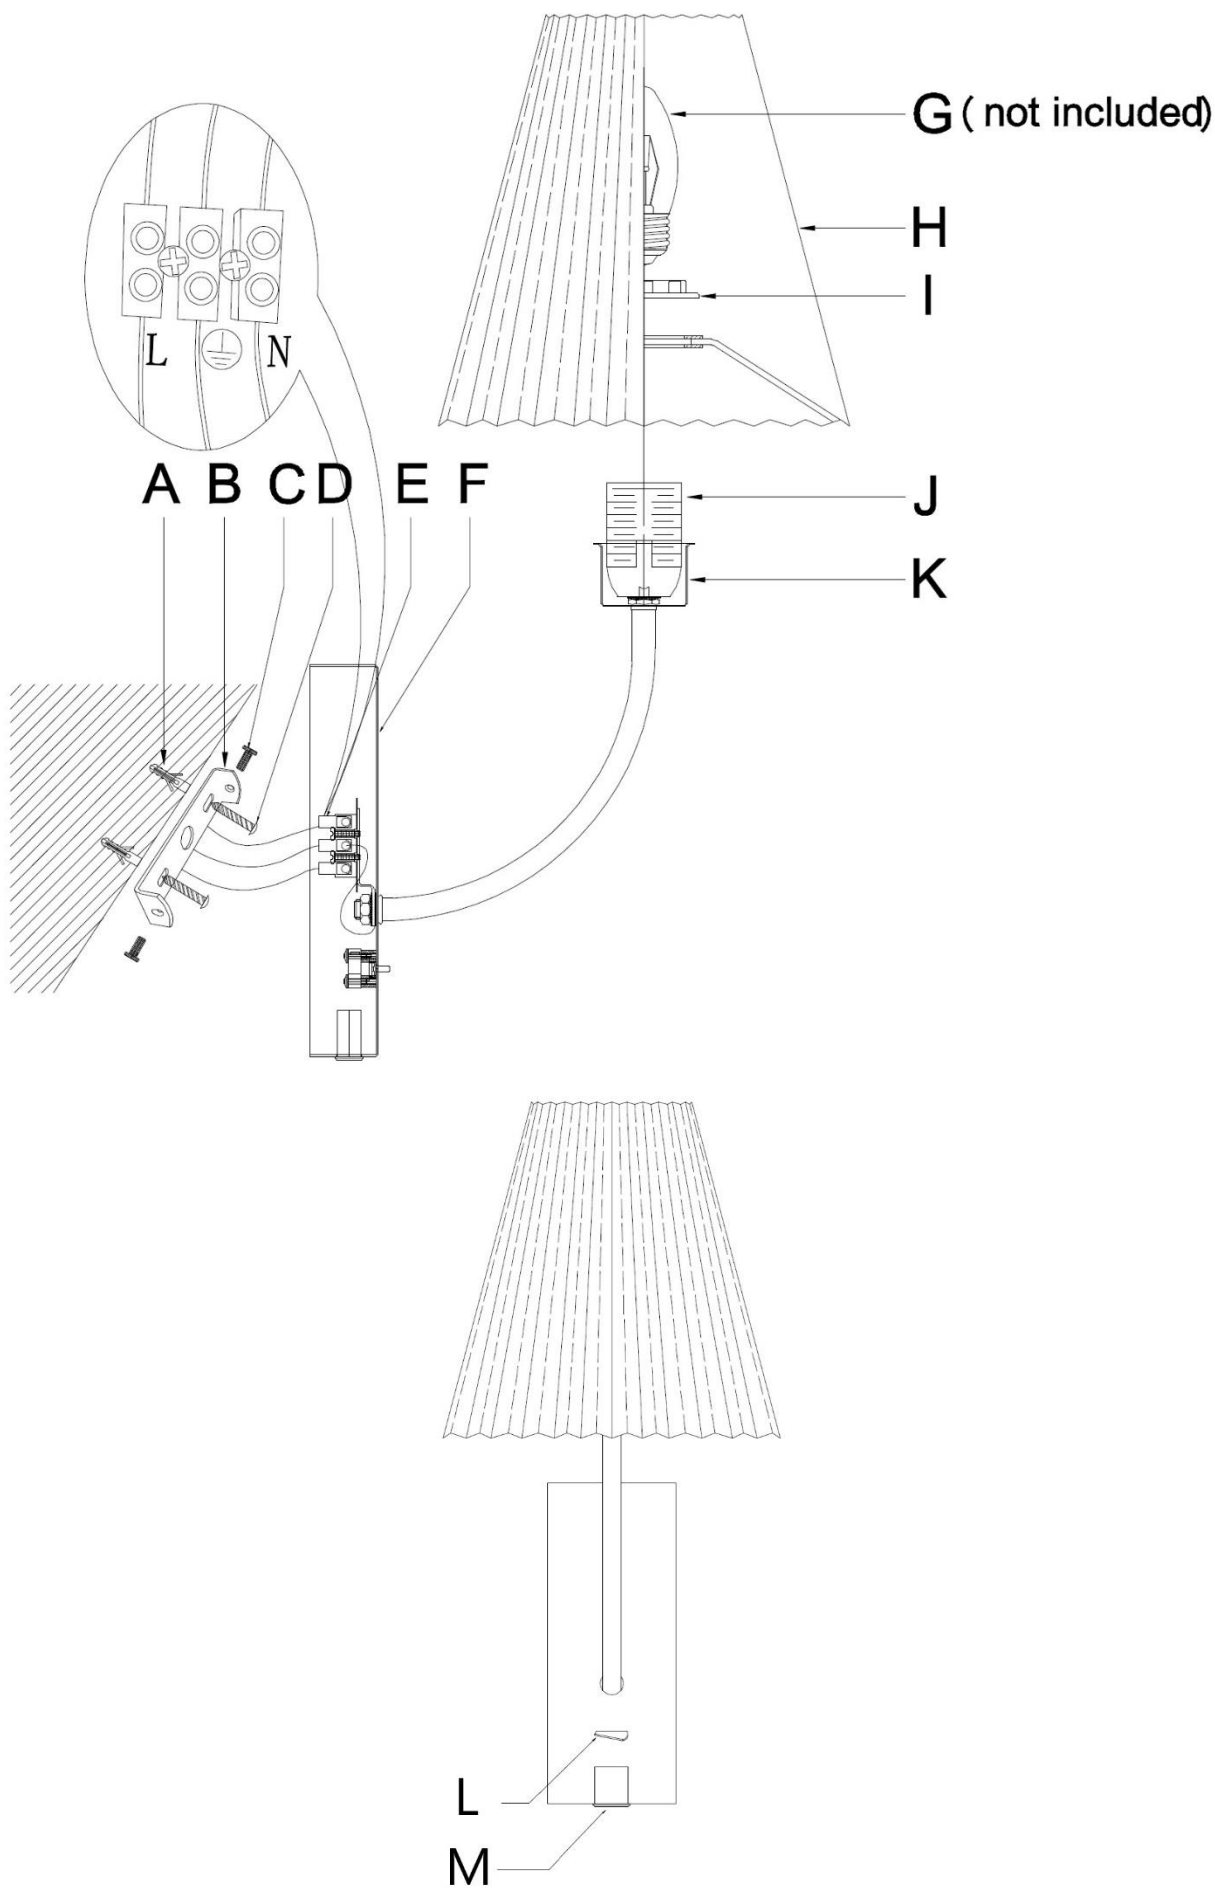

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications

SKU #	309310	309311
Colour	Aged Brass Finish / White Linen	Bronze Finish / Natural Linen
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	Total 30W Max (Globe: 10W Max + USB Charger: 20W Max).	
USB Charger	USB Type-C, Max 20W. 5VDC/3.0A, 9VDC/2.2A, 12VDC/1.66A,	
Lamp Holder	ES / E27 (LED Fancy Round or LED Candle globe only)	
Weight	0.7kg	
Back Plate Dimensions	H:30mm L:200mm W:80mm	
Luminaire Dimensions	H:430mm W:210mm E:285mm	