

## Sentinel

SKU# 220307

Rated Voltage 12V

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

NOTE: This fitting is 12V extra-low voltage and is DIY.

Do not plug this fitting directly into 240V.

This installation instruction applies to the 12V side of the fitting only.

The Lucci wiring kit (SKU# 220826, 220827), Lucci transformer (SKU# 220829, 220819, 220818) and globe are all sold separately.

### Warranty


- This fitting is covered by a 12 month RTB warranty from the date of purchase. Please retain proof of purchase.
- The warranty is subject to the fitting being used with the Lucci wiring kit (sold separately) and the Lucci transformer (sold separately).
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- Select a suitable location for installation;
  - A clearance of 0.2m must be kept between the globe and the nearest wall or object etc.
  - This fitting is protected against water penetration to IP65 standards, which is jets of water from any direction.
- Do not exceed the maximum wattage rating.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation directions

1. Remove all packaging material from the product.
2. Remove the front cover from fitting and install a globe (not included). Do not exceed the maximum wattage rating.
3. Install the front cover back onto the fitting.
4. Select a suitable location for installation. See the installation requirements above.
5. Use the quick connector from the fitting to join with the Lucci wiring kit (sold separately) and/or directly to the Lucci transformer (sold separately).
6. Ensure all quick connectors are done up tightly.
7. The fitting, quick connectors, Lucci wiring kit (sold separately) and Lucci transformer (sold separately) are not designed to be immersed in water. Ensure adequate drainage so the water does not "pool" around the fitting or parts.

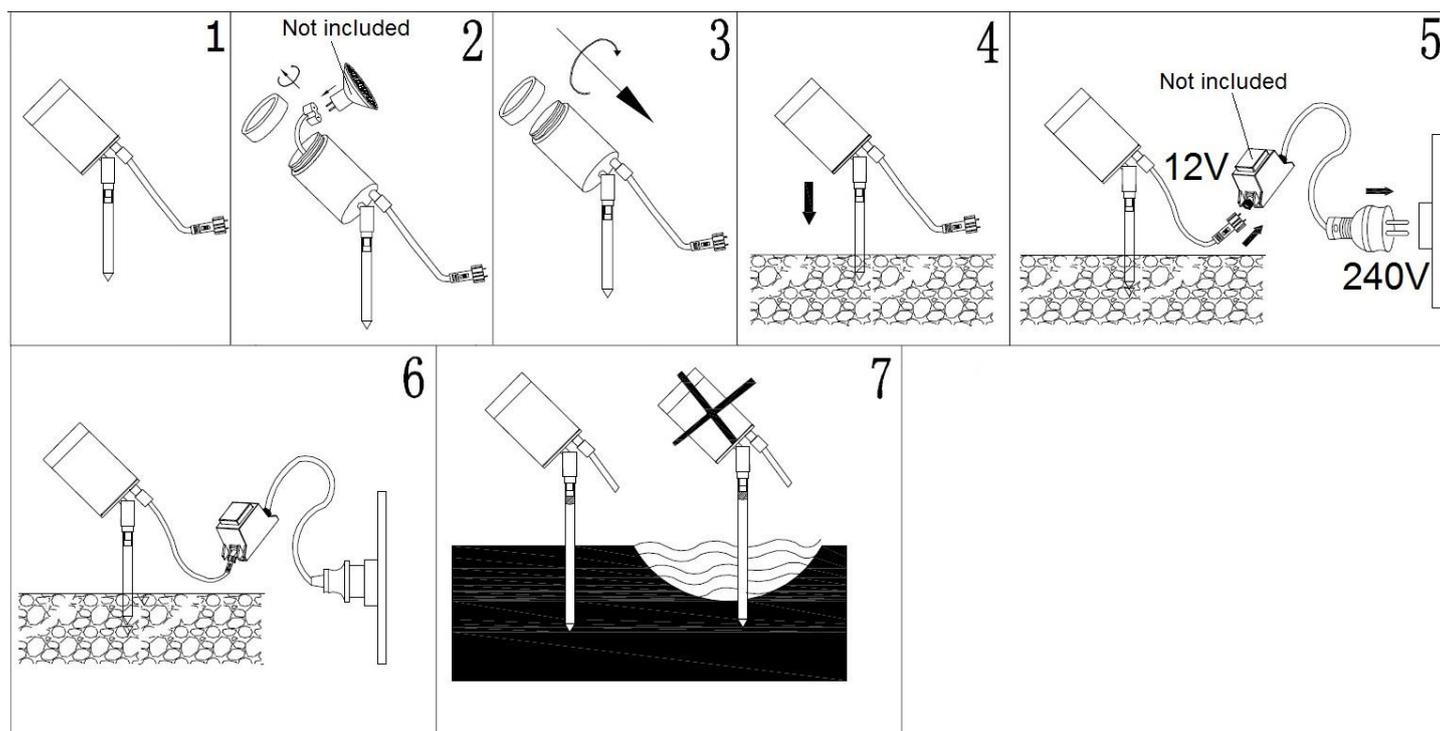

## Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

## Specifications

SKU #	220307
Rated Voltage	12V
Rated Wattage	35W MAX
Lamp Holder	G5.3
IP Rating	IP65
Weight	0.5kg
Dimensions	H:250mm Dia:62mm