

## SENTRY UP/DOWN WALL BRACKET

SKU# 230301

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void
- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation Requirements

- This fitting must be assembled and installed by a licensed electrician.
- All wiring and installation of the fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This is a Class I fitting and must be earthed.
- This fitting is rated IP44. This must be maintained during installation.
- Select a suitable location for installation;
  - This product is suitable for either indoor or outdoor use.
  - The mounting point must support 2 times the weight of the fitting.
  - This fitting is protected against water penetration to IP44 standards, which is splashing water from every direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Remove the mounting bracket (B) from the fitting (H) by loosening the screws (E).
3. Use the mounting bracket (B) as a template to mark the screw positions on the wall.
4. Install the mounting bracket (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
5. Insert the mains supply wire through the plastic grommet on the mounting bracket (B).

**NOTE: It is recommended that a non-corrosive bead of silicone be applied before installation to ensure no water can run down the cable and into the fitting.**

6. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure and no bare wires are exposed.

#### Mains Supply Wire

Earth – Yellow/Green   
 Neutral – Blue or Black  
 Live – Brown or Red


#### Fitting Wire

Yellow/Green or   
 Blue or N  
 Brown or L

7. Install the fitting (H) back onto the mounting bracket (B) and secure by tightening the screws (E).
8. Remove the shades (F) from the fitting (H).
9. Install globes (G - not included) into the lamp holders. Do not exceed the maximum wattage rating. Energy saving LED or CFL globes recommended.

# Installation Instructions

10. Install the shades (F) back onto the fitting (H) and check all parts are secured tightly.
11. After the installation, switch on the fitting (H) to test and enjoy your new lighting product.

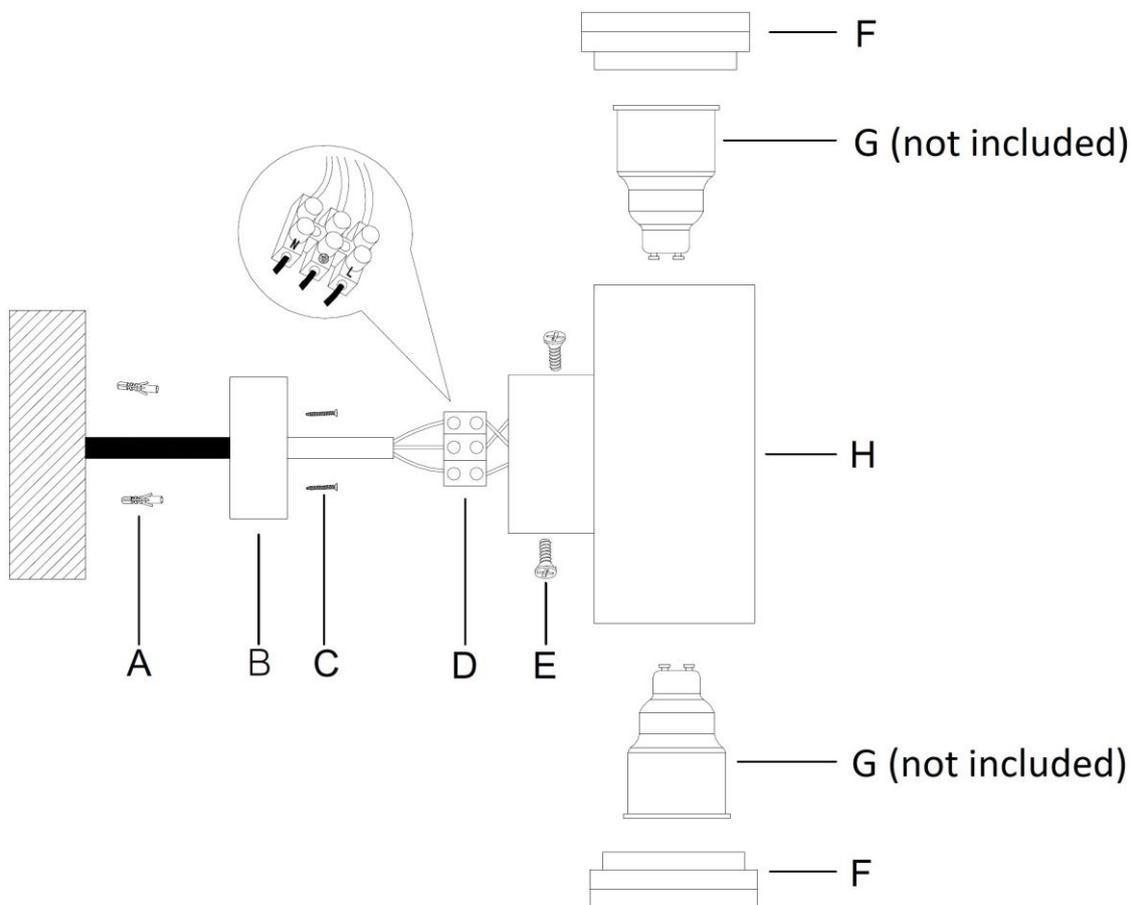

## Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- The fitting must not be used if the shade has been cracked. Replace any cracked protective shield.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.

## Specifications

SKU #	230301
Rated Voltage	220-240V~ 50Hz
Rated Wattage	22W Max. (2 x Max. 11W) (Energy saving LED or CFL globe recommended)
Lamp Holder	GU10
IP Rating	IP44
Weight	0.6kg
Dimensions	H:205mm W:76mm E:105mm