

LEXICON DIY BATTEN FIXTURE

SKU# 090750, 090751, 090752

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- This luminaire is a DIY (Do It Yourself) product, no electrical wiring connection or disconnection is required. The service of a licensed electrician is not required.
- This luminaire is designed to be used with a batten holder (not included). The installation location must have an existing batten holder (not included) pre-installed. If you don't have a batten holder (not included), please contact your licensed electrician.
- Ensure the existing batten holder is in good working condition and the plastic has not become cracked or brittle.
- This product is suitable for indoor use only.
- Do not exceed the maximum globe wattage rating after the installation of this DIY product.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the batten holder you are working on has been switched OFF before commencing the installation.


Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Remove the batten cover (B) from the canopy (F) by loosening the screws (D) on the sides.
3. Remove the batten holder skirt (C – not included) from the batten holder (A – not included).
4. Install the batten cover (B) over the batten holder (A – not included) and secure with the batten holder skirt (C – not included).
NOTE: Ensure the batten holder skirt (C – not included) and the batten cover (B) are attached securely. Check that it has taken up at least 2-3 full threads while attaching the batten holder skirt (C – not included) to the batten holder (A – not included).
5. Install the bayonet adaptor (E) into the batten holder (A – not included).
6. Install the canopy (F) over the batten cover (B) and secure by tightening the screws (D) on the sides.
7. To adjust the suspension length, loosen the cord anchorage (G) and carefully push the cord (H) into the canopy (F). Re-tighten the cord anchorage (G) after adjusting the suspension length. Take care not to overtighten the cord anchorage (G) [as this may](#) damage the cord.
8. Install the shade (K) on the main body (I) [and secure using the lamp holder cover \(L\)](#) [and the decorative ring \(M\)](#). Alternatively, install the decorative ring (O – sold separately SKU# 011676, 011677, 011678, 011679) followed by the shade (K) [and secure using the lamp holder cover \(L\)](#).

NOTE: This luminaire is only compatible with the following shades (sold separately):

SKU# 011664, 011665, 011666, 011667, 011668, 011669, 011673, 011674, and 011675.

9. Install a globe (N - not included) into the lamp holder (J). Do not exceed the maximum wattage rating.
10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

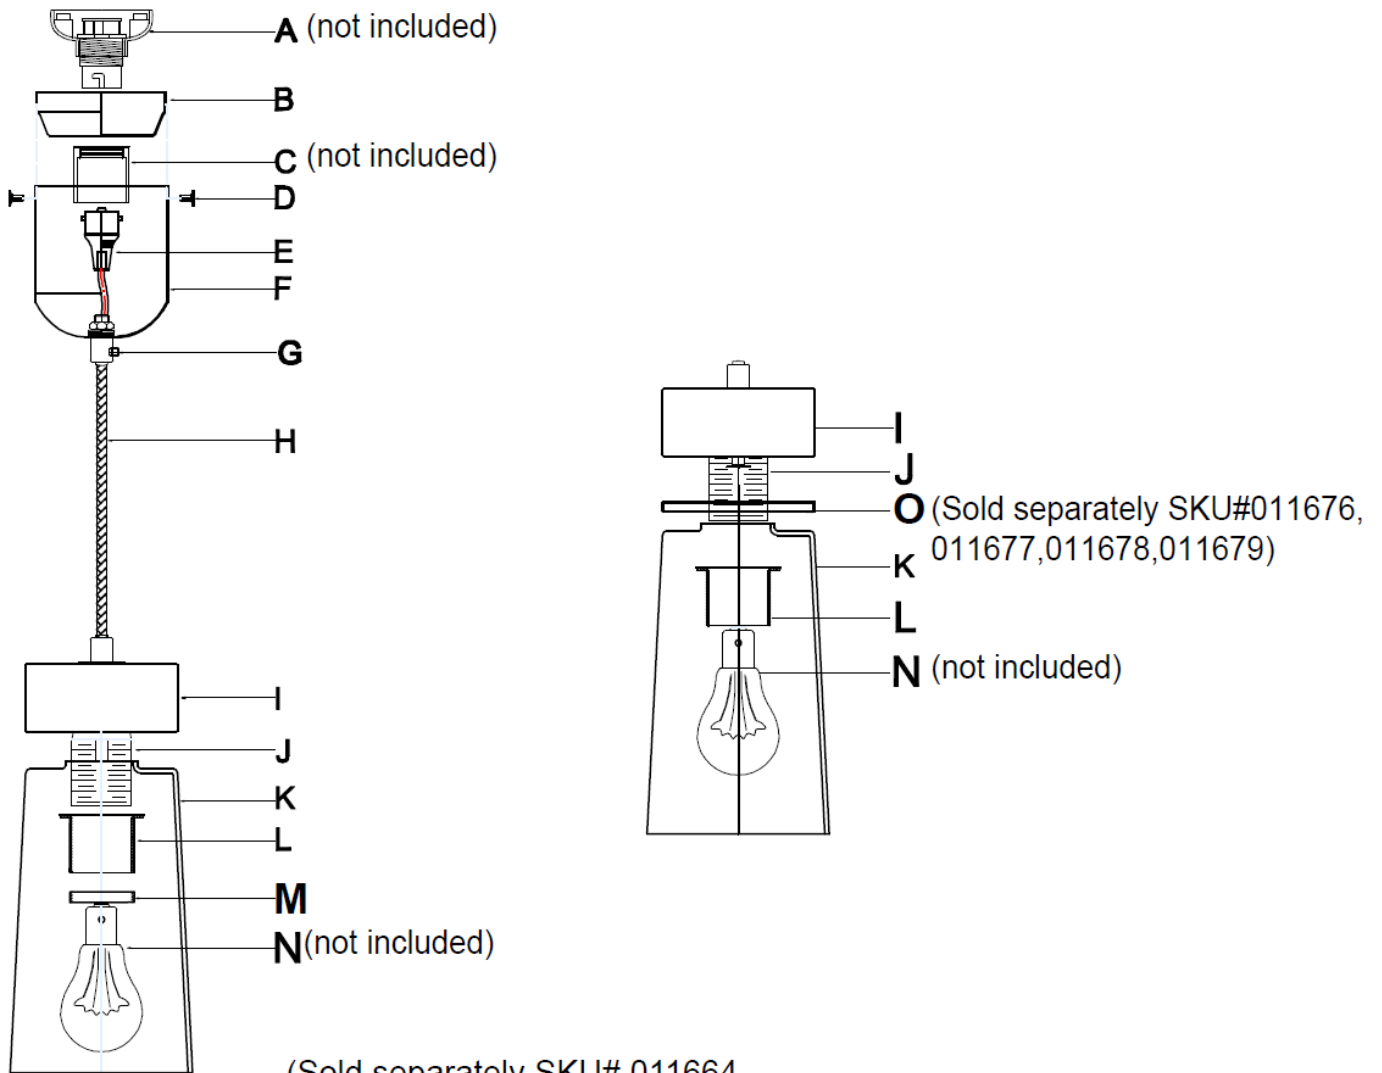

(Sold separately SKU# 011664,
011665, 011666, 011667, 011668,
011669, 011673, 011674, 011675)

NOTE: This luminaire is only compatible with the following shades (sold separately):

SKU# 011664, 011665, 011666, 011667, 011668, 011669, 011673, 011674, and 011675.

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the product in water or other liquids.

Specifications

SKU #	090750	090751	090752
Colour	Black	Black / Concrete	Black / Teak
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	28W Max.		
Lamp Holder	BC / B22		
Weight	0.5kg (without shade) 1.5kg (Max. weight with shade)		
Suspension	550mm		
Canopy size	H:105mm Dia:88mm		
Dimensions	H:100mm Dia:100mm Susp:550mm (without shade)		