

## JACKSON 1LT TRACK SPOTLIGHT

SKU# 151040, 151041, 151042, 151043

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

**NOTE: This installation instruction applies to the luminaire only.**

**When working with 240V, a licensed electrician is required.**

**Lucci track kit (SKU# 140020, 140022, 140057, 140058) and globe are sold separately.**

### Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.
- The warranty is subject to the luminaire being used with the Lucci track kit (sold separately).

### Installation Requirements


- Before installation, check the installation location has the Lucci track kit (sold separately) pre-installed on the ceiling. If it does not, please contact a licensed electrician to arrange installation before continuing.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - Only to be installed outside arms reach.
  - The mounting point must support 2 times the weight of the luminaire.
  - Ensure the luminaire is not installed in direct line of an air vent/system.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Do not exceed the maximum wattage rating.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Install a globe (C - not included) into the lamp holder with the globe installation tool. Do not exceed the maximum wattage rating.
3. Look at the track adaptor (A) and locate the side with the earth pin. Look at the Lucci track kit (not included) and locate the side which has the extra groove. The side with the extra groove is the side with the earth connection. Ensure the earth pin is installed into the same side of the Lucci track kit (not included) which has the extra groove.
4. Install the luminaire by twisting and locking it into the Lucci track kit (not included).
5. Rotate or swing light heads to adjust the lighting angle.

**Note: When adjusting the spot lights, do not adjust more than the angles showed in the figure as this may damage the wiring.**

6. After the installation, switch on the luminaire to test and enjoy your new lighting product.

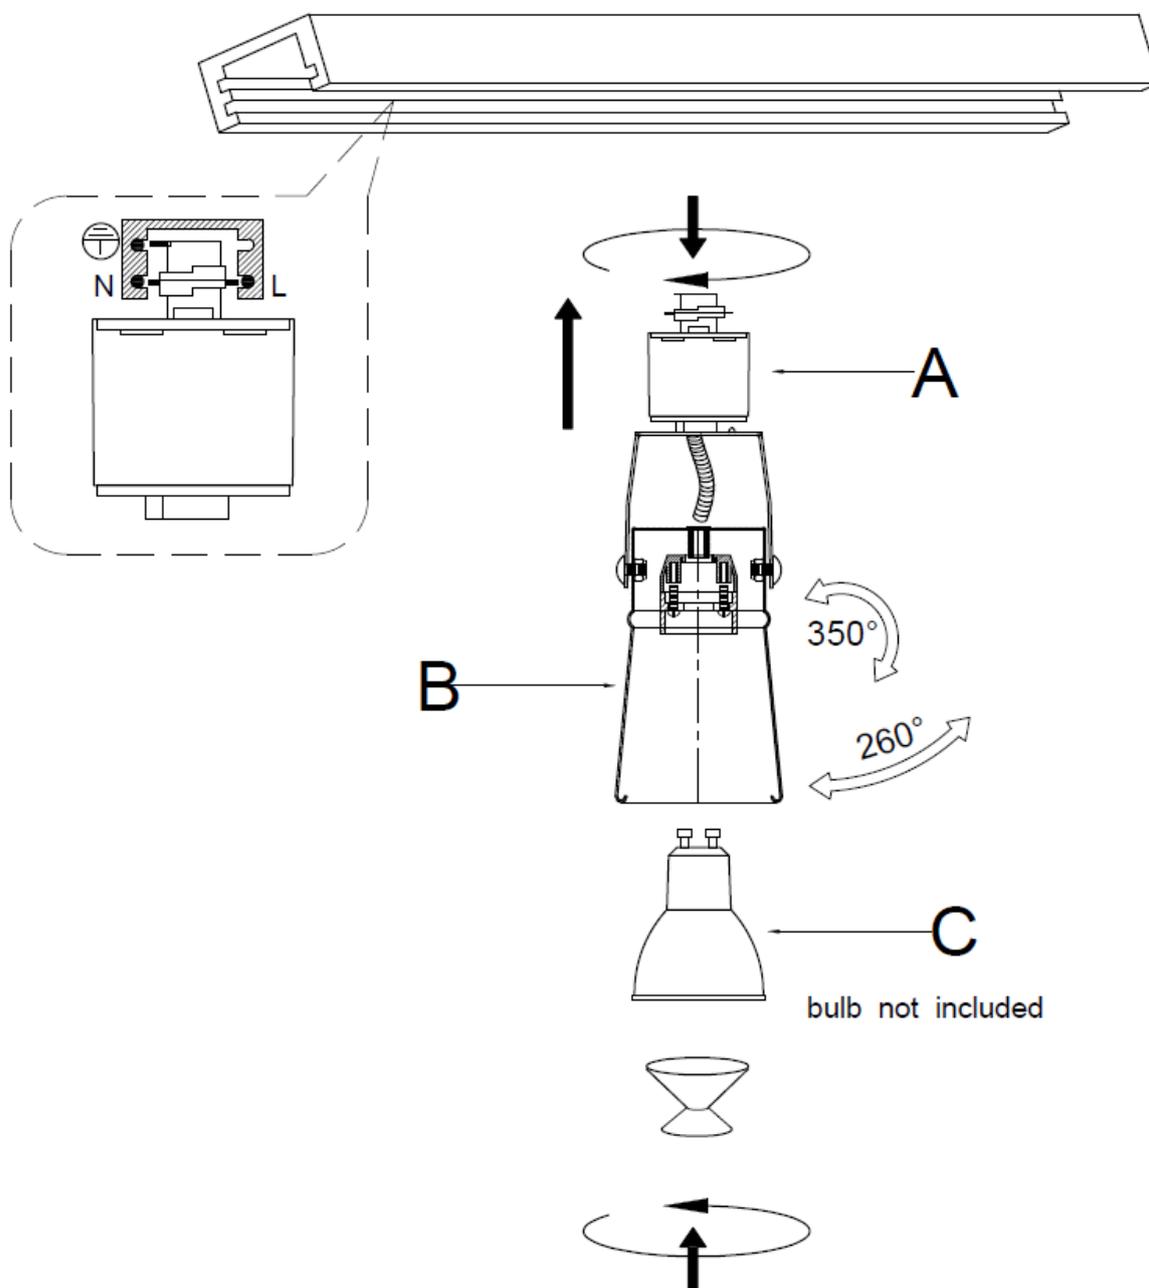

**NOTE:** When adjusting the spot lights, do not adjust more than the angles showed in the figure as this may damage the wiring.

**NOTE:** The side of the Lucci track kit (sold separately) with the extra groove, is the side with the earth connection.

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

SKU #	151040	151041	151042	151043
Colour	Black	White	Bronze	Nickel
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	40W MAX (1 x MAX. 40W globe)			
Lamp Holder	GU10			
Weight	0.2kg			
Dimensions	H:185mm W:110mm E:110mm Max			