

VEGAS LED RGB TRACK SPOTLIGHT

SKU# 151050, 151051

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3 year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not installed by a licensed electrician it will void the warranty.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed next to any air vent system.
 - When installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


Installation directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Install the track (1, not included) in a suitable location. **Fig A.**
3. Align the track spot adaptor (2) into the track (1) and rotate the lamp base (3) 90 degrees to lock it in. Ensure that the track spot adaptor (2) is compatible with the track (1) installed. **Fig B.**
4. Hold the lamp base and rotate the LED lamp head (4) to lighting angle according to your need. **Fig C.**
NOTE: When adjusting the lamp head (4), do not rotate more than 350° or 90° in either direction shown, as this may damage the internal wiring.
5. After the installation, switch on the luminaire to test and enjoy your new lighting product.

Switch on the power then set up the wireless & in-app control according to the '[Lucci CONNECT user guide](#)'.

NOTE: Turn on the Bluetooth function of your mobile phone before setting up.

NOTE: Low level dimming in the colour mode may result in inconsistent dimming levels.

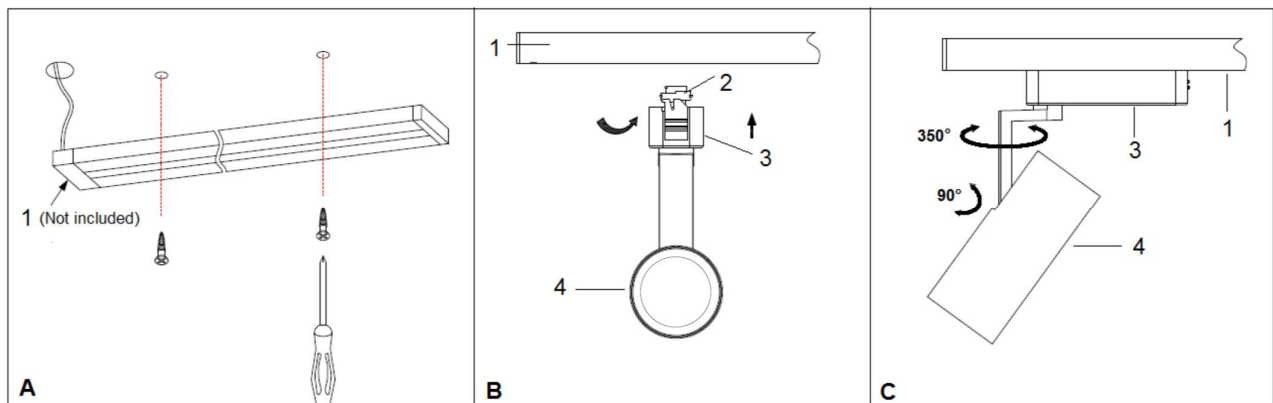

NOTE: When adjusting the lamp head (4), do not rotate more than 350° or 90° in either direction shown, as this may damage the internal wiring.

Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the luminaire with water.

| Specifications | | |
|----------------|--|--|
| SKU # | 151050 | 151051 |
| Colour | White | Black |
| Rated Voltage | 220-240V~ 50Hz | |
| Rated Wattage | 12W | |
| LED Specs | <p>2700 – 6500K, CRI>90, 650 lumens¹⁾, Dimmable²⁾</p> <p>1) Lumen results are shown when set at 4000K, which may vary at different CCT & RGB setting.</p> <p>2) Dimming via the Lucci Connect App, not suitable for use with dimmer switches.</p> | <p>2700 – 6500K, CRI>90, 430 lumens¹⁾, Dimmable²⁾</p> <p>1) Lumen results are shown when set at 4000K, which may vary at different CCT & RGB setting.</p> <p>2) Dimming via the Lucci Connect App, not suitable for use with dimmer switches.</p> |
| Weight | 0.5kg | |
| Dimensions | H:220mm L:240mm W:150mm Max. | |