

SICILY 16LT FLUSH MOUNT

SKU# 189174, 189177

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to local and national wiring rules. e.g. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This is a Class I luminaire and must be earthed during installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed in direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


Installation Directions

NOTE: Due to the size and weight of the luminaire, two people may be required to lift up the luminaire during installation.


Remove all packaging material from the luminaire and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.

1. Remove the mounting bracket from the luminaire by loosening the decorative cover and nut.
2. Use the mounting bracket as a template to mark the screw positions onto the ceiling.
3. Install the luminaire onto the ceiling by using appropriately sized mounting screws and anchors. Ensure the mounting screws and anchors used are suitable for the mounting surface and the surrounding environment.
4. To help with the installation, install the chain from the mounting bracket onto the luminaire by tightening the quick lock. The luminaire can be hung from the chain for easier installation.
5. Remove the cover from the terminal box and connect the mains supply wire to the terminal block.

Mains Supply Wire


Earth – Yellow/Green 
 Neutral – Blue or Black
 Live – Brown or Red

Fitting Wire

Yellow/Green 
 Blue (N)
 Brown (L)

Ensure that the wires are secure and no bare wires are exposed. Install the cover back over the terminal box.

6. Install the luminaire onto the mounting bracket and secure by tightening the nut and decorative cover.
7. Install the largest glass at the centre of the luminaire and work outwards with the medium size glass followed by the smallest glass on the outside.
8. Install the globes into the lamp holders (16 x 18W globes included). Do not touch the globes with bare hands as this will damage them; use a clean tissue or cloth instead. Any residue on the globes will decrease the life of the globe. Do not exceed the maximum rated wattage.
9. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

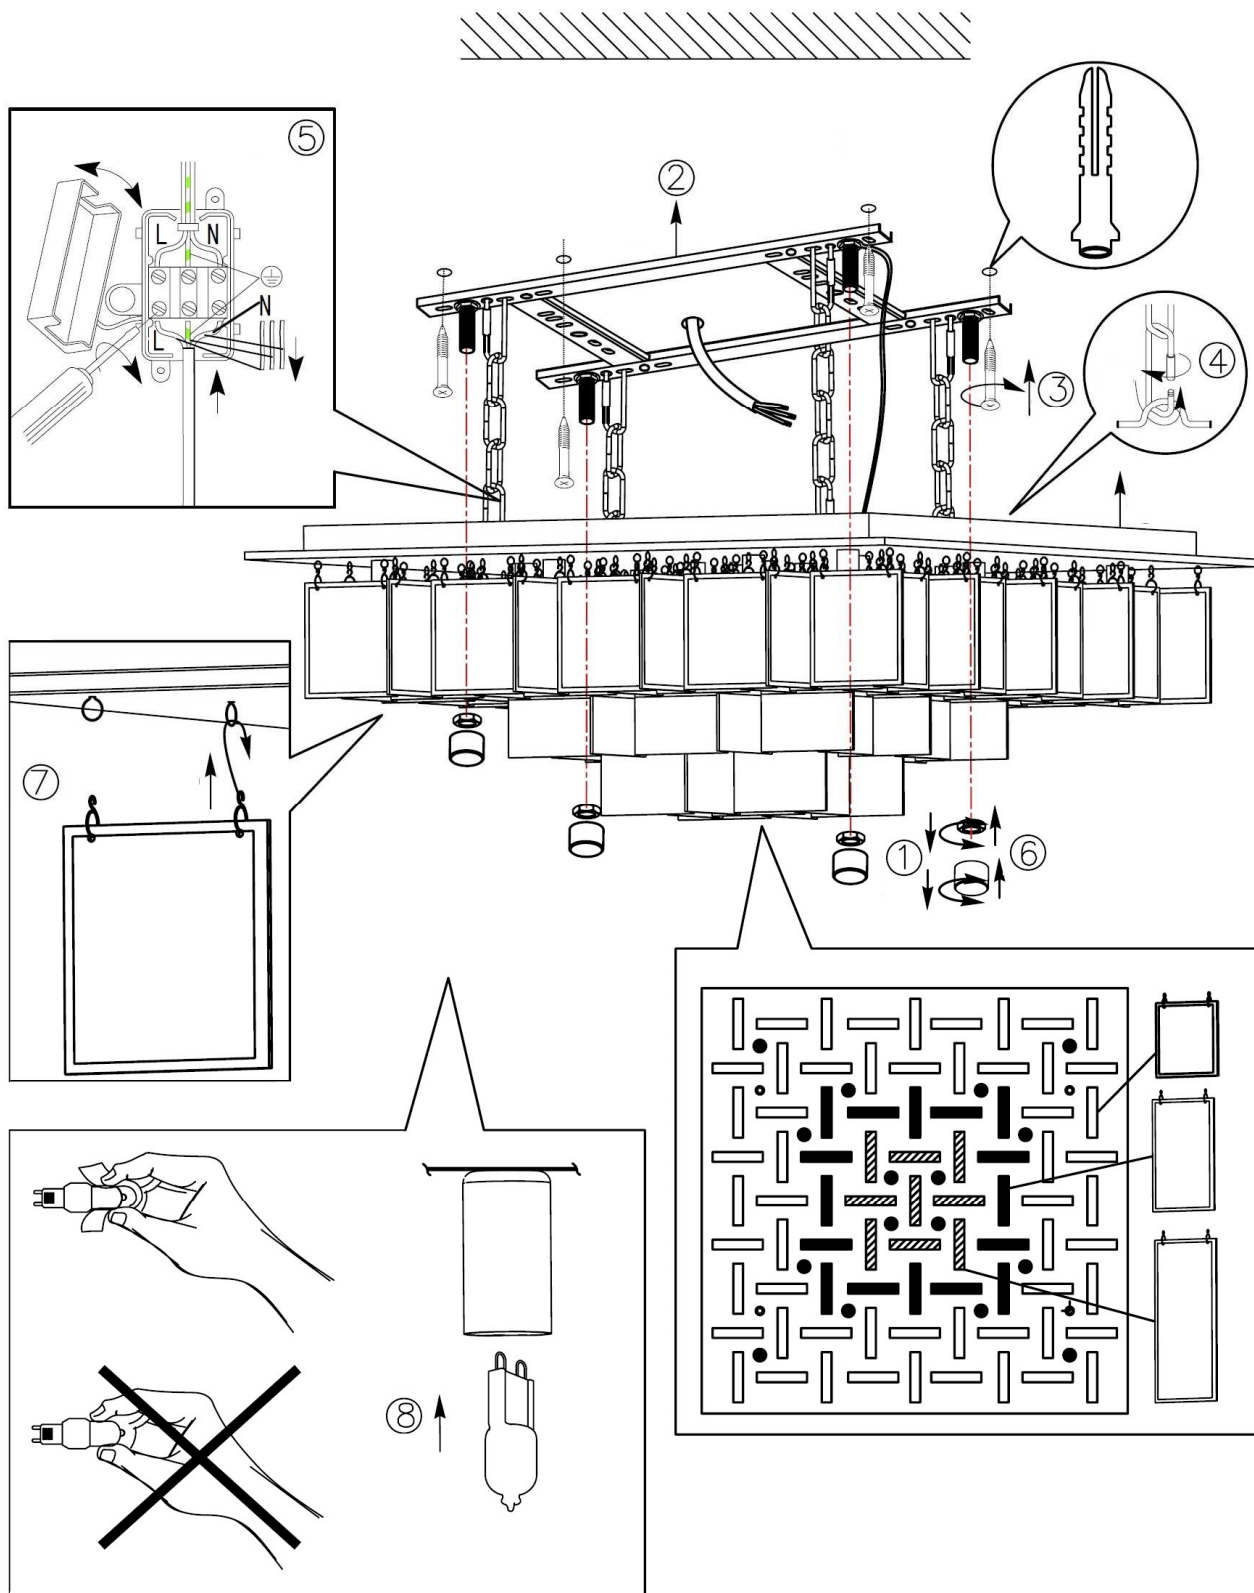

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	189174	189177
Supplier Model Nr.	203269	203266
Colour	Chrome/Frost Glass	White/Frost Glass
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	400W Max. (16x Max. 25W)	
Lamp Holder	G9	
Weight	18.7kg	
Dimensions	H:487mm L:770mm W:770mm	