

REFLECTION LED SWING ARM VANITY MIRROR

SKU# 190787, 190788

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- This luminaire has a built-in dimmer switch, do not install on a circuit which has a dimmer switch. The warranty will be void if the luminaire is used on the same circuit which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- This luminaire is rated IP44; this must be maintained during wiring and installation.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP44 standards, which is water splashing from any direction.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket from the luminaire by loosening the grub screws with the Allen key provided. (Fig. A)
3. Use the mounting bracket to mark the screw hole positions on the wall. (Fig. B).
4. Install the mounting bracket onto the wall by using appropriately sized mounting screws, screw gaskets and plastic anchors. Ensure the mounting screws and plastic anchors used are suitable for the mounting surface and the surrounding environment. (Fig. B)
5. Connect the mains supply wire to the terminal block. Ensure that the wires are secure and no bare wires are exposed. (Fig. C)

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal label


Yellow/Green or 

Blue or N

Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

6. Install the luminaire back onto the mounting bracket and secure by tightening the grub screws. (Fig. D)
7. Adjust the angle of luminaire to your desired angle. (Fig. E)
8. Short press the touch switch to turn the luminaire ON or OFF. (Fig. E)
While the luminaire is ON, press and hold the touch switch to adjust the brightness UP or DOWN.
9. Switch on the luminaire to test and enjoy your new lighting product.

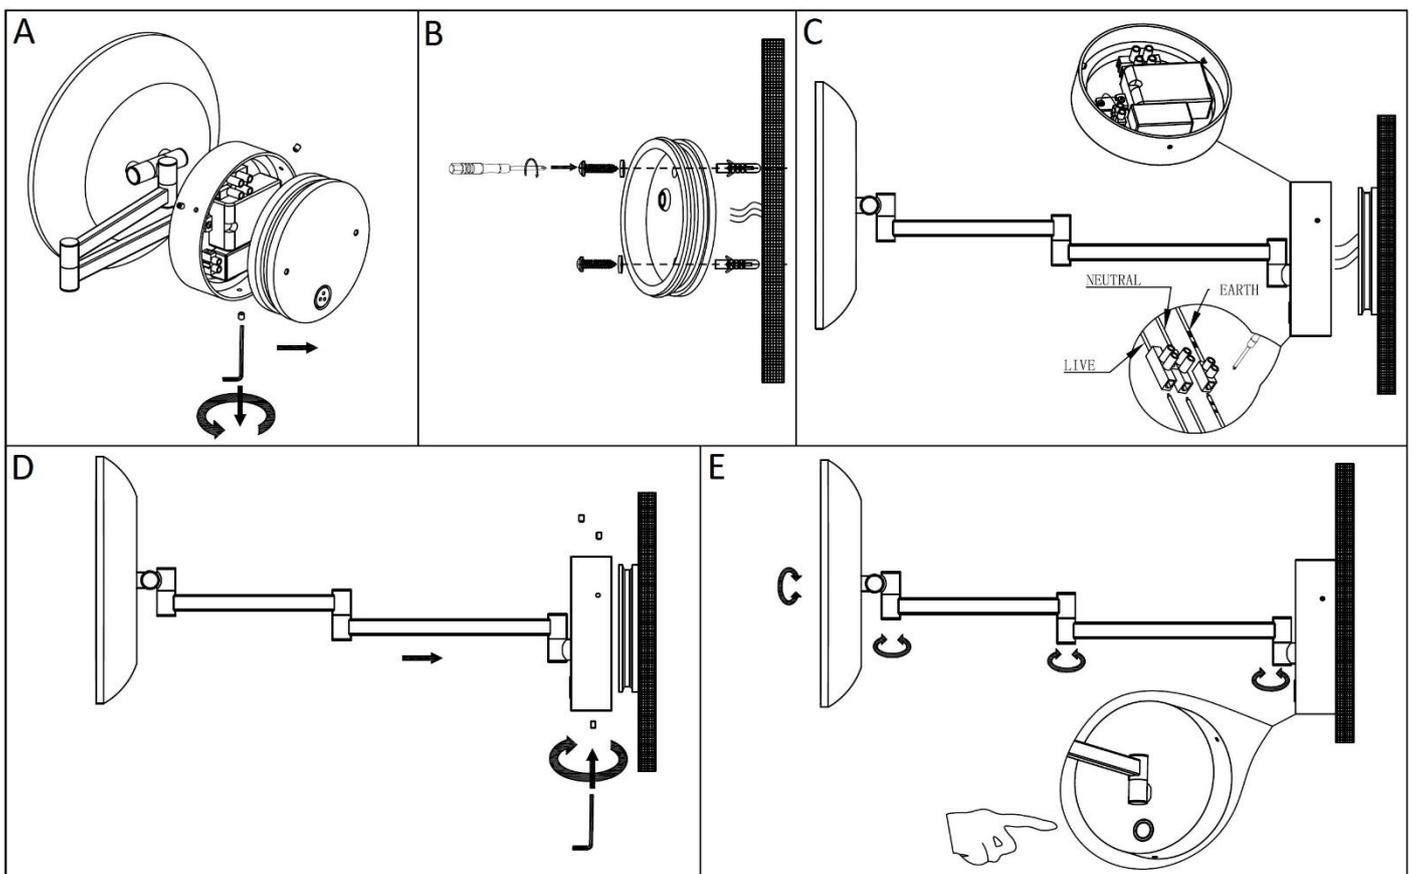

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.

Specification

SKU #	190787	190788
Colour	White	Black
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	12W	
Insulation Class	Class I	
IP Rating	IP44	
LED Specs	300 lumens, Cool White 4000K, CRI>90, Dimmable via touch button	
Weight	1.1kg	
Dimensions	H:200mm W:450mm E:385mm	